



This discussion paper is/has been under review for the journal Atmospheric Chemistry and Physics (ACP). Please refer to the corresponding final paper in ACP if available.

Emission factors of SO₂, NO_x and particles from ships in Neva Bay from ground-based and helicopter-borne measurements and AIS-based modeling

J. Beecken¹, J. Mellqvist¹, K. Salo¹, J. Ekholm¹, J.-P. Jalkanen², L. Johansson², V. Litvinenko³, K. Volodin³, and D. A. Frank-Kamenetsky⁴

¹Chalmers University of Technology, Earth and Space Sciences, Gothenburg, Sweden

²Finnish Meteorological Institute, Helsinki, Finland

³State Geological Unitary Company Mineral, St. Petersburg, Russia

⁴Committee for Nature Use, Environmental Protection and Ecological Safety, St. Petersburg, Russia

Received: 17 September 2014 – Accepted: 29 September 2014 – Published: 16 October 2014

Correspondence to: J. Beecken (beecken@chalmers.se)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

Emission factors of SO₂, NO_x and size distributed particle numbers were measured for approximately 300 different ships in the Gulf of Finland and Neva Bay area during two campaigns in August/September 2011 and June/July 2012. The measurements were carried out from a harbor vessel and from an MI-8 helicopter downwind of passing ships. Other measurements were carried out from shore sites near the island of Kronstadt and along the river Neva in the city area of Saint Petersburg. Most ships were running at reduced speed (10 knots), i.e. not at their optimal load. Vessels for domestic and international shipping were monitored. It was seen that the distribution of the SO₂ emission factors is bi-modal with averages of 4.6 g_{SO₂} kg_{fuel}⁻¹ and 18.2 g_{SO₂} kg_{fuel}⁻¹ for the lower and the higher mode, respectively. The emission factors show compliance with the 1 % fuel sulfur content SECA limit for 90 % of the vessels in 2011 and 97 % in 2012. The distribution of the NO_x emission factor is mono-modal with an average of 58 g_{NO_x} kg_{fuel}⁻¹. The corresponding emission related to the generated power yields an average of 12.1 g_{NO_x} kWh⁻¹. The distribution of the emission factors for particulate number shows that nearly 90 % of all particles in the 5.6 nm to 10 μm size range were below 70 nm in diameter. The distribution of the corresponding emission factors for the mass indicates two separated main modes, one for particles between 30 and 300 nm the other above 2 μm. The average particle emission factors were found to be in the range from 0.7 to 2.7 × 10¹⁶ particles kg_{fuel}⁻¹ and 0.2 to 3.4 g_{PM} kg_{fuel}⁻¹, respectively. The NO_x and particulate emissions are comparable with other studies. The measured emission factors were compared, for individual ships, to modeled ones using the Ship Traffic Emission Assessment Model (STEAM) of the Finnish Meteorological Institute. A reasonably good agreement for gaseous sulfur and nitrogen emissions can be seen for ships in international traffic, but significant deviations are found for inland vessels. Considering particulate mass, the modeled data is about two to three times above the measured results, which probably reflects the assumptions made in the modeled fuel sulfur content. The sulfur contents in the fuel retrieved from the measurements were

Emission factors of SO₂, NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



lower than the previously used assumptions by the city of Saint Petersburg when carrying out atmospheric modeling and using these measurements it was possible to better assess the impact of shipping on air quality.

1 Introduction

Shipping is a major means of transport. In 2012 about 9 billion tons of goods were transported by ships, corresponding to almost 80 % (UNCTAD, 2012) of the worldwide merchandise trade by volume, with about 4 % growth. As much as shipping is important as a means of transport it is also a source for air pollution. In earlier studies it is estimated that about 15 % of the anthropogenic NO_x emissions and 7 % of the SO₂ emissions are due to shipping. Of these emissions around 70 % occur within 400 km from land (Corbett et al., 1999). Gaseous and particle emissions from ships have significant impacts on nature, climate and human health. Corbett et al. (2007) estimate the number of humans dying prematurely due to emissions from ships to be 60 000 each year.

The significance of air pollution by ships has been acknowledged by policy makers on the global level. Under the umbrella of the International Maritime Organization (IMO) international limits have been agreed upon with the aim to reduce the emissions of SO_x and NO_x as agreed in the MARPOL Annex VI protocol. As a consequence a global cap of 3.5 % fuel sulfur content, by mass, is in effect since 2012. This cap is intended to be reduced to 0.5 % in 2020. However, there are stronger limits set for Sulfur Emission Control Areas (SECA), like the North Sea and the Baltic Sea. Here ships are not allowed to bunker fuel with more than 1 % sulfur content since 2010, which will be further reduced to 0.1 % in January 2015.

For marine diesel engines, there are different regulations for the emission of NO_x depending on the ships' construction dates. The caps defined under Tier 1 are valid for ships with engines built between the years 2000 and 2010. These caps are reduced in Tier 2 by 20 % for ships with engines built after 2011 and a further reduction of 80 % in

Emission factors of SO₂, NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tier 3 is intended for ships with engines built from the year 2016. For Tier 3 there will be exceptions for smaller recreational vessels and certain countries.

The coming requirements for low fuel sulfur content in the SECA areas will be rather costly for the shipping industry, and they have a strong concern, together with policy makers, that the new rules will not be obeyed. It is therefore suggested that the regulations are enforced by compliance monitoring to promote a level playing field within the shipping industry. Within the Swedish project Identification of Gross-Polluting Ships (IGPS) (Mellqvist and Berg, 2010; Beecken et al., 2014) a monitoring system has been developed for measuring gaseous and particulate emissions of individual ships within harbor areas and on the open sea, with the capability to check compliance with the new emission rules in the SECA areas.

Within the context above, measurements of ship emission factors were carried out for various air pollutants during two campaigns in the Neva Bay area and the Gulf of Finland in 2011 and 2012, respectively, as part of the IGPS-project and the EU project BSR-Innoship.

A new system for measuring ship emissions which was previously used on airborne platforms (Beecken et al., 2014) was applied for the first time for measurements from ground and boat. In this study the particulate measurements were extended to an upper particle size of 10 μm , instead of 500 nm, and a more precise total number counter was used. A considerable fraction of the ships measured in this study correspond to river barges and other ships running only in the eastern part of the Gulf of Finland and the river Neva, complementing the earlier study which corresponded primarily to ocean going ships, such as containers vessels, oil tankers and ferry boats. The measurements in 2011 were carried out at the transition period when Russia ratified the Annex VI protocol requiring maximum 1 % sulfur content in the fuel. Since very few real world emission measurements of ships have been conducted worldwide, especially in the eastern Baltic, there is a need for this type of data to be able to model ship emissions more accurately and subsequently carry out air quality modeling. The data derived in this study is compared to the STEAM model (Jalkanen et al., 2009, 2012; Jalkanen and

Emission factors of SO_2 , NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Johansson, 2013), which is widely used, i.e. within the Helcom community to model individual ship emissions and to estimate emissions on regional and global scale. The objective of this study was to help to re-adjust and refine this model and to demonstrate the performance of such a model.

2 Methods

The results presented in this paper were obtained using an extended system for the identification of gross-polluting ships (IGPS), (Mellqvist and Berg, 2010). A short overview on the instrumentation is given in Sect. 2.1. The system's main components are described in detail by Beecken et al. (2014). Additional components are an optical particle sizer for particles up to 10 μm and a condensation particle counter.

2.1 Instrumentation

CO_2 was measured with cavity ring-down spectroscopy (CRDS) (O'Keefe and Deacon, 1988) using a modified flight Picarro G2301-m greenhouse gas monitor with a response time, t_{90} , less than 1 s. The instrument produces a CO_2 , H_2O and CH_4 value once every second which is obtained by sequentially measuring the three species for about 0.3 s.

For determining the sulfur emission factor in form of SO_2 , a modified Thermo 43i-TLE trace gas monitor was used. An internal UV flash lamp stimulates fluorescence of the SO_2 which is proportional to its volume mixing ratio (VMR) (Luke, 1997). The instrument is custom-modified by elimination of a "hydrocarbon kicker", and larger pump speed yielding a response time, t_{90} , of about 2 s to allow flow rates for the detection of short and distinct plumes. The SO_2 instrument is cross-sensitive to NO, with a SO_2 VMR reading corresponding to 1.5% of the VMR of NO. The removal of the kicker, which is simply a Teflon tube coil, also makes the instrument cross sensitive to aromatic volatile organic compounds (VOC) with about 1% of the VOC VMR, but in most cases ships emit very little VOC, so this is only a problem when measuring in proximity

Emission factors of SO_2 , NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



to large VOC sources, such as refineries, since this may cause fluctuating background readings.

The emission factor of NO_x was obtained with a custom modified Thermo 42-TL trace gas monitor. A larger pump is used to obtain lower instrument pressure as well as a modification in the software, allowing the user to externally control whether NO , NO_x or the zero background should be measured, instead of continuously switching between measurement and zero background. The VMR of NO is determined by a chemiluminescent reaction of NO with ozone. The intensity of the emitted light is proportional to the VMR of NO (Kley and McFarland, 1980). The instrument uses a catalytic converter that converts the NO_2 to NO , so the sum of NO and NO_2 (NO_x) is obtained. The instrument has a response time, t_{90} , of 1 s.

An instrument based on electric mobility, the Engine Exhaust Particle Sizer (EEPS, TSI 3090), was applied to analyze the number size distribution in a range from 5.6 to 560 nm in 32 size channels. The particles in a stream of sampled air are charged by a corona and then forced to move in an electrical field which deflects them towards a column of electrodes (Johnson et al., 2004). The EEPS is originally intended for fast particle sizing of engine exhaust and due to its fast simultaneous sampling at 10 Hz and response time, t_{90} , of 0.5 s it also was found to be suitable for measurements of particulate ship emissions (Hallquist et al., 2013; Jonsson et al., 2011) even from aircraft (Beecken et al., 2014).

The size distribution of bigger particles was measured with an Optical Particle Sizer (OPS, TSI 3330). The OPS measures the backscattered intensity of light pulses onto a stream of sample air with particles. The number and size of the particles is determined from the detected backscattered light flashes. The diameter of the detected particles ranges from 0.3 to 10 μm and is binned into 16 size channels. The instruments response time, t_{90} , is 2 s.

The total number of particles was determined with TSI 3787 General Purpose Water-Based Condensation Particle Counter (CPC) (Hering et al., 2005). Sampled particles are grown in a supersaturated chamber and afterwards optically counted. This CPC

Emission factors of SO_2 , NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



measures particles bigger than 5 nm up to approximately 1 μm with a response time, t_{90} , of less than 0.3 s. The CPC was only used during the 2012 campaign.

2.2 Calculation of emission factors

The calculation of emission factors is similar for gas and particle data. The evaluation of sampled plumes is illustrated in Fig. 1. After the identification of a plume, a baseline is determined and subtracted from the in-plume values. The background corrected data, given in mixing ratios units (here in ppb or ppm), is integrated over the plume for each substituent X, and then normalized against the integrated CO_2 values according to Eq. (1). Furthermore, the calculated ratio is converted to a mass based emission factor, i.e. mass of pollutant vs. mass of fuel, by scaling with the molecular weights of the species X and fuel; the latter obtained as molecular weight of carbon corrected with the assumed carbon content of the fuel, i.e. 87%. Note that for the calculation of fuel sulfur content the species X is replaced by pure sulfur, e.g. $20 \text{ g}_{\text{SO}_2} \text{ kg}_{\text{fuel}}^{-1}$ corresponds to a fuel sulfur content (FSC) of 1%. In the case of NO_x , its molecular weight is assumed to correspond to NO_2 , following the IMO technical code MEPC.177(58).

It is common to compare the performance of different engines, especially for NO_x , by using load based emission factors, i.e. mass of pollutant vs. generated crank shaft power. In order to obtain this value (specific emission factor) the mass based emission factors is multiplied with the brake-specific fuel consumption (BSFC), which relates the consumed fuel to the generated power. This number, which varies between 160–250 $\text{g}_{\text{fuel}} \text{ kWh}^{-1}$ depending on ship type, was in this study obtained from the STEAM model data (Jalkanen et al., 2009, 2012), which in turn is based on ship specific data from the IHS Maritime ship register (IHS Global, 2014). In cases of no registered BSFC a default value of $200 \text{ g}_{\text{NO}_x} \text{ kWh}^{-1}$ was assumed.

$$\text{EF}(X)_{\text{g kg}_{\text{fuel}}^{-1}} = \frac{M(X) \cdot \Sigma(X_{\text{ppb}})}{M(C) \cdot \Sigma(\text{CO}_{2,\text{ppm}})/0.87} \quad (1)$$

Emission factors of SO_2 , NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Emission factors of
SO₂, NO_x and
particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



For the calculation of the particle number emission factor EF(PN) in Eq. (2), the excess number concentration per volume unit in the plumes was related to the excess mass concentration per volume unit of CO₂ (assumptions made: $T_{\text{avg}} = 290 \text{ K}$, $p_{\text{avg}} = 1013.25 \text{ Pa}$) using the ideal gas law, with the ideal gas constant $R = 8.314 \text{ J mol}^{-1} \text{ K}^{-1}$.

The emission factor of CO₂ is here calculated using Eq. (1).

$$\begin{aligned} \text{EF} \left(\text{PN}_{\left(\# \text{kg}_{\text{fuel}}^{-1} \right)} \right) &= \frac{\Sigma[\text{PN}_{\left(\# \text{m}^{-3} \right)}]}{\Sigma[\text{CO}_{2, \left(\text{kg m}^{-3} \right)}]} \cdot \text{EF}(\text{CO}_2) \\ &= \frac{\Sigma[\text{PN}_{\left(\# \text{m}^{-3} \right)}]}{\Sigma[\text{CO}_{2, \left(\text{ppm} \right)}] \cdot M(\text{CO}_{2, \left(\text{g} \right)}) \cdot \frac{p_{\text{avg}}}{R \cdot T_{\text{avg}}} \times 10^{-9}} \cdot \text{EF}(\text{CO}_2) \end{aligned} \quad (2)$$

The calculation of the emission factor of the particle mass is done analogue to Eq. (2) by substituting particle number (PN) with particle mass (PM). A unity density of 1 g cm^{-3} was arbitrarily assumed for the sake of qualitative comparison, although diesel particle density varies with composition and size between 0.5 and 1.23 g cm^{-3} for particles between 50 and 150 nm (Barone et al., 2011; Virtanen et al., 2002; Petzold et al., 2008). For the estimation of the emission factor of the particle mass the particle sized data from the EEPS and OPS instruments were used. The results for the particle sizers were additionally compensated for the actual size dependent diffusion losses under laminar flow conditions (Hinds, 1999).

The geometric mean diameter (GMD) was calculated using Eq. (3) (Hinds, 1999). It should be noted that the EEPS measures the particle diameter D_p depending on the electro-mobility of the particles while the OPS measures diameters depending on the optical properties of the particles.

$$\text{GMD}_{(\text{nm})} = \exp \left(\frac{\Sigma[n_i \cdot \ln(D_{p_i, \text{nm}})]}{N} \right) \quad (3)$$

between two adjacent calibration points. It was 0.2 and 0.7 % for CO₂ respectively for 2011 and 2012. For SO₂ it was 4.7 and 2.0 % and for NO_x 4.0 and 2.1 % for these years.

The size response of the particle sizers was validated for both campaigns with vaporized Di-Ethyl-Hexyl-Sebacat (DEHS) with particle diameters, D_p , between 200 and 300 nm during the campaigns with good agreement.

2.4 Uncertainties

The results of repeatedly measured plumes from the same ship were used to estimate the precision, i.e. random uncertainty, of the emission factor measurements from the helicopter. The 1σ precision values were 19.5 % for SO₂ and 23.7 % for NO_x, respectively, based on the mean precision of 12 ships that were measured at least 3 times.

For the ground measurements the random uncertainty is expected to be smaller, since the plumes were present considerably longer time, and the random uncertainties above are therefore considered as upper level.

The systematic uncertainties consist of the calibration uncertainties and the uncertainty by the model based retrieval of the BSFC. Furthermore, other studies indicate that the sulfur content may be systematically underestimated by 1–19 % when applying ratio measurement of SO₂ over CO₂, hence assuming that all sulfur is emitted in the form of SO₂ (Schlager et al., 2006; Agrawal et al., 2008; Moldanova et al., 2009, 2013; Balzani Lööv et al., 2013). Since the conclusions from these studies are quite inconsistent this potential uncertainty is not included in the error estimation here.

Following the IMO guidelines the carbon mass fraction in fuel varies between 85 and 87.5 % (MEPC, 2005). Whereof the carbon mass fraction of heavy fuel oil is closer to the lower end and diesel oil closer to the higher end of this interval. In this study a carbon mass fraction of 87 % was assumed in the calculation of the emission factors. The maximum error due to this assumption is approximately 2.4 %.

The overall measurement uncertainty is calculated as the root of sum of squares (RSS) of the systematic and random uncertainties. Where the uncertainties of the two campaigns were combined the higher uncertainty was taken into account. This yields

Emission factors of SO₂, NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



the total uncertainties of 21 and 26 % for the mass based emission factors of SO₂ and NO_x, respectively. For the calculation of the specific emission factor for NO_x an additional uncertainty of 11 % for the BSFC data is added, yielding a total uncertainty of 29 %.

The uncertainties above are comparable to estimates that were done in a previous study using the same system (Beecken et al., 2014), where the uncertainties in the mass based emission factors were 20 % for SO₂ and 24 % for NO_x, respectively. Alföldy et al. (2013) report similar uncertainties of 23 % for SO₂ and 26 % NO_x.

Following the instrument certificate, the EEPS was analyzed by the manufacturer (TSI) against a scanning mobility particle sizer (SMPS) system for particle size distribution accuracy and a CPC (TSI CPC 3022, $D_{p, \min} = 7$ nm) for total number accuracy using both 100 nm classified and polydisperse emery oil. According to the manufacturer's certificate, the deviation of particle size distribution was found to be less than 7 % and the deviation in total number less than 20 %.

Cross-comparison measurements of the EEPS were performed at our laboratory with a SMPS (TSI DMA 3081 and TSI CPC 3787) with ammonium sulfate at concentrations between 1.85×10^{11} and 8.36×10^{11} particles m⁻³. It was found that the GMDs in a size region around 30 nm measured with the EEPS are around 14 % below those measured with the SMPS. In this study it is assumed that the CPC counts all particles. The SMPS System which was used in this comparison was validated with standardized polystyrene latex (PLS) spheres of known sizes between 70 and 500 nm. From the deviations it was seen that the particle diameters were underestimated by EEPS by less than 1 % at an offset of less than 7 nm. In addition when comparing the EEPS total number with the CPC values it was observed that the total particle numbers measured with the CPC were 34 % higher on average than the EEPS total particle number data. A similar discrepancy when comparing the same type of instruments has been observed in another study (Jonsson et al., 2011), and considering that CPCs are considered very accurate in counting particles, this hence indicates a 30 % loss rate of particles in the EEPS.

Emission factors of SO₂, NO_x and particles from ships

J. Beecken et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

In this study it was not possible to perform any cross validations for the OPS. Instead the manufacturer's quality assurance certificates have to be relied on in the error estimation, corresponding to an uncertainty in size resolution of 3.5 % and in number better than 10 % for particles around 0.5 μm .

2.5 Ship emission modeling

The STEAM model generates ship specific emissions of CO_2 , SO_2 , NO_x and particulates at the time and location of the actual ships (Jalkanen et al., 2009, 2012; Jalkanen and Johansson, 2013). The model uses as input values the position reports generated by the automatic identification system (AIS), this system is globally on-board every vessel that weighs more than 300 tonnes. The AIS system provides automatic updates of the positions and instantaneous speeds of ships at intervals of a few seconds. The model requires as input also the detailed technical specifications of all fuel consuming systems on-board and other relevant technical details of the ships, taken from the IHS Maritime ship register (IHS Global, 2014), for all the ships.

The propelling power of each ship is predicted as a function of its speed. In STEAM, the fuel type and sulfur content for different engines are assigned on a per vessel basis and for main and auxiliary engines separately. If the sulfur content of the fuel is known explicitly, it is used by the model. In any other case the sulfur content is determined by engine properties (engine power, angular velocity and stroke type) according to the classification proposed by Kuiken (2008). The NO_x emissions are modeled according to IMO three tier approach as a function of engine angular velocity (revolutions per minute). For vessels built before year 2000, the so-called Tier 0 ships, the NO_x emission factors 10 % above the Tier 1 level is assigned (Starcrest, 2012). Emission factors for PM are determined based on the FSC as described in Jalkanen et al. (2012). This approach assumes a linear relationship between sulfate aerosol formation and fuel sulfur content, but engine load level changes to sulfur-sulfate conversion efficiency were not modeled. Note that when comparing measurements and the STEAM model calculated

Emission factors of SO_2 , NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



performed during the night from 20 to 21 August 2011 studying the traffic on the Bolshaya Neva river arm near the Blagoveshchenskiy Bridge, while the bridges were open for ship traffic. The sample inlets were 6.5 m a.s.l.

Measurements from onboard the MI-8 helicopter, Fig. 3, were conducted between 5 and 10 July 2012, with about 17 flight hours in total. In the helicopter a probe was used that was pointed straight out, with 50 cm distance to the fuselage. To minimize the influence of downwash from the rotor the helicopter was operated at a steady forward motion, usually between 40 and 70 knots. This minimized variations in the CO₂ values that were interpreted as turbulence caused by the rotor. The typical flight altitude was around 65 m above sea surface to be able to sample the ship plumes and the helicopter generally flew outside the Neva Bay, as illustrated in Fig. 2.

During the helicopter measurements, larger ships were predominantly chosen for the measurements while for the ground based measurements plumes of any of the passing ships were measured, since the latter were done in a passive manner.

The domestic vessels are divided into cargo boats (Nevskiy vessels) and tankers (Volgoneft), operating on the Neva river and the east part of the Gulf of Finland and fast hydrofoil ferries traveling between the city of St. Petersburg and Peterhof.

The measured data was compared to the modeled data using the STEAM ship emission model.

4 Results and discussion

In total 466 plumes from 311 different vessels were observed, whereof 434 plumes during the ground-based measurements and 32 plumes from the helicopter. Most of the plumes which were measured from the helicopter were sampled repeatedly for the same vessel.

Emission factors of SO₂, NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



4.1 Sulfur dioxide

The frequency distribution of the measured SO₂ emission factors is shown in Fig. 4. The distributions of the ground-based measurements show that there are two prominent modes separated by the gap at 12 g_{SO₂} kg_{fuel}⁻¹ with about 50 % of the measurements on either side. The median emission in the lower mode is about 4.6 g_{SO₂} kg_{fuel}⁻¹ while the 1st and 3rd quartiles can be found at 2.7 and 7.5 g_{SO₂} kg_{fuel}⁻¹, respectively. The corresponding median in the higher mode is 18.2 g_{SO₂} kg_{fuel}⁻¹, and 15.4 and 21.3 g_{SO₂} kg_{fuel}⁻¹ for the 1st and 3rd quartiles. The distribution of the helicopter-borne measured emission factors are almost entirely located around 20 g_{SO₂} kg_{fuel}⁻¹.

The emission factors of SO₂ for different ship types are shown in Fig. 5. Nearly all values are below 20 g_{SO₂} kg_{fuel}⁻¹. Yet, a clear difference in the sulfur emission can be seen for the different types. Vessels which are operated mostly on domestic waters, i.e. fast ferries, Nevskiy class cargo vessels, Volgoneft tankers and tugs were emitting less than 10 g_{SO₂} kg_{fuel}⁻¹, indicating low fuel sulfur content, whilst the internationally operating ships had higher fuel sulfur contents.

The measured SO₂ emission factors indicate that there was a reduction of 13 % in the sulfur emission factors between 2011 and 2012, with 80 % of the plumes corresponding to emission factors below 21.2 g_{SO₂} kg_{fuel}⁻¹ in 2011 and below 18.4 g_{SO₂} kg_{fuel}⁻¹ in 2012, respectively. The results obtained from ground based measurement in Neva Bay 2011 and 2012 indicate that 90 and 97 %, respectively, of the ships complied with IMO FSC limit of 1 %, when taking the measurement uncertainty into account. The 32 ships measured outside Neva Bay from the helicopter all complied with the IMO sulfur limits.

4.2 Nitrogen oxides

In Fig. 6 it can be seen that the NO_x emission factors are distributed around a single peak. The median of the NO_x emission related to the amount of consumed fuel can

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



be found at $58 \text{ g}_{\text{NO}_x} \text{ kg}_{\text{fuel}}^{-1}$ and the 1st and 3rd quartiles at 44 and $70 \text{ g}_{\text{NO}_x} \text{ kg}_{\text{fuel}}^{-1}$. The measured median NO_x emission factor in this study is 12% below the average value found by Williams et al. (2009), probably due the fact that most ships were running at low speed with relatively low loads (Borkowski et al., 2011). These lower values are consistent with other studies (Alföldy et al., 2013; Pirjola et al., 2014) also taking place in harbor areas or channels where ships were running at reduced speed (Cappa et al., 2014).

For the power related emission the corresponding median is at $12.1 \text{ g}_{\text{NO}_x} \text{ kWh}^{-1}$ and the 1st and 3rd quartiles at 9.1 and $14.4 \text{ g}_{\text{NO}_x} \text{ kWh}^{-1}$. The NO_x emission factors are shown for different ship types in Fig. 5.

4.3 Particulate matter

The normalized size distributions in number, $\text{EF}(\text{PN})$, and mass units, $\text{EF}(\text{PM})$, for individual plume measurements are shown in Fig. 7. Ninety percent of the measured particles were smaller than 70 nm. It can be seen that the 10th to the 90th percentile range of the GMDs is between 24 and 53 nm. In a similar study (Jonsson et al., 2011), in the harbor of Gothenburg in Sweden, measurements were carried out from about the same distance as in this study, and in this case the GMD values were between 21 and 39 nm for six selected ships, consistent with the data given in this paper. The graph showing $\text{EF}(\text{PN})$ also indicates the presence of a second smaller particle mode with diameters of about 10 nm, probably corresponding to fresh particles produced in the flue gas, which is also observed in other studies (Hallquist et al., 2013; Moldanová et al., 2013). Around 70% of the total measured $\text{EF}(\text{PM})$ particulate mass below $10 \mu\text{m}$ consists of particles smaller than 300 nm. In the distribution of the particle mass emission factor, two separate size regions were identified to contribute to the mass, one for particles from 30 to 300 nm and the other for particles above $2 \mu\text{m}$. This is based on the assumption that all measured particles have spherical shape and unit density.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



trigger this behavior in the model and NO_x emission factors defined by engine rpm and IMO NO_x curve are then applied.

Large differences between modeled and measured emissions can be seen for particles, Fig. 10. This might be partly due to the assumed unity density, the limited size range for the measured data and assumptions made in the FSC in STEAM. Large discrepancies can be anticipated in cases when a vessel is using low sulfur fuel regardless of the engine properties, which would indicate the capability to use residual fuels. In STEAM, the cheapest possible fuel (with higher sulfur content) is assigned to vessels, defined by geographical limitations (SECA/non-SECA, local legislation for port areas) and technical feasibility of using residual fuel.

Some differences between the modeled and measured results can be explained by unknown parameters for certain domestic ships, for which standard parameters for small vessels were used. Small vessels in domestic operations do not need to undergo the IMO registry procedure and the level of technical details of these vessels in STEAM database is low. For this reason, small vessels are assigned the generic tugboat type, which is bound to lead to inaccuracies in vessel performance and emissions calculations.

It was clearly observed in the modeling results that the misallocation of FSC for ships, especially for domestic traffic using low sulfur fuel, will easily lead to SO_x and PM emission factors of which the latter are over twice higher than what was measured in this work. However, the model does not allow higher fuel sulfur content to be used for vessels than what is allowed by current legislation unless the user assigns the fuel sulfur content manually. Currently, there is no centralized registry for the properties of fuel used in each vessel which makes emission modeling challenging for SO_x and PM. In this regard, the work reported improves the knowledge of the fuel sulfur content of the Baltic Sea shipping.

Emission factors of SO₂, NO_x and particles from ships

J. Beecken et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Baltic are passing along this way. Furthermore, these measurements were conducted over several days, where both, day and night traffic, was observed.

The strength of the helicopter-based measurements was that a greater sea area could be covered and the emissions of more ships could be measured within short time. The ships could be arbitrarily selected and inspected. Further, it was possible to cross the same plume several times to decrease uncertainty.

The measured data was compared to modeled data using the STEAM model of the Finnish Meteorological Institute. The result indicated that the assumed FSC might be overestimated by the model for certain ship types, especially those engaging on domestic traffic. Overall, the NO_x emissions compared well with the modeled results while there is a significant difference concerning the particle emissions which is probably due to uncertainties in fuel sulfur content assumptions made in STEAM.

The Supplement related to this article is available online at doi:10.5194/acpd-14-25931-2014-supplement.

Acknowledgements. The Swedish innovation agency Vinnova and the Swedish Environmental Protection agency are acknowledged for financial support for the development of the IGPS measurement system through the projects IGPS-2005-01835 and IGPS-plus-2008-03884. The measurements campaigns in Russia were financially supported by the Baltic Sea cooperation for reducing ship and port emissions, BSR InnoShip.

References

- Agrawal, H., Malloy, Q. G. J., Welch, W. A., Wayne Miller, J., and Cocker, D. R.: In-use gaseous and particulate matter emissions from a modern ocean going container vessel, *Atmos. Environ.*, 42, 5504–5510, doi:10.1016/j.atmosenv.2008.02.053, 2008.
- Alföldy, B., Lööv, J. B., Lagler, F., Mellqvist, J., Berg, N., Beecken, J., Weststrate, H., Duyzer, J., Bencs, L., Horemans, B., Cavalli, F., Putaud, J.-P., Janssens-Maenhout, G., Csordás, A. P., Van Grieken, R., Borowiak, A., and Hjorth, J.: Measurements of air pollution emission factors for marine transportation in SECA, *Atmos. Meas. Tech.*, 6, 1777–1791, doi:10.5194/amt-6-1777-2013, 2013.

Emission factors of SO₂, NO_x and particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Emission factors of
SO₂, NO_x and
particles from ships**

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Balzani Lööv, J. M., Alfoldy, B., Gast, L. F. L., Hjorth, J., Lagler, F., Mellqvist, J., Beecken, J., Berg, N., Duyzer, J., Westrate, H., Swart, D. P. J., Berkhout, A. J. C., Jalkanen, J.-P., Prata, A. J., van der Hoff, G. R., and Borowiak, A.: Field test of available methods to measure remotely SO_x and NO_x emissions from ships, *Atmos. Meas. Tech.*, 7, 2597–2613, doi:10.5194/amt-7-2597-2014, 2014.

Barone, T. L., Lall, A. A., Storey, J. M. E., Mulholland, G. W., Prikhodko, V. Y., Frankland, J. H., Parks, J. E., and Zachariah, M. R.: Size-resolved density measurements of particle emissions from an advanced combustion diesel engine: effect of aggregate morphology, *Energ. Fuel.*, 25, 1978–1988, 2011.

Beecken, J., Mellqvist, J., Salo, K., Ekholm, J., and Jalkanen, J.-P.: Airborne emission measurements of SO₂, NO_x and particles from individual ships using a sniffer technique, *Atmos. Meas. Tech.*, 7, 1957–1968, doi:10.5194/amt-7-1957-2014, 2014.

Borkowski, T., Kasyk, L., and Kowalak, P.: Assessment of ship's engine effective power, fuel consumption and emission using the vessel speed, *Journal of KONES*, 18, 31–39, 2011.

Cappa, C. D., Williams, E. J., Lack, D. A., Buffaloe, G. M., Coffman, D., Hayden, K. L., Herndon, S. C., Lerner, B. M., Li, S. M., Massoli, P., McLaren, R., Nuaaman, I., Onasch, T. B., and Quinn, P. K.: A case study into the measurement of ship emissions from plume intercepts of the NOAA ship Miller Freeman, *Atmos. Chem. Phys.*, 14, 1337–1352, 2014, <http://www.atmos-chem-phys.net/14/1337/2014/>.

Corbett, J. J., Fischbeck, P. S., and Pandis, S. N.: Global nitrogen and sulfur inventories for oceangoing ships, *J. Geophys. Res.-Atmos.*, 104, 3457–3470, 1999.

Corbett, J. J., Winebrake, J. J., Green, E. H., Kasibhatla, P., Eyring, V., and Lauer, A.: Mortality from ship emissions: a global assessment, *Environ. Sci. Technol.*, 41, 8512–8518, 2007.

Hallquist, Å. M., Fridell, E., Westerlund, J., and Hallquist, M.: Onboard measurements of nanoparticles from a SCR-equipped marine diesel engine, *Environ. Sci. Technol.*, 47, 773–780, 2013.

Hering, S. V., Stolzenburg, M. R., Quant, F. R., O'Berreit, D. R., and Keady, P. B.: A laminar-flow, water-based condensation particle counter (WCPC), *Aerosol Sci. Tech.*, 39, 659–672, 2005.

Hinds, W. C.: *Aerosol Technology: Properties, Behavior, and Measurement of Airborne Particles*, Wiley, New York, 1999.

IHS Global: *IHS Maritime*, Chemin de la Mairie, Perly, Geneva, Switzerland, 2014.

**Emission factors of
SO₂, NO_x and
particles from ships**

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Jalkanen, J.-P., Brink, A., Kalli, J., Pettersson, H., Kukkonen, J., and Stipa, T.: A modelling system for the exhaust emissions of marine traffic and its application in the Baltic Sea area, *Atmos. Chem. Phys.*, 9, 9209–9223, doi:10.5194/acp-9-9209-2009, 2009.

Jalkanen, J. P. and Johansson, L.: Emissions from Baltic Sea shipping in 2012, available at: <http://www.helcom.fi/baltic-sea-trends/environment-fact-sheets/hazardous-substances/emissions-from-baltic-sea-shipping/> (last access: 28 August 2014), 2013.

Jalkanen, J. P., Johansson, L., Kukkonen, J., Brink, A., Kalli, J., and Stipa, T.: Extension of an assessment model of ship traffic exhaust emissions for particulate matter and carbon monoxide, *Atmos. Chem. Phys.*, 12, 2641–2659, 2012, <http://www.atmos-chem-phys.net/12/2641/2012/>.

Johnson, T., Caldow, R., Pöcher, A., Mirme, A., and Kittelson, D.: A new electrical mobility particle sizer spectrometer for engine exhaust particle measurements, SAE Technical Paper 2004-1-1341, 2004 SAE World Congress Detroit (MI), United States, doi:10.4271/2004-01-1341, 2004.

Jonsson, A. M., Westerlund, J., and Hallquist, M.: Size-resolved particle emission factors for individual ships, *Geophys. Res. Lett.*, 38, L13809, doi:10.1029/2011GL047672, 2011.

Kley, D. and McFarland, M.: Chemiluminescence detector for NO and NO₂, *Atmos. Technol.*, 12, 63–69, 1980.

Krylov, B. S., Novikov, L. A., and Frank-Kamenetsky, D. A.: Opredeleniye massy vrednykh (zagyaznyayushchikh) veshchestv, vybrasyvayemykh vodnym transportom v atmosferu Sankt-Peterburga [Determining the mass of harmful substances (pollutants) emitted into the atmosphere waterways of St. Petersburg], *Okhrana atmosfernogo vozdukh. Atmosfera [Air Protection. Atmosphere]*, SRI Atmosphere, St. Petersburg, Russia, 1, 21, 2012.

Kuiken, K.: Diesel Engines for Ship Propulsion and Power Plants Vol. 1, Target Global Energy Training, Onnen, the Netherlands, 2008.

Lack, D. A., Cappa, C. D., Langridge, J., Bahreini, R., Buffaloe, G., Brock, C., Cerully, K., Coffman, D., Hayden, K., Holloway, J., Lerner, B., Massoli, P., Li, S. M., McLaren, R., Middlebrook, A. M., Moore, R., Nenes, A., Nuaaman, I., Onasch, T. B., Peischl, J., Perring, A., Quinn, P. K., Ryerson, T., Schwartz, J. P., Spackman, R., Wofsy, S. C., Worsnop, D., Xi-ang, B., and Williams, E.: Impact of fuel quality regulation and speed reductions on shipping emissions: implications for climate and air quality, *Environ. Sci. Technol.*, 45, 9052–9060, doi:10.1021/es2013424, 2011.

**Emission factors of
SO₂, NO_x and
particles from ships**

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Luke, W. T.: Evaluation of a commercial pulsed fluorescence detector for the measurement of low-level SO₂ concentrations during the gas-phase sulfur intercomparison experiment, *J. Geophys. Res.-Atmos.*, 102, 16255–16265, 1997.
- Mellqvist, J. and Berg, N.: Final Report to Vinnova: Identification of Gross Polluting Ships, RG Report No. 4, ISSN 1653 333X, Chalmers University of Technology, Göteborg, 2010.
- MEPC: Interim Guidelines for Voluntary Ship CO₂ Emission Indexing for Use in Trials, London, United Kingdom, 2005.
- MEPC: Marine Environment Protection Committee, Amendments to the technical code on control of emission of nitrogen oxides from marine diesel engines – NO_x Technical Code, IMO, London, United Kingdom, 2008.
- Moldanová, J., Fridell, E., Popovicheva, O., Demirdjian, B., Tishkova, V., Faccinnetto, A., and Focsa, C.: Characterisation of particulate matter and gaseous emissions from a large ship diesel engine, *Atmos. Environ.*, 43, 2632–2641, doi:10.1016/j.atmosenv.2009.02.008, 2009.
- Moldanová, J., Fridell, E., Winnes, H., Holmin-Fridell, S., Boman, J., Jedynska, A., Tishkova, V., Demirdjian, B., Joulie, S., Bladt, H., Ivleva, N. P., and Niessner, R.: Physical and chemical characterisation of PM emissions from two ships operating in European Emission Control Areas, *Atmos. Meas. Tech.*, 6, 3577–3596, doi:10.5194/amt-6-3577-2013, 2013.
- Murphy, S., Agrawal, H., Sorooshian, A., Padró, L. T., Gates, H., Hersey, S., Welch, W. A., Jung, H., Miller, J. W., Cocker III, D. R., Nenes, A., Jonsson, H. H., Flagan, R. C., and Seinfeld, J. H.: Comprehensive simultaneous shipboard and airborne characterization of exhaust from a modern container ship at sea, *Environ. Sci. Technol.*, 43, 4626–4640, 2009.
- O’Keefe, A. and Deacon, D. A. G.: Cavity ring-down optical spectrometer for absorption measurements using pulsed laser sources, *Rev. Sci. Instrum.*, 59, 2544–2551, 1988.
- Petzold, A., Hasselbach, J., Lauer, P., Baumann, R., Franke, K., Gurk, C., Schlager, H., and Weingartner, E.: Experimental studies on particle emissions from cruising ship, their characteristic properties, transformation and atmospheric lifetime in the marine boundary layer, *Atmos. Chem. Phys.*, 8, 2387–2403, doi:10.5194/acp-8-2387-2008, 2008.
- Pirjola, L., Pajunoja, A., Walden, J., Jalkanen, J.-P., Rönkkö, T., Kousa, A., and Koskentalo, T.: Mobile measurements of ship emissions in two harbour areas in Finland, *Atmos. Meas. Tech.*, 7, 149–161, doi:10.5194/amt-7-149-2014, 2014.
- Schlager, H., Baumann, R., Lichtenstern, M., Petzold, A., Arnold, F., Speidel, M., Gurk, C., and Fischer, H.: Aircraft-based Trace Gas Measurements in a Primary European Ship Corridor, TAC-Conference, Oxford, UK, 83–88, 2006.

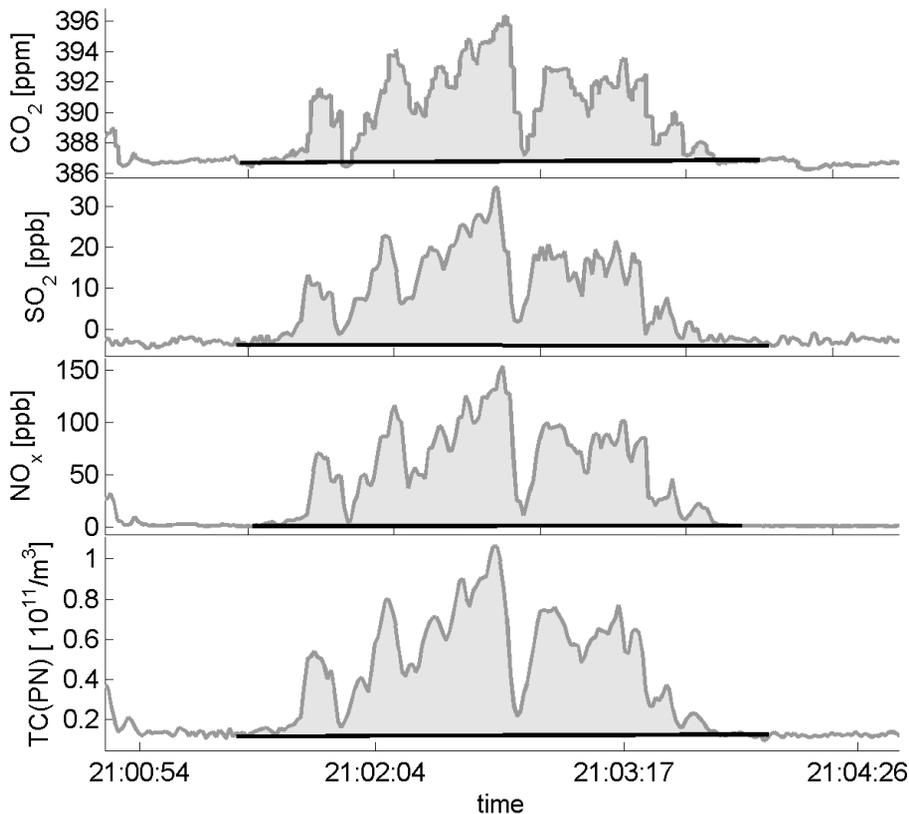


Figure 1. Example of plume evaluation on a typical plume, here from the Ro-Ro cargo ship “Pauline Russ”. The signal of three gas channels and one particle channel are shown as a grey line. The black line is the found background baseline to be subtracted from the plume. The plume’s signal is integrated over time (greyish area). The ratio of the areas of SO_2 and NO_x to CO_2 is used for further calculation of the emission factors.

Emission factors of SO_2 , NO_x and particles from ships

J. Beecken et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Emission factors of SO₂, NO_x and particles from ships

J. Beecken et al.

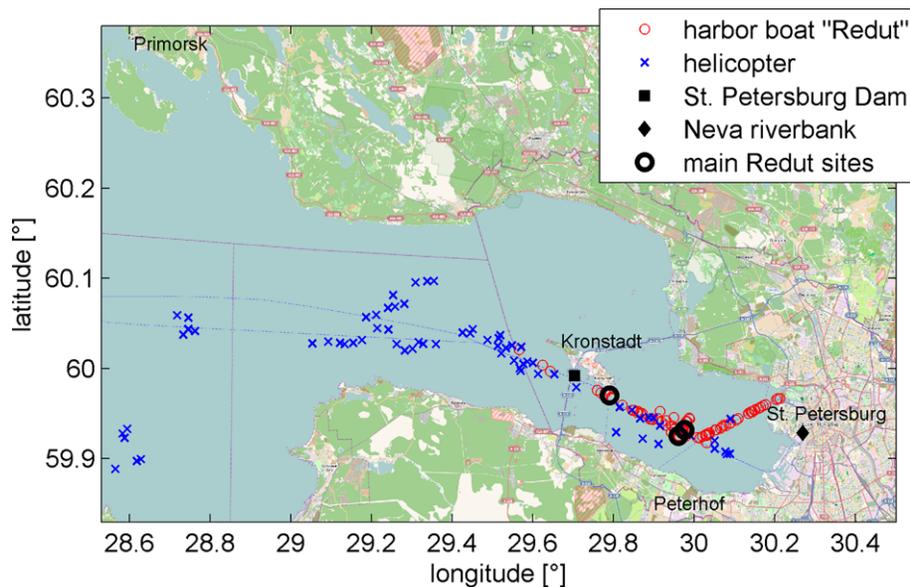


Figure 2. Map overview of the measurement sites. Most of the measurements from the harbor boat “Redut” were performed from the main Redut sites. Some during the passage between these sites and the port. (Map data © OpenStreetMap)

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)



Figure 3. Top: work vessel “Redut” with sample inlets (Picture of Redut taken by M. Pingoud). Bottom: Mi-8 helicopter with sample inlet.

Emission factors of
SO₂, NO_x and
particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



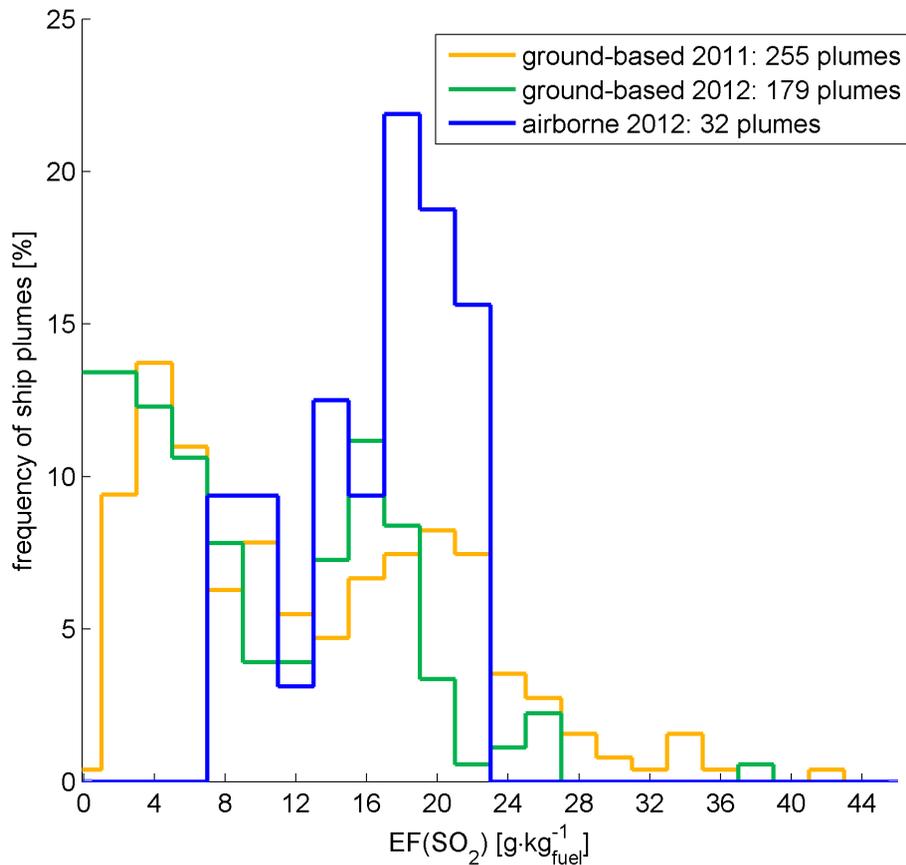


Figure 4. The frequency distribution of the measured emission factors of SO₂. Two main modes can be identified for the ground-based measurements; one for small SO₂ emission factors below and around 4 g_{SO₂} kg_{fuel}⁻¹ and the other one for 20 g_{SO₂} kg_{fuel}⁻¹ in 2011 respectively 16 g_{SO₂} kg_{fuel}⁻¹.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Emission factors of
SO₂, NO_x and
particles from ships

J. Beecken et al.

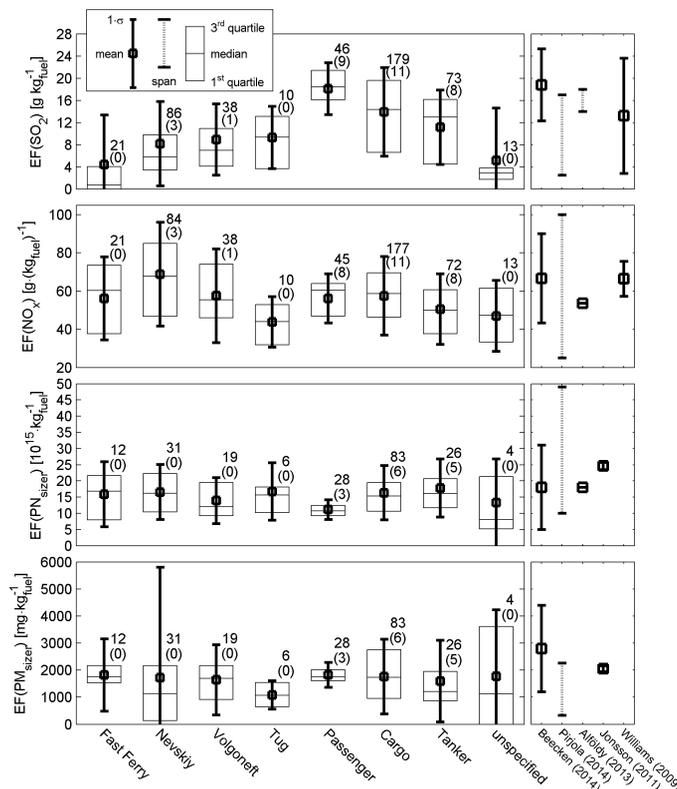


Figure 5. SO₂, NO_x and particle emission factors over different ship types and comparison to results from literature. The number close to the boxes denotes the number of sampled plumes from this ship type, numbers in brackets the fraction of plumes that were measured from the helicopter. Ships of type Nevskiy, Volgoneft and Fast Ferry are shown separately from their main groups.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



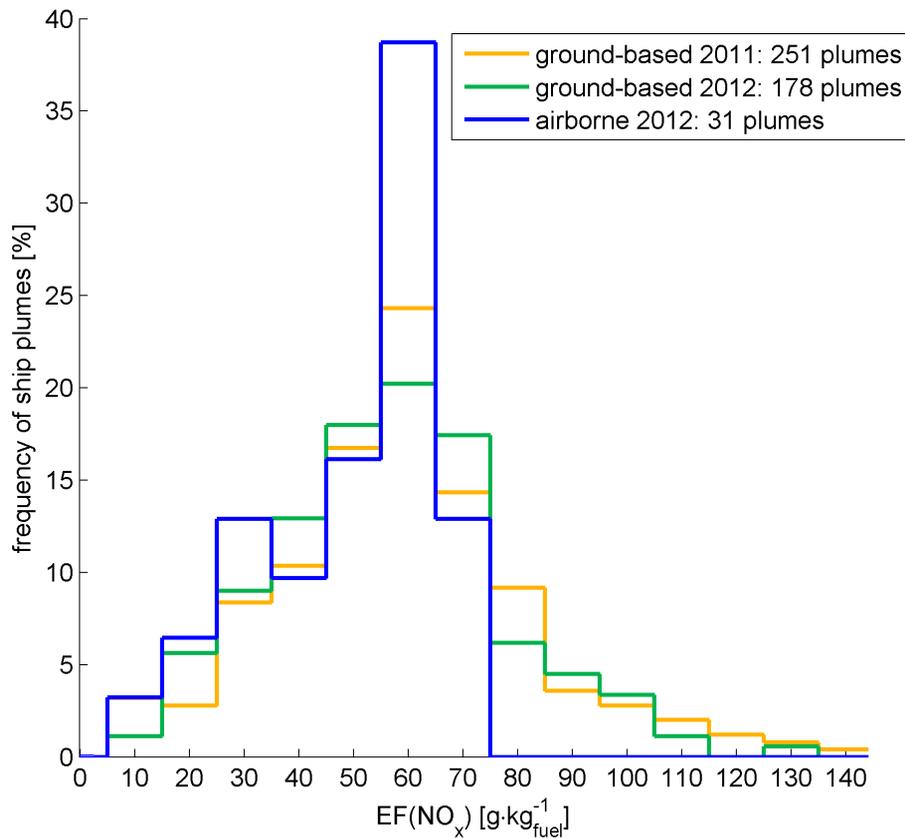


Figure 6. The frequency distribution of the measured emission factors of NO_x. It can be seen that there is a distinct peak around 60 g_{NO_x} kg_{fuel}⁻¹ which can be seen for all campaigns. For helicopter-borne measurements, no samples were seen with NO_x emission factors above 75 g_{NO_x} kg_{fuel}⁻¹.

Emission factors of SO₂, NO_x and particles from ships

J. Beecken et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



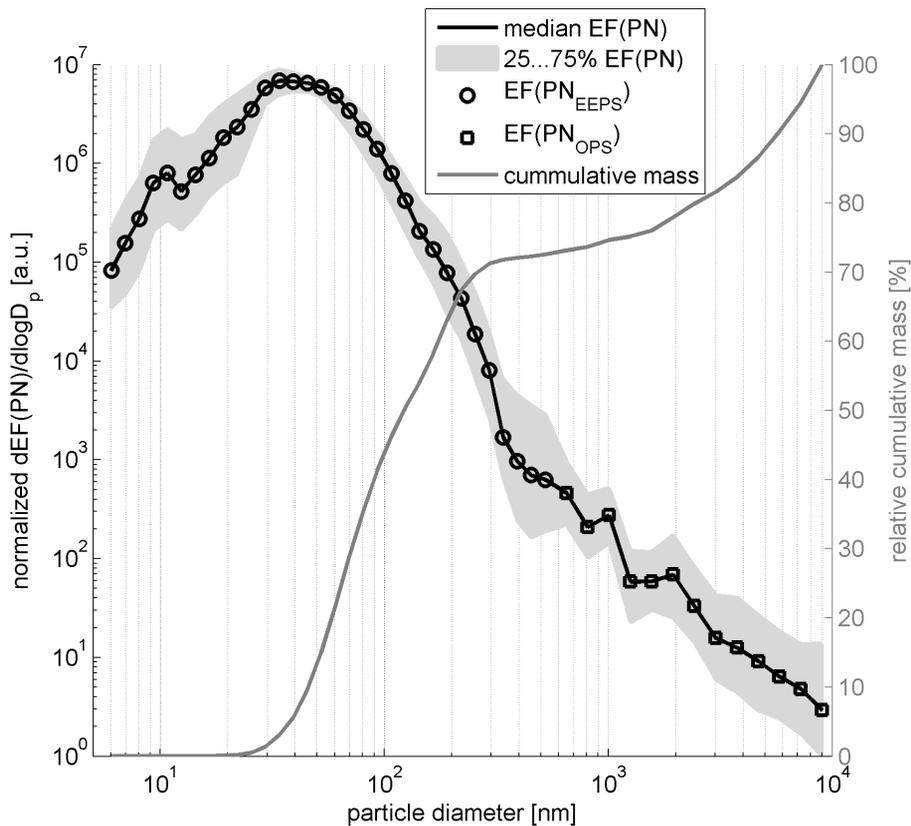


Figure 7. Averaged normalized size distribution of the EF(PN) and the cumulative sum of the median EF(PM) distribution over particle size. Around 77 % of the particles in the range 5.6 nm to 10 μ m were found to be between 7 and 65 nm in size. Around 70 % of the EF(PM) is from particles below 300 nm.

**Emission factors of
SO₂, NO_x and
particles from ships**

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Emission factors of
SO₂, NO_x and
particles from ships

J. Beecken et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

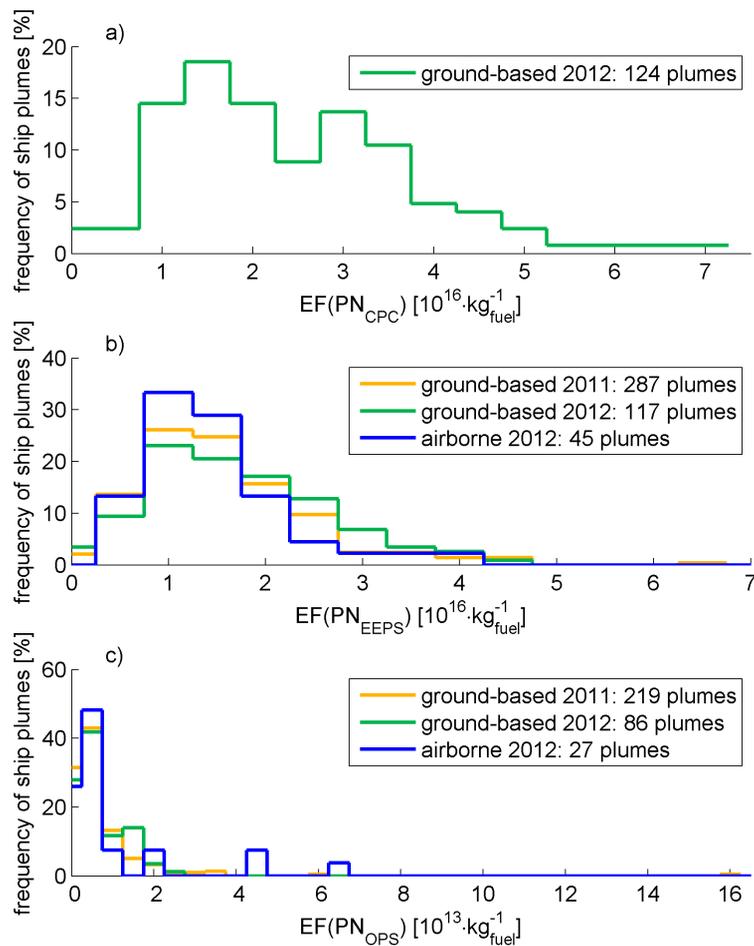


Figure 8. Frequency distribution of emission factors for particle number shown for **(a)**: CPC (> 5 μm), **(b)**: EEPS (5.6 to 560 nm) and **(c)**: OPS (0.3 to 10 μm).

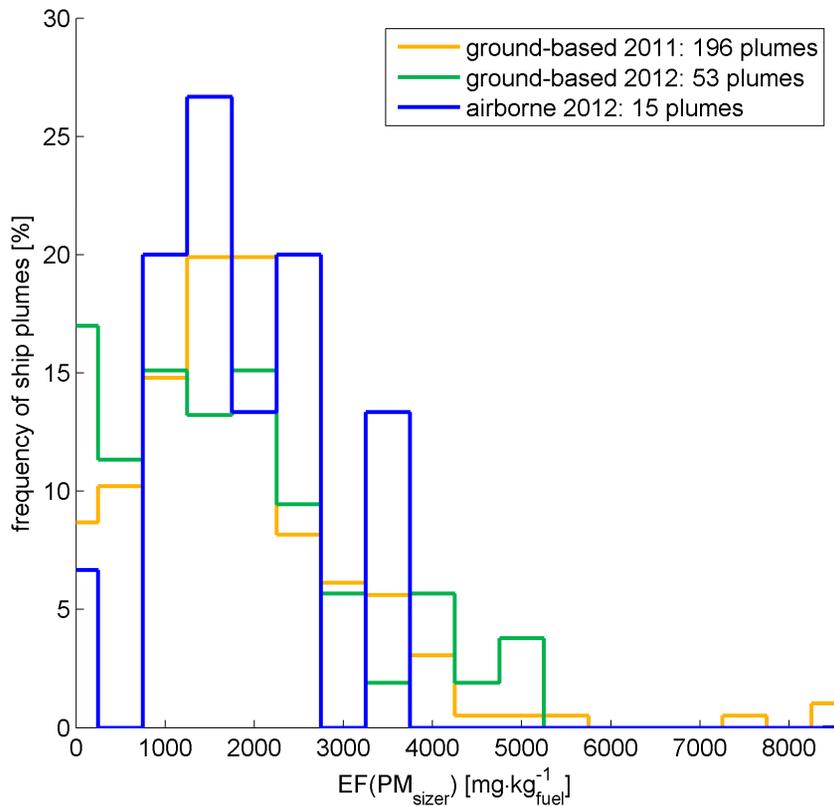


Figure 9. Frequency distribution of emission factors for particle mass. The data bases on the particle sizer measurements from the EEPS and the OPS. The size distribution of the OPS was truncated for size channels below 560 nm i.e. the upper size limit of the EEPS. Since no more data is available at this stage, the particles are assumed to be of spherical shape with a density of 1 g cm^{-3} .

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Emission factors of
SO₂, NO_x and
particles from ships

J. Beecken et al.

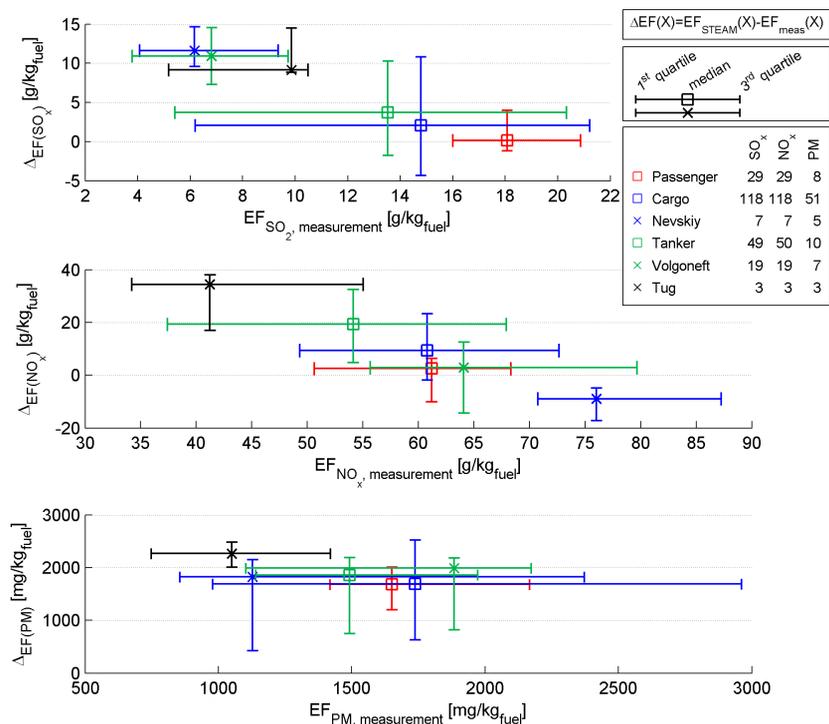


Figure 10. Comparison between modeled data by STEAM and measured data. The differences of the emission factors are shown group wise for individual ships at same speed. Thus it is shown in the graphs by how much the STEAM model statistically exceeds the measured data. It should be considered that the modeled SO_x was compared to the measured SO₂. Furthermore, the sum of the modeled emissions of OC, EC, ash, SO₄ are compared to the measured size distributed data between 5.6 nm and 10 μm under the assumption of a particle density of 1 g cm⁻³. The number of the compared plumes for each type and species is presented by the number values in the legend.