

This discussion paper is/has been under review for the journal Atmospheric Chemistry and Physics (ACP). Please refer to the corresponding final paper in ACP if available.

# High-resolution inventory of technologies, activities, and emissions of coal-fired power plants in China from 1990 to 2010

F. Liu<sup>1</sup>, Q. Zhang<sup>2</sup>, D. Tong<sup>2,1</sup>, B. Zheng<sup>1</sup>, M. Li<sup>2,1</sup>, H. Huo<sup>3</sup>, and K. B. He<sup>1</sup>

<sup>1</sup>State Key Joint Laboratory of Environment Simulation and Pollution Control,  
School of Environment, Tsinghua University, Beijing, China

<sup>2</sup>Ministry of Education Key Laboratory for Earth System Modeling,  
Center for Earth System Science, Tsinghua University, Beijing, China

<sup>3</sup>Institute of Energy, Environment and Economy, Tsinghua University, Beijing, China

Received: 02 May 2015 – Accepted: 03 June 2015 – Published: 09 July 2015

Correspondence to: Q. Zhang (qiangzhang@tsinghua.edu.cn)

Published by Copernicus Publications on behalf of the European Geosciences Union.

ACPD

15, 18787–18837, 2015

High-resolution  
power plant emission  
inventory for China

F. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Abstract

This paper, which focuses on emissions from China's coal-fired power plants during 1990–2010, is the second in a series of papers that aims to develop high-resolution emission inventory for China. This is the first time that emissions from China's coal-fired power plants were estimated at unit level for a 20 year period. This inventory is constructed from a unit-based database compiled in this study, named the China coal-fired Power plant Emissions Database (CPED), which includes detailed information on the technologies, activity data, operation situation, emission factors, and locations of individual units and supplements with aggregated data where unit-based information is not available. Between 1990 and 2010, compared to a 479 % growth in coal consumption, emissions from China's coal-fired power plants increased by 56, 335 and 442 % for  $\text{SO}_2$ ,  $\text{NO}_x$  and  $\text{CO}_2$ , respectively, and decreased by 23 % for  $\text{PM}_{2.5}$ . Driven by the accelerated economy growth, large power plants were constructed throughout the country after 2000, resulting in dramatic growth in emissions. Growth trend of emissions has been effectively curbed since 2005 due to strengthened emission control measures including the installation of flue-gas desulfurization (FGD) systems and the optimization of the generation fleet mix by promoting large units and decommissioning small ones. Compared to previous emission inventories, CPED significantly improved the spatial resolution and temporal profile of power plant emission inventory in China by extensive use of underlying data at unit level. The new inventory developed in this study will enable a close examination for temporal and spatial variations of power plant emissions in China and will help to improve the performances of chemical transport models by providing more accurate emission data.

## 1 Introduction

Bottom-up emission inventories, which are compiled from activity rates and emission factors, provide crucial information for understanding the variability of atmospheric

ACPD

15, 18787–18837, 2015

## High-resolution power plant emission inventory for China

F. Liu et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



compositions and for regulating climate and air quality policies. However, the current understanding of anthropogenic emissions in China is insufficient because of a lack of detailed underlying data (Zhao et al., 2011). This paper is the second in a series that aims to reduce these uncertainties and to improve the spatial and temporal resolution of bottom-up emission inventories in China. The first paper developed a high-resolution emission map for on-road vehicles (Zheng et al., 2014), and this paper focuses on coal-fired power plants.

Power plants consumed approximately half of the total coal production in China over the past decade (China Energy Statistical Yearbook, National Bureau of Statistics (NBS), 1992–2011) and contributed significantly to the total national emissions of greenhouse gases and air pollutants (32 % of CO<sub>2</sub>, 33 % of SO<sub>2</sub>, 33 % of NO<sub>x</sub>, and 6 % of PM<sub>2.5</sub> in 2010). Therefore, developing a coal-fired power plant emission inventory with high spatial and temporal resolution can significantly improve the accuracy of the anthropogenic emission inventory in China. In the meanwhile, because the power plant sector plays a key role in energy and environmental policies, a well-developed power plant database with accurate energy consumption and emission data could help to guide future policies and evaluate the dynamic changes in emissions induced by those policies.

As one of the major anthropogenic emitting sources, coal-fired power plant emissions in China have been estimated in many national, regional, and global inventories. Early studies (Kato and Akimoto, 1992; Klimont et al., 2001; Hao et al., 2002; Ohara et al., 2007) used yearly activity data with fixed emission factors to estimate emissions, which ignored the fact that the net emission rates were changing rapidly with the emergence of new technologies into the market. In recent studies, technology-based methodologies and locally measured emission factors were used to represent the dynamic changes in emissions, which improved the estimates of the magnitudes of and trends in power plant emissions throughout China (e.g., Zhang et al., 2007; Q. Zhang et al., 2009; Klimont et al., 2009, 2013; Lei et al., 2011; Tian et al., 2013; Y. Zhao et al., 2013).

## High-resolution power plant emission inventory for China

F. Liu et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



**High-resolution  
power plant emission  
inventory for China**

F. Liu et al.

In addition to the accuracy of the magnitudes, accurate information for each generation unit (i.e., location, emission) is also critical for a power plant inventory because power plant emissions are typically large, and improper treatment may lead to significant bias in the spatial distribution of emissions. Owing to the difficulties in acquiring information for all of the power plants in China, many bottom-up inventories only identified emissions from large power plants and allocated them according to their latitude and longitude coordinates, whereas emissions from other small units were distributed as area sources (e.g., Streets et al., 2003; Ohara et al., 2007; Q. Zhang et al., 2009; Lu et al., 2011). For the first time, Zhao et al. (2008) used unit-level coal consumptions to calculate emissions of individual electric generation units for the years of 2000 and 2005 and assigned them to each location. Subsequent studies developed unit-based power plant emission inventories for  $\text{NO}_x$  for the period of 2005–2007 (Wang et al., 2012) and for  $\text{SO}_2$ ,  $\text{NO}_x$ , particulate matter and  $\text{PM}_{2.5}$  for 2011 (Chen et al., 2014). The Carbon Monitoring for Action (CARMA) database (Wheeler and Ummel, 2008), a global power plant database at the factory level, has been widely used in bottom-up emission inventories to allocate power plant emissions (EC-JRC/PBL, 2011; Oda and Maksyutov, 2011; Kurokawa et al., 2013; Wang et al., 2013). However, the accuracy of the emission strengths and locations in the CARMA database is questionable given that it is not a scientific-level dataset that has undergone critical evaluation (Oda and Maksyutov, 2011; Gurney, 2012).

There are two major deficiencies in the current power plant inventories throughout China for revealing emissions at the unit level. First, owing to the lack of detailed information at the unit level, emissions from each plant are generally divided by the provincial totals according to capacity (e.g., Q. Zhang et al., 2009; Lu et al., 2011), which ignores the differences in the emission rates among units introduced by different technologies. Second, in a rapidly developing country such as China, emission factors for a given power plant may change over time as new combustion or emission control technologies are applied following the implementation of new emission stan-

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

## High-resolution power plant emission inventory for China

F. Liu et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



dards. Therefore, these time-dependent parameters should be included dynamically when constructing an accurate emission trend for the power plants in China.

The purpose of this study was to develop a high-resolution inventory of the technologies, activity rates, and emissions of coal-fired power plants in China for the period of 1990–2010 using extensive underlying data at the unit level, supplemented with aggregated data where unit-based information is not available. This is the first time that coal-fired power plant emissions in China were estimated for each unit from the bottom-up for a two-decade period. We construct a unit-based database, called the China coal-fired power plant emissions database (CPED), by collecting information regarding the technologies, activity data, emission factors, and locations of individual electricity generating units. To improve the accuracy of the emission estimates at the unit level, the database developed in this study includes not only the type and removal efficiency of emission control equipment for each unit but also the operating conditions of the equipment (i.e., when the equipment was commissioned).

Based on the unit-specific parameters from the CPED (e.g., unit capacity, boiler type, operation and phasing-out procedures, the sulfur content and ash content of coal, the type of emission control equipment and the time at which the equipment was commissioned, along with its removal efficiency), the SO<sub>2</sub>, NO<sub>x</sub>, fine particulate matter (PM<sub>2.5</sub>) and CO<sub>2</sub> emissions were estimated on a monthly basis for each coal-fired power generation unit over the period of 1990–2010.

## 2 Unit-based methodology and data

The CPED database developed in this study consists of over 7600 coal-fired electric generating units in mainland China, including ~5700 units in use in 2010 and ~1900 units retired since 2005. The SO<sub>2</sub>, NO<sub>x</sub>, PM<sub>2.5</sub> and CO<sub>2</sub> emissions from a specific unit in a given month from 1990 to 2010 were estimated using the following equation:

$$\text{Emis}_{s,y,m} = U \times P \times (H_0/H_y) \times T_y \times f_{m,y} \times \text{EF}_{s,k,y} \times \prod_n (1 - (\eta_{n,s} \times \tau_{n,m,y})), \quad (1)$$

where  $s$  represents the emission species,  $k$  represents the boiler type,  $n$  represents the emission abatement technology type,  $y$  represents the year, and  $m$  represents the month.  $U$  is the unit capacity, in MW,  $P$  is the coal consumption rate presented in grams coal equivalent per kWh supplied ( $\text{gce kWh}^{-1}$ ),  $H$  is the heating value of coal used for each unit in  $\text{kJ g}^{-1}$ ,  $H_0$  is the heating value of standard coal, which is  $29.27 \text{ kJ gce}^{-1}$ , and the ratio of  $H_0$  to  $H$  converts the coal equivalent (gce) to the physical quantity of coal (gram).  $T$  is the annual operation in hours, the product of  $U$  and  $T$  is the annual electricity generation,  $f$  is the monthly fraction of annual electricity generation, and EF is the unabated emission factor, in  $\text{g kg-coal}^{-1}$ . The parameter  $\eta$  is the removal efficiency of the abatement equipment, and  $\tau$  is the state factor for the abatement equipment;  $\tau = 1$  when the equipment is present and running, otherwise  $\tau = 0$ .

## 2.1 Activity rates

Detailed activity data are available for each generation unit for the period of 2005–2010 from China's Ministry of Environmental Protection (MEP; unpublished data, referred to hereafter as MEP-database). We used the MEP-database as the basis of deriving the activity rates for each unit for the period of 1990–2010 from a combination of different datasets. The capacity ( $U$ ) and operational status (when the unit was commissioned/decommissioned) for each unit were collected from the MEP-database and the National Development and Reform Commission (NDRC, 2013). The annual coal use and power generation of each unit from 2005 to 2010 were also obtained from the MEP-database and were used to calculate the coal consumption rate ( $P$ ) for each unit. The details about the generation unit fleet mix according to capacity size and efficiency are presented in Sect. 3.1.

The heating value of the coal ( $H$ ) used for each unit in 2010 was obtained from the MEP-database. In other years for which the unit-level data are not available, the average heating values of the coal used in power plants were derived by year and by province from the energy statistics (NBS, 1992–2011) and were then adopted to scale the 2010 value of each unit to the corresponding years. The heating values of coal

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



decreased remarkably since 2007 (from 20.0 kJ g-coal<sup>-1</sup> in 2007 to 18.8 kJ g-coal<sup>-1</sup> in 2010 as the national average), indicating the downgraded coal quality in the power sector due to a shortage of coal induced by a surge of electricity demand in recent years (Liu 2007; Shen and Song, 2010).

The annual operating hours ( $T$ ) for each unit from 2005–2010 were obtained from the MEP-database. In other years for which the unit-based data are not available, operating hours were scaled from the 2005 data according to the ratio of the provincial average operating hours in 2005 and the corresponding year. The provincial average operating hours before 2005 were estimated from the provincial total coal consumptions (NBS, 1992–2011) and the product of the corresponding unit capacity and the coal consumption rate obtained from our database. For 2003–2010, the monthly fractions of the annual electricity generation by province were derived from the statistics (NBS, 2013) and were applied to the units with adjustments if the unit was commissioned or decommissioned within that year. For the years prior to 2003, a monthly climatological profile of the 2003–2007 average was used. Coordinates of each unit (latitude and longitude) were obtained from the MEP-dataset and then individually validated using Google Earth to ensure that the accurate locations are presented in the CPED.

## 2.2 Emission factors

### 2.2.1 SO<sub>2</sub>

The unabated SO<sub>2</sub> emission factors for a specific unit were estimated via the sulfur mass balance approach using the following equation:

$$EF_{SO_2,y} = 2 \times SCC_y \times (1 - Sr) \quad (2)$$

where  $y$  represents the year, EF<sub>SO<sub>2</sub></sub> is the unabated SO<sub>2</sub> emission factor in g kg<sup>-1</sup>, SCC is the sulfur content of coal, and Sr is the fraction of sulfur retention in ash.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[|◀](#)[▶|](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

The SCC for each unit from 2005–2010 was obtained from the MEP-database. The SCC ranges widely with a mean value of 0.95 %. The SCC in the northeast power plants is lowest, whereas the SCC in the central and south power plants is significantly higher than that of plants in other regions, reflecting the different sulfur content in coal production in the various regions (Tang, et al., 2008). For the years before 2005, the SCC for each unit was scaled from 2005 data using the ratio of the provincial average SCC in 2005 and the corresponding year. The provincial average SCC before 2005 was calculated from the sulfur contents of coal production in each province using the coal transportation matrix approach (Zhang et al., 2012). The sulfur retention ratio was assumed to be 15 % for all of the units (Q. Zhang et al., 2009; Lu et al., 2010) because of the lack of unit-specific data.

Flue-gas desulfurization (FGD) systems have been widely installed in coal-fired power plants in China since 2005. This is the most important step for the emission reduction plan to reduce national SO<sub>2</sub> emissions by 10 % during the 11th five-year period (2005–2010). In this study, the operating conditions of FGD for each unit were obtained from the MEP-database. The actual SO<sub>2</sub> removal efficiencies for each unit in 2010 were also obtained from the MEP-database and were applied to every year because no data are available for the other years. The coal-consumption weighted mean SO<sub>2</sub> removal efficiency of all FGD facilities in 2010 is 78 %. Surveys and satellite observations confirmed that some of the early installed FGD facilities were not actually in operation prior to 2008 as the factories reported (Xu et al., 2009; Li et al., 2010; Xu, 2011), implying that our assumption may underestimate the SO<sub>2</sub> emissions from 2005 to 2007 for some units. SO<sub>2</sub> emissions can also be removed from wet scrubbers as a co-benefit of particulate matter removal. In this study, we assumed that the removal efficiency of wet scrubbers for SO<sub>2</sub> is 20 % (Yao, 1989; Xie, 1995).

## 2.2.2 NO<sub>x</sub>

NO<sub>x</sub> emission rates from coal-fired power plants vary significantly by boiler size, combustion technology, and coal type. In this study, we classified the units into three cate-

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	



High-resolution  
power plant emission  
inventory for China

F. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



gories by size: large units ( $\geq 300$  MW), medium units ( $\geq 100$  and  $< 300$  MW), and small units ( $< 100$  MW). We also classified the units into three categories by combustion technology (traditional low- $\text{NO}_x$  burner technology (traditional LNB), advanced LNB, and without LNB (Non-LNB)) and into two categories by coal type (bituminous and anthracite). Table 1 summarizes the measured  $\text{NO}_x$  emission factors in China's coal-fired power plants from each category.

Selective catalytic reduction (SCR) and selective noncatalytic reduction (SNCR) are two major de- $\text{NO}_x$  technologies used in coal-fired power plants. In 2010, 194 coal-fired electric generation units (13 % of the national total capacity) with a total capacity of 84 GW were equipped with SCR or SNCR. However, the actual operating conditions of the installed de- $\text{NO}_x$  devices are questionable due to the lack of inspections by local environmental protection bureaus before 2010. Our recent study also found that satellite-recorded tropospheric  $\text{NO}_2$  columns around the power plants with de- $\text{NO}_x$  devices were stable before 2010, indicating the poor operating conditions of these devices (Wang et al., 2015). In this study, we assumed that the de- $\text{NO}_x$  devices were not in operation until 2010 by setting the state factor in Eq. (1) to zero.

Prior to 2010, LNB technology was the only widely used technology in China's power plants to reduce  $\text{NO}_x$  emissions. Beginning in 1997, the use of LNB technologies in China's power plants increased, following the strengthened emission standards for thermal power plants (State Environmental Protection Administration of China (SEPA), 1996, 2003) in China. Since approximately 2005, newly established large generation units have been widely equipped with advanced LNB technologies, i.e., the stereo-staged combustion technology (X. Zhang et al., 2009) and the so-called "double-scale" combustion technology, which can significantly reduce the emission rates of  $\text{NO}_x$ . Recent measurements of China's coal-fired power plants confirmed that  $\text{NO}_x$  emission rates from large units with advanced LNB technologies are remarkably lower than units with traditional LNB technologies (e.g., Zhu et al., 2009; Zhu, 2011; Cao and Liu, 2011; see Table 1).

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	

Based on the discussion above, we assigned the appropriate LNB technology to each generation unit according to the following assumptions, given that the LNB information was absent from the MEP-database: (1) all large units constructed before 2006 are equipped with traditional LNB, and units constructed after 2006 are equipped with advanced LNB; (2) medium units constructed after 1997 are equipped with traditional LNB to meet the emission standards (SEPA, 1996), whereas units constructed before 1997 are not equipped with LNB; and (3) no small units are equipped with LNB during the study period. We then used the emission factors presented in Table 1 to calculate the  $\text{NO}_x$  emissions for each unit.

### 2.2.3 $\text{PM}_{2.5}$

The unabated emission factor of  $\text{PM}_{2.5}$  was calculated using the following equation:

$$\text{EF}_k = \text{AC} \times (1 - \text{ar}_k) \times f_k, \quad (3)$$

where  $k$  represents the boiler type, EF is the emission factor of  $\text{PM}_{2.5}$ , AC is the ash content of coal, ar is the mass fraction of retention ash, and  $f_k$  is the mass fraction of  $\text{PM}_{2.5}$  to the total particulate matter in fly ash.

When calculating  $\text{PM}_{2.5}$  emissions, coal-fired generation units are classified into three boiler types: pulverized coal boilers, circulating fluidized beds, and grate furnaces. The boiler type information for each unit was obtained from the MEP-database. For each boiler type, the fraction of retention ash was derived from the Greenhouse Gas and Air Pollution Interactions and Synergies (GAINS) database (Klimont, et al., 2002; Amann et al., 2011), with values of 20, 44 and 85 % for pulverized coal boilers, circulating fluidized beds, and grate furnaces, respectively. The mass fraction of  $\text{PM}_{2.5}$  to total particulate matter in fly ash was derived from the GAINS (Klimont, et al., 2002; Amann et al., 2011) and local databases (Zhao et al., 2010), as presented in Table 2. The ash content of coal for each unit in 2010 was obtained from the MEP-database and was applied to every year.



<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	



The four types of technologies used in power plants to remove particulate matter are cyclones, wet scrubbers, electrostatic precipitators, and bag filters. The technology type for each unit was obtained from the MEP-database. The removal efficiencies of each technology were obtained from our previous study (Lei et al., 2011) and are shown in Table 3. Particulate matter can also be removed via wet FGD as a co-benefit of SO<sub>2</sub> removal. In this study, we assume the same PM<sub>2.5</sub> removal efficiency for wet FGD equipment as that for wet scrubbers (Zhao et al., 2010).

## 2.2.4 CO<sub>2</sub>

The emission factor for CO<sub>2</sub> was calculated using guidelines from the Intergovernmental Panel on Climate Change (IPCC, 2006), as follows:

$$EF_{CO_2,y} = A \times O \times 44/12 \times H_y, \quad (4)$$

where  $y$  is the year, EF<sub>CO<sub>2</sub></sub> is the CO<sub>2</sub> emission factor in g kg<sup>-1</sup>,  $A$  is the carbon content in kg-C GJ<sup>-1</sup>,  $O$  is the oxidization rate, and  $H$  is the heating value in kJ g-coal<sup>-1</sup>. In this study, we used 25.8 and 26.7 kg-C GJ<sup>-1</sup> for the carbon contents of bituminous and anthracite coal, respectively, and 100 % for the oxidization rate; these values were obtained from the IPCC guidelines (IPCC, 2006). The data source of the coal heating value is presented in Sect. 2.1.

## 2.3 Uncertainty analysis

An uncertainty analysis was performed for our estimates using a Monte Carlo approach. The term “uncertainty” in this study refers to the lower and upper bounds of a 95 % confidence interval (CI) around a central estimate. The Monte Carlo simulation uses specified probability distributions for each input parameter (e.g., activity data, emission factors) to generate random variables. The probability distribution of emissions is estimated according to a set of runs (10 000 runs in this study) in a Monte

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	



Carlo framework with probability distributions of the input parameters (Lu et al., 2011; Zhao et al., 2011). Table S1 in the Supplement summarizes the probability distributions of all of the input parameters used to estimate the uncertainties of the national total emission estimates. For parameters with adequately measured data (e.g., NO<sub>x</sub> emission factors), distribution functions were fitted from the distributions of those data. Probability distributions of other parameters were obtained from previous studies (Zhao et al., 2010, 2011; Lu et al., 2011) or were based on our own discretion.

Uncertainties associated with emission estimates could vary with time. The uncertainties for a unit in 1990 can be considered larger than the uncertainties in 2010, for which all of the specific information is available in the CPED. In this study, we also calculated the emission uncertainties of one selected generation unit for 2000 and 2010 to demonstrate the uncertainties at the unit level. The probability distributions of the unit-level parameters are presented in Table S2 in the Supplement. In contrast to uncertainty analyses for national total emissions, we used discrete distributions (i.e., “Yes/No” distributions) to represent the probability distributions of the technologies, which represent situations in which our assumptions about the technology for a specific unit are correct/incorrect.

### 3 Results

#### 3.1 Evolution of technologies in coal-fired power plants

The energy efficiency of power plants in China has improved significantly over the past two decades. As shown in Fig. 1, the average coal consumption per unit electricity supplied decreased from 407 gce kWh<sup>-1</sup> in 1990 to 327 gce kWh<sup>-1</sup> in 2010, representing an improvement of 20 % in energy efficiency over 20 years. This significant change could be attributed to the measures imposed by the Chinese government to encourage large-scale power units and to decommission small units. Figure 1 also presents the variation trend in the share of units of different sizes from 1990 to 2010. The share

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



such as supercritical and ultra-supercritical. From 2005 to 2010, with the increase in the number of large units, the average coal consumption rate decreased from 356 to 327 gce kWh<sup>-1</sup>, representing an 8 % total efficiency improvement from 2005–2010.

### 3.2 Inter-annual emissions

- 5 Figure 4 and Table 4 summarizes the emissions of each species from China's coal-fired power plants during 1990–2010. The total coal consumptions in China's coal-fired power plants increased significantly by 479 % in China from 1990 to 2010, whereas SO<sub>2</sub> emissions from the power plants increased by 56 %, NO<sub>x</sub> emissions increased by 335 %, CO<sub>2</sub> emissions increased by 442 %, and PM<sub>2.5</sub> emissions decreased by 23 %
- 10 during the same period, indicating that significant technological changes occurred in the power sector. Table 4 also presents the variation in technology penetration rates and emission factors of coal-fired power plants from 1990 to 2010.

#### 3.2.1 SO<sub>2</sub>

- Figure 4 shows the SO<sub>2</sub> emissions from power plants estimated in this study. From 15 1990 to 2005, SO<sub>2</sub> emissions increased at an annual rate of 8 %, driven by the ever-increasing demand for electricity, at a growth rate of 10 %. The improved energy efficiency and co-benefit of wet scrubbers on SO<sub>2</sub> removal slightly mitigated the emission growth trend. In 2005, to control emissions, China began to require the installation of FGD in power plants (Table 4). Therefore, the SO<sub>2</sub> emissions peaked at 16.7 Tg in 20 2006 and began to decrease sharply. By 2010, 84 % of the total unit capacity in our database was equipped with FGD, which was estimated to reduce SO<sub>2</sub> emissions to 7.7 Tg, 54 % lower than the 2006 emission level.

- 25 Figure 5 presents the FGD installation process. As shown in Fig. 5, in 2006, FGD was primarily installed for new units, and the share of unit capacity installed with FGD was 69 % for new units, whereas it was only 15 % for those over 10 years old. Influenced by the premium price for desulfurized electricity and the penalties incurred for non-

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



desulfurized electricity since 2007 (Xu et al., 2009), the deployment of FGD sharply increased for new and aged units. As Fig. 5 shows, there was no difference in the FGD installation ratio between new and aged units younger than 20 years old in 2010, and the share of the unit capacity with FGD reached 63 % for units over 10 years old.

However, the SO<sub>2</sub> removal efficiencies vary among the different units. As presented in Fig. 6, FGD equipped on larger units exhibited better SO<sub>2</sub> removal efficiencies than that on small units. In 2010, the average SO<sub>2</sub> removal efficiencies were approximately 80 % for large units but only 60 % for small units. Figure 7 presents the cumulative ratio of SO<sub>2</sub> emissions by unit size for 2005 and 2010. The cumulative ratio of the unit capacity was comparable to that of the SO<sub>2</sub> emissions in 2005 (Fig. 7a), but they differed significantly in 2010 (Fig. 7b). The capacity share of small units decreased from 20 % in 2005 to 9 % in 2010, but the contribution to the total SO<sub>2</sub> emissions remained unchanged at ~ 20 %. Before 2005, the emission contribution to SO<sub>2</sub> of a power unit was largely dependent on its capacity because desulfurization devices were seldom employed at that time. Thus, the cumulative ratios of the unit capacity and SO<sub>2</sub> emissions could be similar. However, in 2010, 92 % of large units were equipped with FGD, which is considerably higher than the number of small units (52 %). In addition, large units tend to have higher SO<sub>2</sub> removal efficiencies. In 2010, large units contributed to 55 % of the total SO<sub>2</sub> emissions in 2010 while comprising 76 % of the total capacity.

### 3.2.2 NO<sub>x</sub>

As shown in Fig. 4, NO<sub>x</sub> emissions from power plants continued to increase from 1990 to 2010, except for the period of 2007–2009. NO<sub>x</sub> emissions from power plants increased by a factor of 3.4 from 1990 to 2010, from 1.9 Tg (all of the values herein are calculated as NO<sub>2</sub>) in 1990 to 8.3 Tg in 2010. This dramatic growth was largely driven by the increasing electricity demand and was partially offset by the installation of LNB. Our study suggests that the average NO<sub>x</sub> emission factor (in g kg<sup>-1</sup> of coal) slightly decreased at an annual rate of 1 % from 1990 to 2005 with increasing LNB penetrations (Table 4). From 1990 to 2005, NO<sub>x</sub> emissions increased at an annual growth rate

of 8.6 %, comparable to the 9.4 % annual growth rate of coal consumption during the same period. After 2005, the decreased rate of average  $\text{NO}_x$  emissions accelerated (at 3 % per year) because of the higher  $\text{NO}_x$  removal efficiencies of advanced LNB technologies compared with traditional LNB. From 2005 to 2010,  $\text{NO}_x$  emissions increased by 126 %, which is remarkably lower than the 150 % increase in coal consumption. Owing to the decline in emission factors and the reduction in electricity demand led by the global economic crisis,  $\text{NO}_x$  emissions decreased in 2008 and 2009 but increased again in 2010 at a growth rate of 9 % after recovery from the economic crisis.

### 3.2.3 $\text{PM}_{2.5}$

- 10  $\text{PM}_{2.5}$  emissions from power plants decreased from 1.08 Tg in 1990 to 0.83 Tg in 2010, with two fluctuating peaks occurring in 1996 and 2005, which were due to the combined effect of electricity demand and environmental regulations. Our estimates for the period of 1990–2005 are generally consistent with our previous estimates (Lei et al., 2011). The decline of emissions after the first peak was driven by the technology renewal progress following the implementation of the first emission standards for power plants 15 in 1996 (SEPA, 1996), and the deceleration of the Chinese economy.  $\text{PM}_{2.5}$  emissions rebounded after the 1998 financial crisis but decreased again after 2005, in compliance with the implementation of stricter emission standards for power plants (SEPA, 2003).  $\text{PM}_{2.5}$  emissions decreased by 40 % from 2005–2010, which may be due to the 20 following reasons. First, small units with poorly efficient  $\text{PM}_{2.5}$  emission control facilities were phased out from the unit fleet. Second, electrostatic precipitators and bag filters with high removal efficiencies were widely equipped in generation units under the requirement of the new emission standards. In addition, FGD installation further removed  $\text{PM}_{2.5}$  emissions from the end-pipe. Due to the combination of these three factors, the 25 average  $\text{PM}_{2.5}$  emission factors decreased by 60 % from 2005–2010, completely offsetting the effect of the 50 % increase in coal consumption.

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	



### 3.2.4 CO<sub>2</sub>

Of the examined species emitted from power plants, CO<sub>2</sub> emissions increased most rapidly from 1990 to 2010 because, in contrast to SO<sub>2</sub>, NO<sub>x</sub>, and PM<sub>2.5</sub>, no control measures were implemented to remove CO<sub>2</sub>. We estimated that China's coal-fired power plants emitted 2.8 Pg CO<sub>2</sub> in 2010, an increase of 442 % compared with emissions in 1990. The increase is in line with the 574 % growth in electricity generation (China Energy Statistical Yearbook, NBS, 1992–2011) but is slightly offset by the improved energy efficiency resulting from the spread of large and efficient units. Due to the improvement in energy efficiency, CO<sub>2</sub> emissions per unit of electricity supplied were reduced by 20 % from 1990 to 2010, which is a great achievement, although far from constraining the growth of CO<sub>2</sub> emissions.

## 3.3 Evaluation of major policies for emission mitigation

This section evaluates the effects of the major emission control measures on reducing SO<sub>2</sub>, NO<sub>x</sub>, PM<sub>2.5</sub> and CO<sub>2</sub> emissions during the 11th five-year period (2005–2010).

As described in Sect. 3.1, China primarily implemented two policies for power plants during this period, including the installation of FGD and the optimization of the mix of generation unit fleets by promoting large power plants and decommissioning small plants. We developed two hypothetical scenarios to evaluate the effects of these two policies on emission mitigation, as follows: (1) Scenario I: we assumed that China did not adjust its fleet mix, i.e., its distribution of capacity size. In this scenario, the amount of newly-built capacity is the same as the actual case, but the fleet mix was assumed unchanged during 2005 and 2010. (2) Scenario II: based on Scenario I, we further assumed that no new FGD installations were performed after 2005.

Figure 8 compares the emission differences between the hypothetical Scenarios I and II and the actual cases during 2005 and 2010. Restructuring the unit fleet resulted in coal savings by improving efficiency, which contributed to emission abatement for all of the species. In 2010, the restructuring aided in the reduction of 83.7 Tg of coal use,

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



4.3 Tg SO<sub>2</sub>, 1.8 Tg NO<sub>x</sub>, 0.4 Tg PM<sub>2.5</sub> and 238.6 Tg CO<sub>2</sub> emissions compared with the hypothetical Scenario I.

The differences between the hypothetical Scenario I and Scenario II represent the effects of FGD installations. As shown in Fig. 8, FGD installation was a significant contributor to emission mitigation of SO<sub>2</sub> and PM<sub>2.5</sub>. During the 6 year period from 2005 to 2010, FGD installation was estimated to reduce 51.6 Tg of cumulative SO<sub>2</sub> emissions or 36 % of the cumulative SO<sub>2</sub> emissions from power plants compared with the hypothetical Scenario II. In 2010, FGD installation prevented 16.3 Tg of SO<sub>2</sub> emissions, a value that is 2.1 times higher than the total actual emissions. In addition, FGD facilities aided in reducing PM<sub>2.5</sub> by 0.54 Tg in 2010, owing to the co-benefit of wet-FGD on particulate matter removal.

### 3.4 Spatial distribution of emissions

Table 5 summarizes the unit fleet mix by capacity size and technology penetration rates, as well as the emission factors of China's six large interprovincial power grids, which are named according to the regions they serve, as follows: Northeast China, North China, Central China, East China, Northwest China, and South China. A significant decrease in the emission factors of each of the four species can be observed for all of the power grids from 2005 to 2010, especially for SO<sub>2</sub> and PM<sub>2.5</sub>, which is consistent with the national trend. The emission factors are different among the grids due to their different mix of unit fleets, fuel qualities, and penetration of emission control technologies. Of the six grids, the east and central grids exhibited the lowest CO<sub>2</sub> emission factors in 2010, primarily due to their high percentage of large units in the generation mix (the capacity share of units larger than 300 MW was more than 75 % in 2010) and the higher combustion efficiency of large units. The variations of SO<sub>2</sub> emission factors among the grids represent the differences in FGD penetration and the sulfur content of coal. The SO<sub>2</sub> emission factors for the south and central grids are higher than the other grids due to the high sulfur content of coal. The FGD penetration rate of the northeast grid was significantly lower than that of the south grid in 2010 (60.1 % in the northeast

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



versus 92.7 % in the south). However, the northeast grids had a lower SO<sub>2</sub> emission factor (2.23 g kWh<sup>-1</sup> in the northeast versus 3.41 g kWh<sup>-1</sup> in the south) due to the differences in the sulfur content of coal between the two regions. The PM<sub>2.5</sub> emission factors varied remarkably due to the regional differences in the penetration rates of efficient PM<sub>2.5</sub> removal facilities (electrostatic precipitators and bag filters). In 2010, the average PM<sub>2.5</sub> emission factor in the northeast grid was more than two times higher than that of the east grid due to its lower penetration rates of electrostatic precipitators (89.0 % versus 96.2 %). Because an electrostatic precipitator has very high removal efficiency for PM<sub>2.5</sub> (93 %) compared with wet scrubbers (50 %) and cyclones (10 %), small differences in technology penetration among regions could result in significant disparities in the final emission factors.

Figure 9 depicts the yearly evolution of the SO<sub>2</sub> emissions from China's coal-fired power plants from 1990 to 2010 at the unit level (only eastern China is shown on the map). New power plants were constructed throughout the country after 2000. Particularly, large units were rapidly constructed in the north regions, where large coal mines are located, and along the eastern coastal regions, where economies are most active. In addition, SO<sub>2</sub> emissions from large units have declined significantly since 2005, and many small units were terminated. Figure 10 shows NO<sub>x</sub> emissions by unit for the years 1990, 2000, 2005, and 2010. In contrast to SO<sub>2</sub>, NO<sub>x</sub> emissions continuously increased over the entire study period given that no effective NO<sub>x</sub> emission control facilities (e.g., SCR) were operated after the generation units were commissioned.

### 3.5 Monthly variation of emissions

Figure 11 presents the monthly profiles of power generation, CO<sub>2</sub> emissions, and SO<sub>2</sub> emissions from 2005–2010, which were aggregated from the monthly profiles of each unit. Power generations and emissions typically peaked in December of each year due to high year-end industrial activities, with the exception of 2008 during the financial crisis. The second emission peak occurs in July and August, which is driven by the

High-resolution  
power plant emission  
inventory for China

F. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



electricity demand of air conditioners. The low point of emissions occurs in January or February of each year, depending on the time of the Spring Festival.

As shown in Fig. 11, monthly variations in CO<sub>2</sub> emissions generally follows the variation in power generation, whereas the monthly variation of SO<sub>2</sub> emissions differs from that of the power generation after 2007 when FGD installations were widespread. After 2007, the monthly fraction of SO<sub>2</sub> emissions was typically higher than the fraction of power generation during the first half of the year but reversed during the second half of the year, reflecting that many FGD facilities were installed by the year-end to meet the government requirements of that year. In this case, the monthly emission profiles developed in this study differ from previous inventories for which temporal variations in power plant emissions were derived from the monthly electricity generation of each province (e.g., Streets et al., 2003; Zhang et al., 2007).

## 4 Discussion

### 4.1 Uncertainty in emission estimates

The uncertainty ranges of emissions estimated in this study are presented in Fig. 12. The average uncertainties of emissions from coal-fired power plants in China in 2010 are estimated as –22 to 23 % for SO<sub>2</sub>, –15 to 15 % for NO<sub>x</sub>, –31 to 38 % for PM<sub>2.5</sub>, and –15 to 16 % for CO<sub>2</sub>. The higher uncertainty range of the PM<sub>2.5</sub> emission estimates is dominated by the uncertainties in the unabated emission factors and the efficiencies of PM<sub>2.5</sub> removal facilities. The development of a local database of the actual removal efficiencies for emission control in the future will help to reduce the uncertainties. The uncertainty ranges narrowed gradually from 1990 to 2010, representing the improved knowledge of the underlying data over time (e.g., –43 to 55 % for PM<sub>2.5</sub> in 1990 and –31 to 38 % in 2010). As discussed in Sect. 2, many of the input data in the CPED in 1990 were determined by extrapolations and assumptions that were associated with high uncertainty, whereas the uncertainty ranges for the 2010 emission estimates are

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



significantly reduced because of the extensive use of unit-specific data, such as coal quality and combustion technologies.

We further demonstrated how the emission uncertainties changed over time at the unit level. For the selected generation unit (600 MW, pulverized boiler, equipped with FGD, LNB, and an electrostatic precipitator), the uncertainty ranges of the emission estimates for 2000 and 2010 are presented in Table 6. The uncertainty ranges for the 2010 estimates are significantly reduced compared with the uncertainties for 2000 because more unit-specific information became available in 2010. For 2010, the uncertainties at the unit level are comparable with the national average, given that all of the available unit-specific input data correspond to low uncertainties. However, in 2000, the uncertainties at the unit level are significantly higher than the national average because several key parameters (e.g., annual operating hours, sulfur content and heating value of coal) were derived from extrapolations and assumptions.

## 4.2 Comparison with previous estimates of emission trends

- In this section, we compared our new inventory with other bottom-up emission inventories, as shown in Fig. 12, in which multi-year estimates are provided (more than five data points from 1990 to 2010). The discussion is focused on inventories that are available for multiple species and are widely used in the community, i.e., Emission Database for Global Atmospheric Research version 4.2 (EDGAR 4.2, EC-JRC/PBL, 2011) and Regional Emission inventory in Asia version 2 (REAS 2, Kurokawa et al., 2013). We initially compared the CO<sub>2</sub> emission estimates among the different emission inventories. Our estimate is consistent with Guan et al. (2012) but is approximately 16 %–25 % lower than the estimates by three other studies (EDGAR 4.2, REAS 2, and Y. Zhao et al., 2013). Our estimates are similar to those of Guan et al. (2012) because both estimates used a lower coal heating value (an average of ~20 kJ g<sup>-1</sup>) derived from energy statistics, which was approximately 20 % lower than the IPCC's recommended value (25.8 kJ g<sup>-1</sup>) used in other studies. The lower estimate in this study compared with

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	



## High-resolution power plant emission inventory for China

F. Liu et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



EDGAR 4.2 might also be because the public electricity and heat production sector in EDGAR 4.2 include emissions from heating plants.

For SO<sub>2</sub> emissions, EDGAR 4.2 and the official estimates by the MEP (China Statistical Yearbook, NBS, 1997–2011) exceed the boundary of the 95 % CI calculated in this study. EDGAR 4.2 estimated a positive trend until 2008, which differs from other studies, likely because EDGAR 4.2 failed to characterize the SO<sub>2</sub> emission control progress in China's power plants after 2005. Three other inventories (REAS 2, Lu et al., 2011, and this study) provided consistent trajectories for SO<sub>2</sub> emissions and are higher than the official estimates for the period of 1998 to 2008, likely due to underreported emissions by the MEP. All of the studies presented a similar growth trend for NO<sub>x</sub> emissions over the last two decades, whereas EDGAR 4.2 and REAS 2 are slightly higher than the upper bound of the 95 % CI calculated in this study. By revisiting the local emission factor measurements (Table 1), our new estimates for NO<sub>x</sub> emissions are 15 %–24 % lower than previous estimates (Zhang et al., 2007) for the period of 1995–2004. REAS 2 used emission factors from Zhang et al. (2007) and then derived higher emissions than those in this study (Kurokawa et al., 2013). REAS 2 concluded that NO<sub>x</sub> emissions from China's power plants increased by 136 % from 2000 to 2008, higher than the value of 125 % of growth estimated in this study during the same period due to different assumptions in the evolution of combustion technologies. The PM<sub>2.5</sub> emission trends presented in this study generally agree well with previous studies (Lei et al., 2011; Y. Zhao et al., 2013) but significantly differ from REAS 2. REAS 2 presented a 36 % increase in PM<sub>2.5</sub> emissions from 2005 to 2008, whereas we estimated a 24 % decrease during the same period, most likely due to different assumptions regarding the penetration of PM<sub>2.5</sub> removal devices.

### 4.3 Comparison with the CARMA database

The CARMA database (Wheeler and Ummel, 2008; Ummel, 2012) has been widely used to allocate power plant emissions in different global and regional emission inventories (e.g., EDGAR 4.2 and REAS 2). In this section, we compared the magnitude and

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	



Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and the reported emissions are within 20 % of the actual values for only 75 % of plants. For 46 power plants included in both CARMA and in CPED over the southwest region, the average distance between the locations reported in CARMA and in CPED is approximately 50 km, indicating that the CARMA database may be insufficient to support air quality modeling on regional and urban scales.

Figure 14 further presents the relative differences in the CO<sub>2</sub> emission flux (g m<sup>-2</sup>) at various spatial resolutions (0.1, 0.5, 1, and 2°) in 2009 for the two datasets. The degree of differences between the two datasets is highly correlated to the spatial resolution. The differences are diminished as the spatial resolution decreases. The average differences between the two datasets are within 10 % at a 2° resolution and 20–30 % at a 1° resolution, indicating that CARMA has an acceptable accuracy to support modeling studies at the global scale. However, at a 0.1° resolution, the relative differences between the two inventories are as high as 70 %, suggesting that CARMA is not appropriate for high-resolution modeling.

## 5 Concluding remarks

This is the first study to develop a unit-based inventory of technologies, activities, and emissions for China's coal-fired power plants for the period of 1990–2010. The CPED database developed in this study includes ~5700 in-use electricity generating units in 2010 and ~1900 retired units since 2005. From the high-resolution CPED database, spatial and temporal variations of China's power plant emissions were presented from 1990 to 2010. In 2010, SO<sub>2</sub>, NO<sub>x</sub>, PM<sub>2.5</sub> and CO<sub>2</sub> emissions from China's coal-fired power plants are estimated to be 7.7, 8.3, 0.83 Tg, and 2.8 Pg respectively. From 1990 to 2010, SO<sub>2</sub>, NO<sub>x</sub>, and CO<sub>2</sub> emissions from power plants increased by 56, 335, and 442 %, respectively, and PM<sub>2.5</sub> emissions decreased by 23 % during the same period. Energy efficiency of coal-fired power plants in China has been improved by approximately 20 % in 20 years owing to measures imposed by the Chinese government to encourage large-scale power units and to decommission small units.

The most significant changes in power plant emissions occurred during 2005–2010, driven by the dramatic economy growth and offset by the strengthened emission control measures. Large units were rapidly constructed in the north regions and eastern coastal regions to meet the high electricity demand, while growth trend of emissions has been effectively curbed since 2005 by installation of FGD and the optimization of the generation fleet mix. 84 % of the total unit capacities were equipped with FGD in 2010, which helped reducing SO<sub>2</sub> emissions to half of the 2006 emission level. The increasing penetration of advanced LNB after 2006 has reduced the average NO<sub>x</sub> emission factor by 16 %, but still did not constrain the growth of NO<sub>x</sub> emissions. New environmental regulations, including the phase-out of small units with inefficient PM<sub>2.5</sub> emission control facilities, the widespread use of electrostatic precipitators and bag filters, and FGD installations that has a co-benefit to PM<sub>2.5</sub> removal, have led to the 40 % decrease of PM<sub>2.5</sub> emissions from 2005 to 2010.

The new inventory developed in this work has several advantages against previous studies. First, to our best knowledge, it is the most complete coal-fired power plant database for China with inclusion of more than 7600 in-use and retired units, enabling more accurate emission estimates at unit level. Second, CPED has dynamic information for a given unit including commission/decommission time of units, changes in technologies, and operating condition of emission control facilities. The above information further improved the accuracy of emission estimates for every time step. Third, exact locations of each unit were obtained from MEP and crosschecked by Google Earth manually, which could benefit to chemical transport modelling at high spatial resolution.

Although we believe that the accuracy of CPED has been substantially improved, it still has some uncertainties. Emission estimates for 1990s are thought to be more uncertain than 2000s because a few parameters during 1990s were determined by extrapolations and assumptions rather than using unit-specific data. Units retired before 2005 were not included in our database. However, we believe that omitting those units would have minor impacts to the accuracy of CPED as large scale retirement of coal-fired power plants were only occurred after 2005. Local measurements for PM<sub>2.5</sub>

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	



emission factors are still rare compared to  $\text{SO}_2$  and  $\text{NO}_x$ , leading to higher uncertainties in  $\text{PM}_{2.5}$  emission estimates. In recent years, continuous emission monitoring systems (CEMS) were gradually equipped in electricity generating units, offering the opportunities of using real-time emission data. Applying CEMS data in the future will further improve the accuracy of emission estimates in CPED.

5  
The Supplement related to this article is available online at  
doi:10.5194/acpd-15-18787-2015-supplement.

Acknowledgements. This study was supported by China's National Basic Research Program (2014CB441301) and the National Natural Science Foundation of China (41222036, 41275026,  
10 and 71322304). Q. Zhang and K. B. He are supported by the Collaborative Innovation Center for Regional Environmental Quality. We would express special thanks to C. H. Chen, G. N. Geng, C. P. Hong, S. C. Kang, and S. W. Wang for crosschecking the locations of power plants.

## References

- Amann, M., Bertok, I., Borken-Kleefeld, J., Cofala, J., Heyes, C., Höglund-Isaksson, L., Klimont, Z., Nguyen, B., Posch, M., Rafaj, P., Sandler, R., Schöpp, W., Wagner, F., and Winiwarter, W.: Cost-effective control of air quality and greenhouse gases in Europe: Modeling and policy applications, *Environ. Modell. Softw.*, 26, 1489–1501, 2011.
- Bi, Y. and Chen, G.: Countermeasures and suggestions for controlling  $\text{NO}_x$  emission of utility boilers, *Electricity*, 15, 41–45, 2004 (in Chinese).
- Cao, D. and Liu, H.: Study on  $\text{NO}_x$  emission control technology of boilers, *Water Con. Elect. Power Mach.*, 33, 69–72, 2011 (in Chinese).
- Chen, L., Sun, Y., Wu, X., Zhang, Y., Zheng, C., Gao, X., and Cen, K.: Unit-based emission inventory and uncertainty assessment of coal-fired power plants, *Atmos. Environ.*, 99, 527–535, 2014.
- European Commission (EC): Joint Research Centre (JRC)/Netherlands Environmental Assessment Agency (PBL), Emission Database for Global Atmospheric Research (EDGAR), re-

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	



lease version 4.2, available at: <http://edgar.jrc.ec.europa.eu> (last access: December 2013), 2011.

- Feng, M. and Yan, H.: Research on the concentration value conversion of  $\text{NO}_x$  in the flue gas from thermal power plants, Shanxi Eletric Power, 143, 14–20, 2007 (in Chinese).
- 5 Guan, D., Liu, Z., Geng, Y., Lindner, S., and Hubacek, K.: The gigatonne gap in China's carbon dioxide inventories, *Nature Clim. Change*, 2, 672–675, 2012.
- Gurney, K.: Interactive comment on "High resolution mapping of combustion processes and implications for  $\text{CO}_2$  emissions" by R. Wang et al., *Atmos. Chem. Phys. Discuss.*, C7856–C7859, 2012.
- 10 Hao, J., Tian, H., and Lu, Y.: Emission inventories of  $\text{NO}_x$  from commercial energy consumption in China, 1995–1998, *Environ. Sci. Technol.*, 36, 552–560, 2002.
- Intergovernmental Panel on Climate Change (IPCC): 2006 IPCC guidelines for national greenhouse gas inventories, 2006.
- Kato, N. and Akimoto, H.: Anthropogenic emissions of  $\text{SO}_2$  and  $\text{NO}_x$  in Asia: emission inventories, *Atmos. Environ.*, 26, 2997–3017, 1992.
- 15 Klimont, Z., Cofala, J., Schöpp, W., Amann, M., Streets, D. G., Ichikawa, Y., and Fujita, S.: Projections of  $\text{SO}_2$ ,  $\text{NO}_x$ ,  $\text{NH}_3$  and VOC emissions in East Asia up to 2030, *Water Air Soil Pollut.*, 130, 193–198, 2001.
- Klimont, Z., Cofala, J., Bertok, I., Amann, M., Heyes, C., and Gyrfas, F.: Modeling Particulate 20 Emissions in Europe: A framework to estimate reduction potential and control costs, Interim report, IR-02-076, International Institute for Applied Systems Analysis, Laxenburg, Austria, 169 pp., 2002.
- Klimont, Z., Cofala, J., Xing, J., Wei, W., Zhang, C., Wang, S., Kejun, J., Bhandari, P., Mathur, R., Purohit, P., Rafaj, P., Chambers, A., and Amann, M.: Projections of  $\text{SO}_2$ ,  $\text{NO}_x$  and carbonaceous aerosols emissions in Asia, *Tellus B*, 61, 602–617, 2009.
- 25 Klimont, Z., Smith, S. J., Cofala, J.: The last decade of global anthropogenic sulfur dioxide: 2000–2011 emissions, *Environ. Res. Lett.*, 8, 014003, doi:10.1088/1748-9326/8/1/014003, 2013.
- Kurokawa, J., Ohara, T., Morikawa, T., Hanayama, S., Janssens-Maenhout, G., Fukui, T., Kawashima, K., and Akimoto, H.: Emissions of air pollutants and greenhouse gases over Asian regions during 2000–2008: Regional Emission inventory in ASia (REAS) version 2, *Atmos. Chem. Phys.*, 13, 11019–11058, doi:10.5194/acp-13-11019-2013, 2013.

## High-resolution power plant emission inventory for China

F. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**High-resolution  
power plant emission  
inventory for China**

F. Liu et al.

- Lei, Y., Zhang, Q., He, K. B., and Streets, D. G.: Primary anthropogenic aerosol emission trends for China, 1990–2005, *Atmos. Chem. Phys.*, 11, 931–954, doi:10.5194/acp-11-931-2011, 2011.
- Li, C., Zhang, Q., Krotkov, N. A., Streets, D. G., He, K., Tsay, S.-C., and Gleason, J. F.: Recent large reduction in sulfur dioxide emissions from Chinese power plants observed by the Ozone Monitoring Instrument, *Geophys. Res. Lett.*, 37, L08807, doi:10.1029/2010GL042594, 2010.
- Liu, Y.: Discussing on countermeasures and influence of varied coal quality in fired power plants, *Coal Quality Technology*, 6, 1–3, 2007 (in Chinese).
- Lu, Z., Streets, D. G., Zhang, Q., Wang, S., Carmichael, G. R., Cheng, Y. F., Wei, C., Chin, M., Diehl, T., and Tan, Q.: Sulfur dioxide emissions in China and sulfur trends in East Asia since 2000, *Atmos. Chem. Phys.*, 10, 6311–6331, doi:10.5194/acp-10-6311-2010, 2010.
- Lu, Z., Zhang, Q., and Streets, D. G.: Sulfur dioxide and primary carbonaceous aerosol emissions in China and India, 1996–2010, *Atmos. Chem. Phys.*, 11, 9839–9864, doi:10.5194/acp-11-9839-2011, 2011.
- National Bureau of Statistics (NBS): China Energy Statistical Yearbook (1990, 1991–1996, 1997–1999, 2000–2002, 2004, 2005, 2006, 2007, 2008, 2009, 2010 editions), China Statistics Press: Beijing, China, 1992–2011.
- National Bureau of Statistics (NBS): China Statistical Yearbook, China Statistics Press, Beijing, China, 1997–2011.
- National Bureau of Statistics (NBS): China Statistical Database, available at: <http://data.stats.gov.cn/>, last access: December 2013.
- National Development and Reform Commission (NDRC): List of retired electric generating units in China, available at: <http://bgt.ndrc.gov.cn/zcfb/> (last access: December 2013), 2013 (in Chinese).
- Oda, T. and Maksyutov, S.: A very high-resolution ( $1\text{ km} \times 1\text{ km}$ ) global fossil fuel CO<sub>2</sub> emission inventory derived using a point source database and satellite observations of nighttime lights, *Atmos. Chem. Phys.*, 11, 543–556, doi:10.5194/acp-11-543-2011, 2011.
- Ohara, T., Akimoto, H., Kurokawa, J., Horii, N., Yamaji, K., Yan, X., and Hayasaka, T.: An Asian emission inventory of anthropogenic emission sources for the period 1980–2020, *Atmos. Chem. Phys.*, 7, 4419–4444, doi:10.5194/acp-7-4419-2007, 2007.
- Qian, C.: Study on air staged low NO<sub>x</sub> emission combustion technology, Shanghai Electricity, 1, 38–40, 2010 (in Chinese).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

High-resolution  
power plant emission  
inventory for China

F. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Shen, L. and Song, S.: Effects of coal quality on boiler and countermeasures, Shandong Electric Power, 37–41, 2010 (in Chinese).
- State Environmental Protection Administration of China (SEPA): Emission Standard of Air Pollutants for Thermal Power Plants: GB 13223-1996, China Environmental Science Press, Beijing, China, 1996.
- State Environmental Protection Administration of China (SEPA): Emission Standard of Air Pollutants for Thermal Power Plants: GB 13223-2003, China Environmental Science Press, Beijing, China, 2003.
- Streets, D. G., Bond, T. C., Carmichael, G. R., Fernandes, S. D., Fu, Q., He, D., Klimont, Z., Nelson, S. M., Tsai, N. Y., Wang, M. Q., Woo, J. H., and Yarber, K. F.: An inventory of gaseous and primary aerosol emissions in Asia in the year 2000, *J. Geophys. Res.*, 108, 8809, doi:10.1029/2002jd003093, 2003.
- Tang, S., Sun, S., Qin, Y., Jiang, Y., and Wang, W.: Distribution characteristics of sulfur and the main harmful trace elements in China's coal, *Acta Geol. Sin.*, 82, 722–730, 2008.
- Tian, H.: Studies on present and future emissions of nitrogen oxides and its comprehensive control policies in China, PhD thesis, Tsinghua University, Beijing, 2003 (in Chinese).
- Tian, H., Liu, K., Hao, J., Wang, Y., Gao, J., Qiu, P., and Zhu, C.: Nitrogen oxides emissions from thermal power plants in China: Current status and future predictions, *Environ. Sci. Technol.*, 47, 11350–11357, 2013.
- Ummel, K.: CARMA revisited: An updated database of carbon dioxide emissions from power plants worldwide, Center for Global Development, Working Paper 304, 2012.
- Wang, R., Tao, S., Ciais, P., Shen, H. Z., Huang, Y., Chen, H., Shen, G. F., Wang, B., Li, W., Zhang, Y. Y., Lu, Y., Zhu, D., Chen, Y. C., Liu, X. P., Wang, W. T., Wang, X. L., Liu, W. X., Li, B. G., and Piao, S. L.: High-resolution mapping of combustion processes and implications for CO<sub>2</sub> emissions, *Atmos. Chem. Phys.*, 13, 5189–5203, doi:10.5194/acp-13-5189-2013, 2013.
- Wang, S. W., Zhang, Q., Streets, D. G., He, K. B., Martin, R. V., Lamsal, L. N., Chen, D., Lei, Y., and Lu, Z.: Growth in NO<sub>x</sub> emissions from power plants in China: Bottom-up estimates and satellite observations, *Atmos. Chem. Phys.*, 12, 4429–4447, doi:10.5194/acp-12-4429-2012, 2012.
- Wang, S. W., Zhang, Q., Martin, R. V., Philip, S., Liu, F., Li, M., and He, K. B.: Satellite measurements oversee China's sulfur dioxide emission reductions from coal-fired power plants, *Environ. Sci. Technol.*, submitted, 2015.

## High-resolution power plant emission inventory for China

F. Liu et al.

- Wang, X., Xin, H., Luan, T., and Cheng, L.: Research and test on influence of boiler combustion adjusting on  $\text{NO}_x$  emission of 330MW unit, *Power System Eng.*, 23, 7–10, 2007 (in Chinese).
- Wang, X., Luan, T., and Cheng, L.: Experimental study on performance and  $\text{NO}_x$  emission of large coal-fired boilers, *Power Equipment*, 6, 467–472, 2008 (in Chinese).
- 5 Wheeler, D. and Ummel, K.: Calculating CARMA: Global estimation of  $\text{CO}_2$  emissions from the power sector, Center for Global Development, Working Paper 145, 2008.
- Xie, J., Zhang, S., and Xia, Y.: Analysis of performance and  $\text{NO}_x$  emission of 600MW boilers, *Dongfang Boiler*, 3, 12–16, 2008 (in Chinese).
- Xie, Z.: Wet dedusting, desulfurization and denitrification without using additives for coal-fired 10 boilers, *China Environmental Protection Industry*, 3, 22–23, 1995 (in Chinese).
- Xu, Y.: China's functioning market for sulfur dioxide scrubbing technologies, *Environ. Sci. Technol.*, 45, 9161–9167, 2011.
- Xu, Y., Williams, R. H., and Socolow, R. H.: China's rapid deployment of  $\text{SO}_2$  scrubbers, *Environ. Sci. Environ. Sci.*, 2, 459–465, 2009.
- 15 Yao, W.: Experiment on the  $\text{SO}_2$  removal efficiency of wet scrubbers, *Environmental Protection*, 2, 11–13, 1989 (in Chinese).
- Yi, H. H., Hao, J. M., Duan, L., Li, X. H., and Guo, X. M.: Characteristics of inhalable particulate matter concentration and size distribution from power plants in China, *J. Air Waste Manage.*, 56, 1243–1251, 2006.
- 20 Zhang, L., Wang, S., Meng, Y., and Hao, J.: Influence of mercury and chlorine content of coal on mercury emissions from coal-fired power plants in China, *Environ. Sci. Technol.*, 46, 6385–6392, 2012.
- Zhang, Q., Streets, D. G., He, K., Wang, Y., Richter, A., Burrows, J. P., Uno, I., Jang, C. J., Chen, 25 D., Yao, Z., and Lei, Y.:  $\text{NO}_x$  emission trends for China, 1995–2004: The view from the ground and the view from space, *J. Geophys. Res.*, 112, D22306, doi:10.1029/2007jd008684, 2007.
- Zhang, Q., Streets, D. G., Carmichael, G. R., He, K. B., Huo, H., Kannari, A., Klimont, Z., Park, I. S., Reddy, S., Fu, J. S., Chen, D., Duan, L., Lei, Y., Wang, L. T., and Yao, Z. L.: Asian emissions in 2006 for the NASA INTEX-B mission, *Atmos. Chem. Phys.*, 9, 5131–5153, doi:10.5194/acp-9-5131-2009, 2009.
- 30 Zhang, X., Sun, R., Sun, S., and Qin, M.: Effects of stereo-staged combustion technique on  $\text{NO}_x$  emission characteristics, *J. Mech. Eng.*, 45, 199–205, 2009 (in Chinese).

Discussion Paper | Discussion Paper

Discussion Paper | Discussion Paper

<a href="#">Title Page</a>	<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>	
<a href="#">Tables</a>	<a href="#">Figures</a>	
<a href="#">◀</a>	<a href="#">▶</a>	
<a href="#">◀</a>	<a href="#">▶</a>	
<a href="#">Back</a>	<a href="#">Close</a>	
<a href="#">Full Screen / Esc</a>		
<a href="#">Printer-friendly Version</a>		
<a href="#">Interactive Discussion</a>		



**High-resolution  
power plant emission  
inventory for China**

F. Liu et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

## High-resolution power plant emission inventory for China

F. Liu et al.

**Table 1.** Summary of NO<sub>x</sub> emission factors for different types of coal-fired power plants.

Unit Size	Combustion Technology	Bituminous Coal, g kg <sup>-1</sup> <sup>a</sup>	Average Emission Factor, g kg <sup>-1</sup> <sup>a</sup>	Anthracite Coal, g kg <sup>-1</sup> <sup>a</sup>	Average Emission Factor, g kg <sup>-1</sup> <sup>a</sup>
Large ( $\geq 300$ MW)	Advanced LNB <sup>b</sup>	2.88 <sup>1</sup> , 3.05 <sup>2</sup> , 3.28 <sup>3</sup> , 3.55 <sup>4</sup> , 4.13 <sup>5</sup> , 4.17 <sup>6</sup> , 4.64 <sup>7</sup>	4.06	6.14 <sup>7</sup> , 6.58 <sup>4</sup> , 6.99 <sup>8</sup>	6.50
	Traditional LNB	4.40 <sup>9</sup> , 4.98 <sup>10</sup> , 5.23 <sup>11</sup> , 5.06 <sup>12</sup> , 5.65 <sup>8</sup> , 7.78 <sup>5</sup>	5.08	4.61 <sup>11</sup> , 4.99 <sup>12</sup> , 7.77 <sup>7</sup> , 7.94 <sup>8</sup> , 8.05 <sup>10</sup> , 8.73 <sup>9</sup>	8.04
Medium ( $\geq 100$ MW and $< 300$ MW)	Traditional LNB	4.34 <sup>10</sup> , 5.52 <sup>11</sup> , 6.97 <sup>13</sup>	6.78	7.07 <sup>11</sup> , 7.56 <sup>10</sup>	7.29
	Non-LNB	5.46 <sup>14</sup> , 8.12 <sup>11</sup>	7.63	8.25 <sup>10</sup> , 12.11 <sup>11</sup>	10.46
Small ( $< 100$ MW)	Non-LNB	6.55 <sup>15</sup> , 6.88 <sup>11</sup>	6.66	10.01 <sup>15</sup> , 11.50 <sup>11</sup>	10.50

<sup>a</sup> Sample weighted mean

<sup>b</sup> LNB: Low-NQ Burners

Data sources: <sup>1</sup> Qian (2010), <sup>2</sup> Cao and Liu (2011), <sup>3</sup> Zhu (2009), <sup>4</sup> Wang et al. (2008), <sup>5</sup> Yi et al. (2006), <sup>6</sup> Zhu et al. (2009), <sup>7</sup> Xie et al. (2008), <sup>8</sup> Wang et al. (2007), <sup>9</sup> Bi and Chen (2004), <sup>10</sup> Tian (2003), <sup>11</sup> Zhu (2011), <sup>12</sup> Zhu et al. (2004), <sup>13</sup> Feng and Yan (2007), <sup>14</sup> Zhao et al. (2010), <sup>15</sup> Zhao et al. (2008)



**Table 2.** Summary of the mass fractions of particulate matter of different size fractions to the total particulate matter in fly ash for different types of boilers\*; values are given as percentages (%).

Size Fraction	Boiler Type		
	Pulverized Boilers	Circulating Fluidized Beds	Grate Furnaces
PM <sub>&gt;10</sub>	77	71	63
PM <sub>2.5–10</sub>	17	22	23
PM <sub>2.5</sub>	6	7	14

\* Data sources: Klimont et al. (2002) and Zhao et al. (2010).

- [Title Page](#)
- [Abstract](#) | [Introduction](#)
- [Conclusions](#) | [References](#)
- [Tables](#) | [Figures](#)
- [◀](#) | [▶](#)
- [◀](#) | [▶](#)
- [Back](#) | [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)



**Table 3.** Removal efficiencies of different control technologies for SO<sub>2</sub> and particulate matters; values are given as percentages (%).

Technology	SO <sub>2</sub>	PM <sub>2.5</sub>	PM <sub>2.5–10</sub>	PM <sub>&gt;10</sub>
Cyclones		10	70	90
Wet scrubbers	20	50	90	99
Electrostatic Precipitators		93	98	99.5
FGD <sup>a</sup>	78 <sup>b</sup>	50	90	99
Bag Filters		99	99.5	99.9

<sup>a</sup> FGD: Flue-gas Desulfurization<sup>b</sup> Time dependent parameter, 78 % is the coal-consumption weighted mean efficiency in 2010.[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

## High-resolution power plant emission inventory for China

F. Liu et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Table 4.** Capacity sizes, technology penetrations, fuel qualities, emission factors and emissions of coal-fired power plants in China from 1990 to 2010.

Category	Subcategory	1990	1995	2000	2005	2006	2007	2008	2009	2010
Capacity Size*	< 100 MW	39.3%	34.0%	29.1%	25.5%	23.1%	19.1%	15.3%	13.1%	11.5%
	[100, 300) MW	48.7%	44.0%	35.7%	31.1%	29.1%	26.7%	23.9%	21.4%	18.7%
	[300, 600) MW	10.9%	19.9%	30.1%	33.4%	34.0%	33.2%	33.3%	34.3%	35.4%
	≥ 600 MW	1.2%	2.2%	5.0%	9.9%	13.8%	21.0%	27.5%	31.2%	34.4%
Technology Penetration*	Traditional LNB	12.0%	22.1%	38.7%	53.7%	51.8%	46.6%	44.2%	42.1%	39.4%
	Advanced LNB	0.0%	0.0%	0.0%	0.0%	7.4%	19.8%	29.2%	35.9%	42.0%
	FGD	0.1%	1.0%	2.1%	12.2%	29.5%	49.9%	70.2%	81.9%	85.6%
	Cyclones	7.6%	7.4%	5.2%	3.6%	3.0%	2.3%	1.6%	0.7%	0.3%
	Wet Scrubbers	46.3%	40.4%	19.0%	6.9%	6.1%	5.0%	3.9%	3.1%	2.5%
	Electrostatic Precipitators	44.3%	49.8%	72.5%	86.1%	87.5%	89.1%	90.8%	92.0%	92.8%
	Bag Filters	1.7%	2.3%	3.3%	3.4%	3.4%	3.5%	3.7%	4.2%	4.4%
Fuel Quality	Heating Value ( $\text{kJ g-coal}^{-1}$ )	20.1	20.2	21.0	19.0	19.3	20.0	19.3	18.9	18.8
	Coal Consumption Rate ( $\text{gce kWh}^{-1}$ )	406.7	389.0	374.3	356.4	351.8	343.5	335.3	330.5	327.1
	Sulfur Content (%)	1.07	1.12	1.10	1.04	1.03	1.00	0.97	0.95	0.95
Emission Factor	$\text{SO}_2$ ( $\text{g kWh}^{-1}$ )	10.73	9.82	9.15	8.69	7.47	5.34	4.06	3.00	2.48
	$\text{NO}_x$ ( $\text{g kWh}^{-1}$ )	4.14	3.82	3.37	3.41	3.23	2.92	2.84	2.78	2.67
	$\text{PM}_{2.5}$ ( $\text{g kWh}^{-1}$ )	2.34	1.84	1.12	0.73	0.62	0.48	0.39	0.31	0.27
	$\text{CO}_2$ ( $\text{g kWh}^{-1}$ )	1126.1	1077.1	1036.5	986.9	974.1	951.2	928.4	915.1	905.6
	$\text{SO}_2$ ( $\text{g kg-coal}^{-1}$ )	18.12	17.42	17.52	15.85	14.03	10.62	7.98	5.84	4.89
	$\text{NO}_x$ ( $\text{g kg-coal}^{-1}$ )	7.00	6.78	6.46	6.23	6.07	5.81	5.58	5.41	5.26
	$\text{PM}_{2.5}$ ( $\text{g kg-coal}^{-1}$ )	3.95	3.26	2.14	1.33	1.17	0.96	0.77	0.61	0.53
Emissions	$\text{CO}_2$ ( $\text{Pg year}^{-1}$ )	1902.9	1910.8	1984.8	1801.2	1828.1	1890.6	1822.9	1784.3	1781.9
	$\text{SO}_2$ ( $\text{Tg year}^{-1}$ )	4.94	7.74	9.27	16.70	16.73	14.15	10.96	8.22	7.71
	$\text{NO}_x$ ( $\text{Tg year}^{-1}$ )	1.91	3.01	3.42	6.56	7.24	7.75	7.67	7.62	8.29
	$\text{PM}_{2.5}$ ( $\text{Tg year}^{-1}$ )	1.08	1.45	1.13	1.40	1.39	1.28	1.06	0.85	0.83
	$\text{CO}_2$ ( $\text{Pg year}^{-1}$ )	0.52	0.85	1.05	1.90	2.18	2.52	2.51	2.51	2.81

\* Shares of coal consumption for each capacity size/technology.

Year	Grid	Capacity Size (MW)*				Technology Penetration*			Sulfur Content (%)	Emission Factor (g kWh⁻¹)			
		(0, 100]	[100, 300]	[300, 600]	≥ 600	FGD	LNB	ESP		SO₂	NOₓ	PM₂.₅	CO₂
2005	North	20.0%	29.6%	36.4%	14.0%	14.5%	62.6%	89.1%	1.05	8.74	3.36	0.66	954.6
	Northeast	23.9%	41.2%	24.5%	10.4%	2.1%	43.7%	79.6%	0.41	4.01	3.99	1.18	1094.0
	East	17.6%	18.4%	39.7%	24.3%	27.1%	70.5%	92.2%	0.74	5.28	2.96	0.45	958.9
	Central	22.3%	30.6%	45.0%	2.1%	9.5%	57.6%	87.1%	1.45	12.56	3.76	0.96	971.4
	Northwest	23.3%	29.4%	40.4%	6.9%	0.2%	59.9%	92.0%	1.21	11.09	3.40	0.69	1001.5
	South	18.4%	30.7%	39.1%	11.8%	18.3%	66.9%	88.6%	1.45	12.66	3.52	0.74	1038.2
2010	North	11.1%	21.4%	38.4%	29.2%	88.0%	81.4%	91.0%	1.00	2.45	2.79	0.26	914.7
	Northeast	12.9%	24.5%	31.1%	31.5%	60.1%	73.6%	89.0%	0.51	2.23	3.32	0.55	1042.9
	East	10.0%	7.1%	25.7%	57.2%	94.3%	87.2%	96.2%	0.69	1.26	2.28	0.16	877.3
	Central	6.2%	17.5%	36.1%	40.2%	78.7%	86.6%	92.6%	1.18	3.27	2.73	0.34	821.7
	Northwest	10.1%	20.2%	39.8%	29.9%	77.0%	83.8%	95.7%	0.98	3.44	2.78	0.27	956.7
	South	4.4%	14.4%	39.8%	41.4%	92.7%	91.4%	98.0%	1.32	3.41	2.56	0.20	904.4

\* Shares of coal consumption for each capacity size/technology.




**Table 6.** Uncertainty ranges of emission estimates for a large coal-fired generation unit (600 MW, pulverized boiler, equipped with FGD, LNB, and an electrostatic precipitator) in China; the values represent the 95 % CI around the mean.

Year	2000	2010
Species		
SO <sub>2</sub>	−58 to 56 %	−21 to 14 %
NO <sub>x</sub>	−100 to 179 %	−28 to 47 %
PM <sub>2.5</sub>	−61 to 95 %	−38 to 49 %
CO <sub>2</sub>	−28 to 33 %	−16 to 18 %

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)




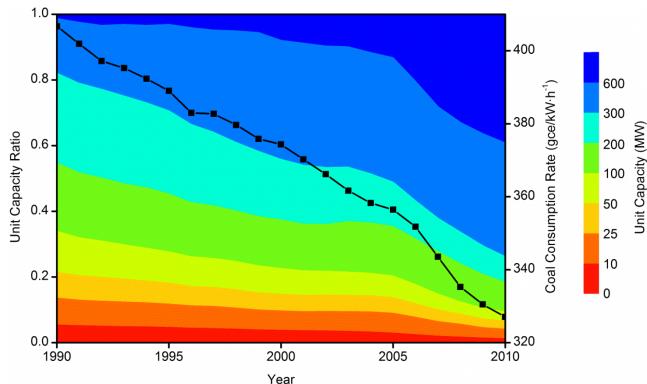

**Figure 1.** Trends in generation mix by capacity and the average coal consumption rates (black line) during 1990–2010.

**High-resolution  
power plant emission  
inventory for China**


F. Liu et al.

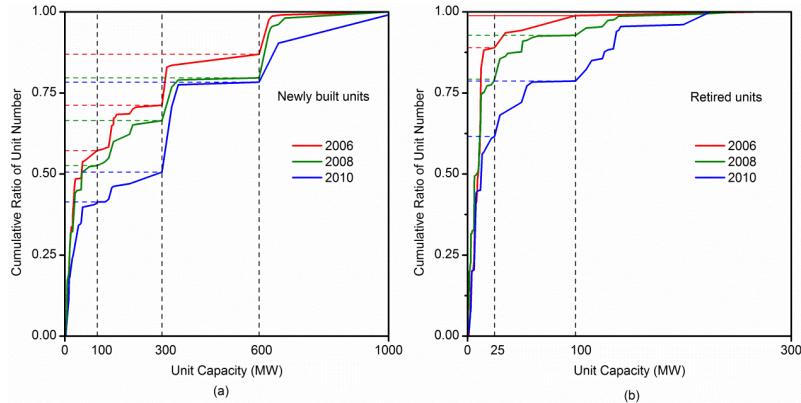

**Figure 2.** Cumulative ratio of unit number for (a) newly constructed and (b) retired electric generating units for 2006, 2008 and 2010. The units are sorted according to ascending capacity along the x axis.


**High-resolution  
power plant emission  
inventory for China**

F. Liu et al.

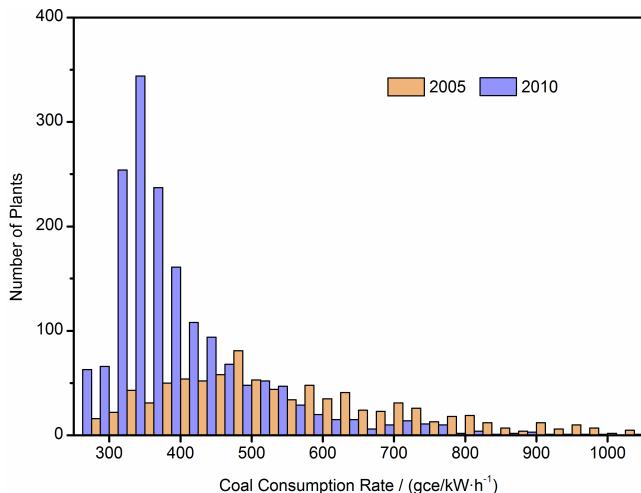
**Figure 3.** Distribution of coal consumption rates in coal-fired power plants in 2005 and 2010.

**High-resolution  
power plant emission  
inventory for China**


F. Liu et al.

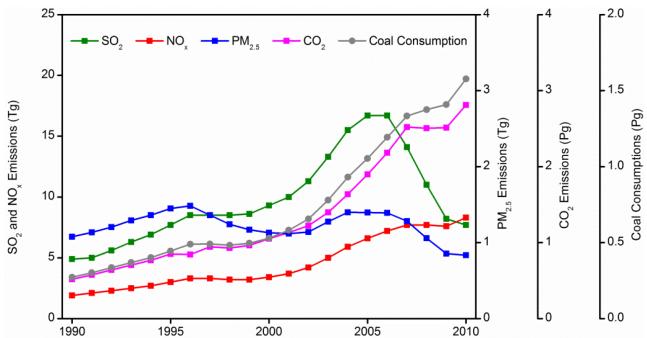

**Figure 4.** Coal consumptions and emissions of  $\text{SO}_2$ ,  $\text{NO}_x$ ,  $\text{PM}_{2.5}$  and  $\text{CO}_2$  of coal-fired power plants in China from 1990 to 2010.

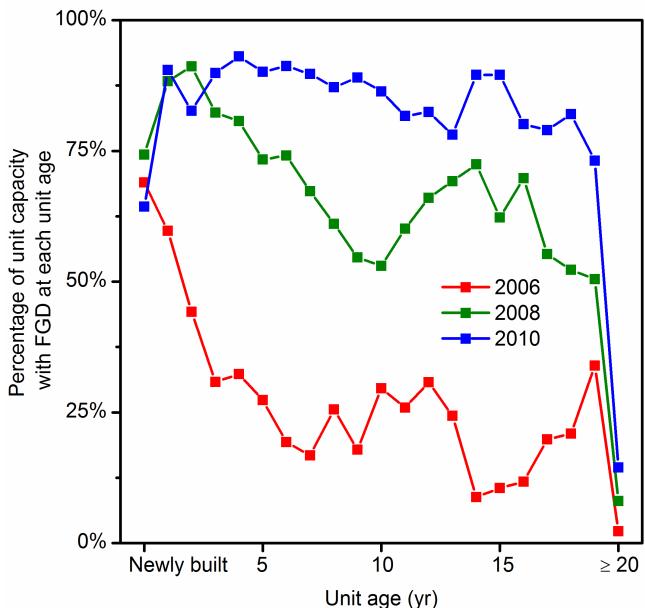


**Figure 5.** Distributions of FGD penetration for electric generating units of various ages in 2006, 2008 and 2010.

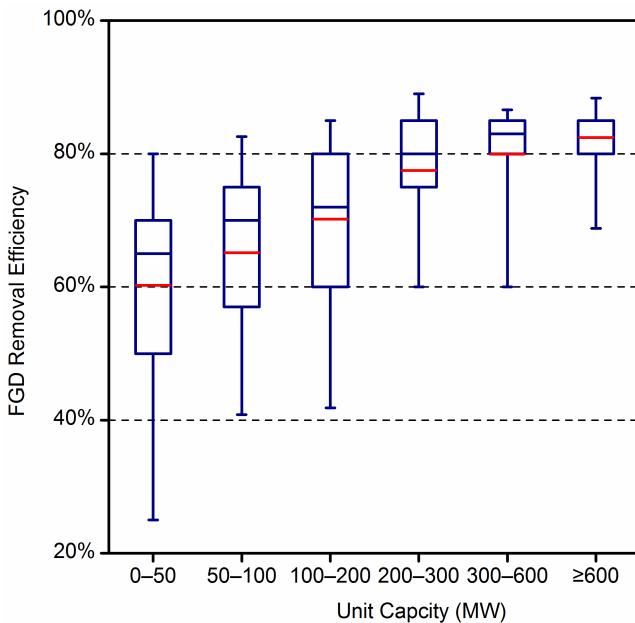

**Figure 6.** FGD removal efficiencies for electric generating units of various sizes in China in 2010. The blue horizontal line represents the median of the removal efficiencies, the red horizontal line represents the mean removal efficiencies, the box denotes the 25 and 75 % percentiles, and the whiskers denote the 5 and 95 % percentiles.

**High-resolution  
power plant emission  
inventory for China**


F. Liu et al.

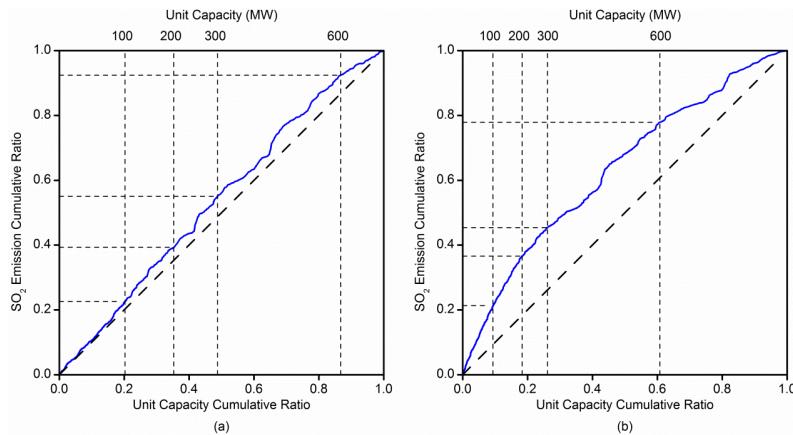

**Figure 7.** Cumulative ratio of  $\text{SO}_2$  emissions by unit capacity for the years **(a)** 2005 and **(b)** 2010. The units are sorted according to ascending capacity along the x axis.

## High-resolution power plant emission inventory for China


F. Liu et al.

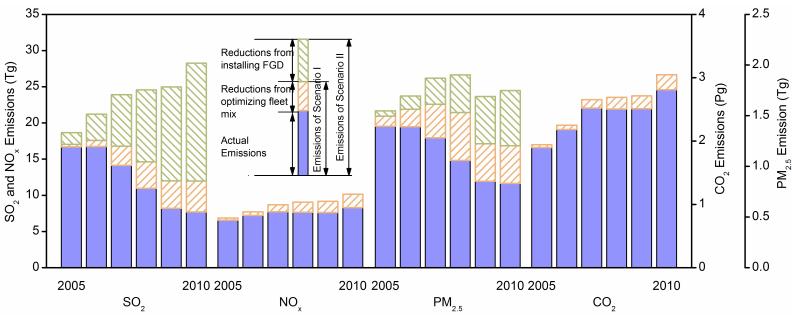

**Figure 8.** Reductions in  $\text{SO}_2$ ,  $\text{NO}_x$ ,  $\text{PM}_{2.5}$  and  $\text{CO}_2$  emissions from major emission control measures during the 11th five-year period (2005–2010). The solid blue bar denotes our estimates of inter-annual power plant emissions. The green and yellow bars illustrate the reduction in emissions due to FGD installations and optimization of the generation unit fleet mix, respectively.

**High-resolution  
power plant emission  
inventory for China**


F. Liu et al.

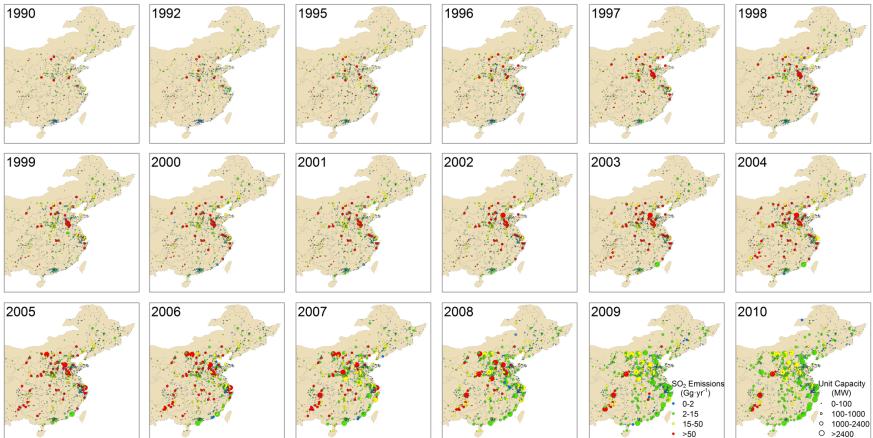

**Figure 9.** Evolution of SO<sub>2</sub> emissions from coal-fired power plants in China, 1990–2010. Units: Gg yr<sup>-1</sup>.

**High-resolution  
power plant emission  
inventory for China**


F. Liu et al.

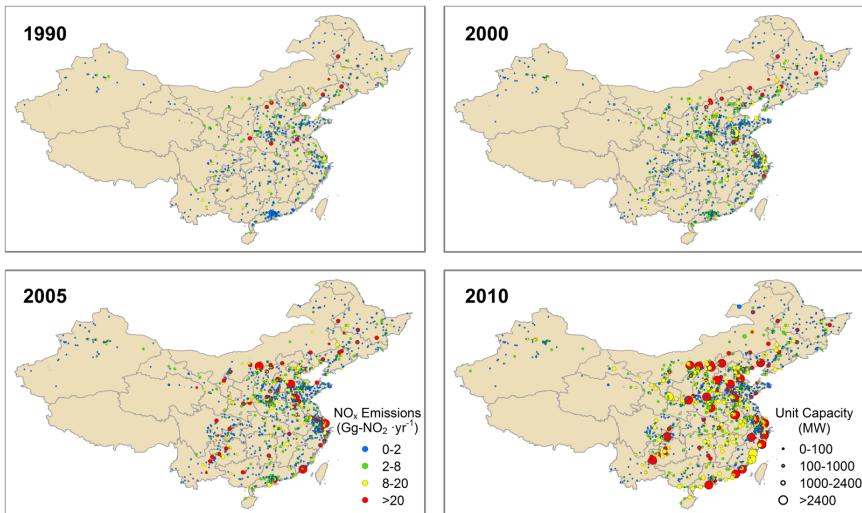


**Figure 10.** Spatial distribution of NO<sub>x</sub> emissions from China's coal-fired power plants in 1990, 2000, 2005 and 2010. Units: Gg-NO<sub>x</sub> yr<sup>-1</sup>.

**High-resolution  
power plant emission  
inventory for China**

F. Liu et al.

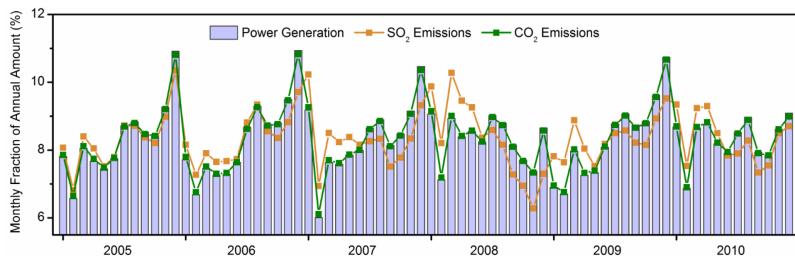

**Figure 11.** Monthly profiles of thermal power generation and coal-fired power plant  $\text{SO}_2$  and  $\text{CO}_2$  emissions in China. The y axis values represent the fraction of the monthly emissions to annual emissions.

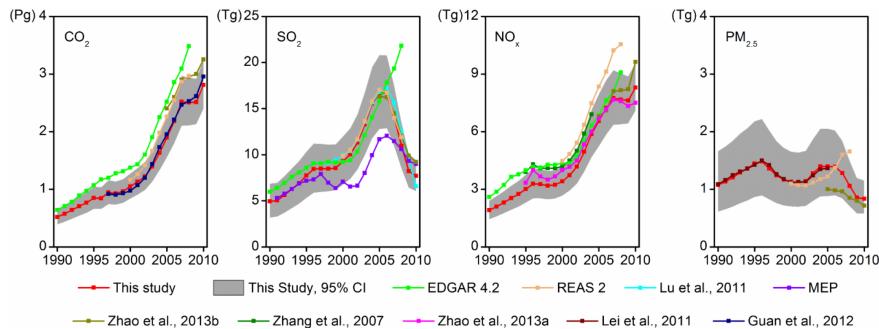


**Figure 12.** Comparisons of SO<sub>2</sub>, NO<sub>x</sub>, PM<sub>2.5</sub> and CO<sub>2</sub> emissions from China's coal-fired power plants during 1990 and 2010.

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)




## High-resolution power plant emission inventory for China

F. Liu et al.

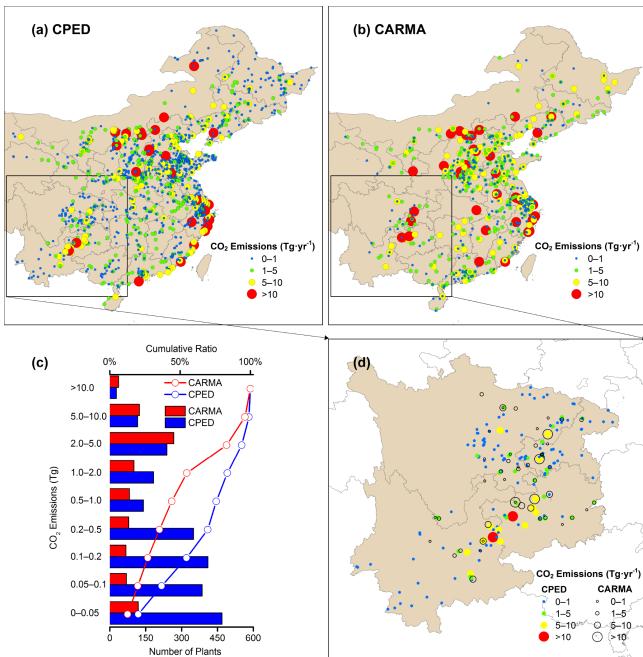

**Figure 13.** **(a)** Spatial distribution of CO<sub>2</sub> emissions in CPED in 2009. **(b)** Spatial distribution of CO<sub>2</sub> emissions in CARMA in 2009. **(c)** Comparisons of CO<sub>2</sub> emissions between CARMA and CPED by plant numbers in 2009. The plants are sorted according to ascending CO<sub>2</sub> emissions along the y axis. The red and blue lines denote the plant number cumulative ratio for CARMA and CPED, respectively. **(d)** Comparisons of the spatial distribution of CO<sub>2</sub> emissions in southwest China between CARMA and CPED in 2009.

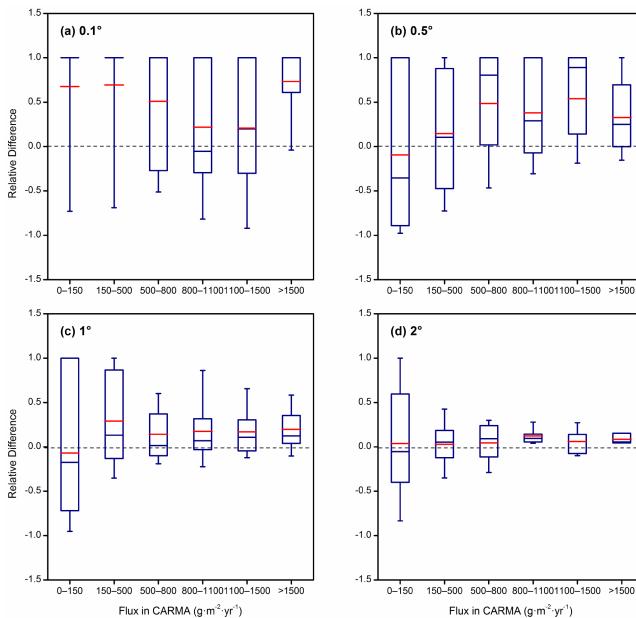

**Figure 14.** Comparisons of CO<sub>2</sub> emissions between CARMA and CPED for various spatial resolutions (from 0.1 to 2°) in 2009. The box plots show the binned relative differences  $(a - b)/(a + b)$ , where  $a$  is the CARMA estimate, and  $b$  is the CPED estimate. The blue horizontal line is the median of the relative differences, the red horizontal line is the mean of the relative differences, the box denotes the 25 and 75 % percentiles, and the whiskers denote the 10 and 90 % percentiles. A perfect agreement would correspond to a median and mean equal to zero.