

This discussion paper is/has been under review for the journal *Atmospheric Chemistry and Physics (ACP)*. Please refer to the corresponding final paper in *ACP* if available.

# IASI spectral radiance performance validation: case study assessment from the JAIVEx field campaign

A. M. Larar<sup>1</sup>, W. L. Smith<sup>2,3</sup>, D. K. Zhou<sup>1</sup>, X. Liu<sup>1</sup>, H. Revercomb<sup>3</sup>, J. P. Taylor<sup>4</sup>, S. M. Newman<sup>4</sup>, and P. Schlüssel<sup>5</sup>

<sup>1</sup>NASA Langley Research Center, Hampton, VA, USA

<sup>2</sup>Hampton University, Hampton, VA, USA

<sup>3</sup>University of Wisconsin-Madison, Madison, WI, USA

<sup>4</sup>Met Office, Exeter, Devon, UK

<sup>5</sup>EUMETSAT, Darmstadt, Germany

Received: 26 February 2009 – Accepted: 7 April 2009 – Published: 23 April 2009

Correspondence to: A. M. Larar (allen.m.larar@nasa.gov)

Published by Copernicus Publications on behalf of the European Geosciences Union.

ACPD

9, 10193–10234, 2009

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



## Abstract

ACPD

9, 10193–10234, 2009

Advanced satellite sensors are tasked with improving global-scale measurements of the Earth's atmosphere, clouds, and surface to enable enhancements in weather prediction, climate monitoring, and environmental change detection. Measurement system validation is crucial to achieving this goal and maximizing research and operational utility of resultant data. Field campaigns employing satellite under-flights with well-calibrated Fourier Transform Spectrometer (FTS) sensors aboard high-altitude aircraft are an essential part of this validation task. The National Polar-orbiting Operational Environmental Satellite System (NPOESS) Airborne Sounder Testbed-Interferometer (NAST-I) has been a fundamental contributor in this area by providing coincident high spectral and spatial resolution observations of infrared spectral radiances along with independently-retrieved geophysical products for comparison with like products from satellite sensors being validated. This manuscript focuses on validating infrared spectral radiance from the Infrared Atmospheric Sounding Interferometer (IASI) through a case study analysis using data obtained during the recent Joint Airborne IASI Validation Experiment (JAIVEx) field campaign. Emphasis is placed upon the benefits achievable from employing airborne interferometers such as the NAST-I since, in addition to IASI radiance calibration performance assessments, cross-validation with other advanced sounders such as the AQUA Atmospheric InfraRed Sounder (AIRS) is enabled.

## 20 1 Introduction

The performance of post-launch validation activities is crucial to verify the quality of satellite measurement systems. It is essential to address all components of the measurement system, i.e., sensors, algorithms, along with direct and derived data products, and continue such activities throughout program life to enable long-term monitoring of system performance for ensuring maximum research and operational utility of resultant data. Field experiment campaigns employing satellite under-flights with well-calibrated

### IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Fourier Transform Spectrometer (FTS) sensors aboard high-altitude aircraft are an essential part of this validation task. Specifically, airborne FTS systems can enable an independent, International System of Units (SI) traceable measurement system validation by directly measuring the same level-1 parameters spatially and temporally coincident with the satellite sensor of interest. Continuation of aircraft under-flights for multiple satellites during multiple field campaigns enables long-term monitoring of system performance and inter-satellite cross-validation. Data from campaign under-flights with airborne FTS systems, such as the National Polar-orbiting Operational Environmental Satellite System (NPOESS) Airborne Sounder Testbed- Interferometer (NAST-I) (Cousins et al., 1997; Smith et al., 1999), have proven to be very useful in earlier Atmospheric InfraRed Sounder (AIRS) (Aumann et al., 2003; Pagano et al., 2003) and Infrared Atmospheric Sounding Interferometer (IASI) (Blumstein et al., 2004) validation studies (Larar et al., 2003, 2005, 2008a, 2008b; Newman et al., 2009; Tobin et al., 2006; Zhou et al., 2007a). NAST-I, maintained and deployed internationally by NASA Langley Research Center (LaRC), serves as an ideal validation sensor since it measures the same level-1 quantity as many sensors it helps to validate (i.e. infrared spectral radiance), and does so at higher spectral and spatial resolutions. LaRC analysis is further benefited from implementing an independent set of algorithms associated with, e.g., fast radiative transfer modeling and geophysical product retrievals to enable an independent, concurrent validation of derived level-2 products (Liu et al., 2007; Zhou et al., 2007a). Field campaign data from coincident measurement assets (i.e., ground, balloon, aircraft, and satellite) are then available for not only the implementation and improvement of validation methodologies but, also, to implement, validate, and improve radiative transfer and retrieval algorithms and future measurement system specifications (e.g., Carissimo et al., 2006; Grieco et al., 2007; Strow et al., 2006, 2008; Liu et al., 2009; Serio et al., 2009; Taylor et al., 2008; Zhou et al., 2009). This manuscript focuses on validating infrared spectral radiance from the IASI instrument through a case study analysis using data obtained during the recent Joint Airborne IASI Validation Experiment (JAIVEx) field campaign. Emphasis is placed upon the

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



benefits achievable from employing airborne interferometers such as the NAST-I for not only IASI radiance calibration performance assessment but, also, cross-validation with other advanced sounders such as the AQUA AIRS. Cross-validation is important for referencing new observations to earlier-validated and accepted measurement assets to ensure high-quality dataset time series continuity. An overview of the JAIVEx field campaign, case study day, and instrument systems utilized for this analysis is first given. The validation methodology implemented and approach followed for assessing and inter-comparing infrared spectral radiance are then discussed. Results are then presented, followed by a summary and conclusions section. Separate papers within this IASI Special Issue publication address details of validation for derived geophysical products along with retrieval and radiative transfer models (Zhou et al., 2009; Liu et al., 2009).

## 2 JAIVEx field campaign and case study day

The JAIVEx was a United States/European collaboration focusing on validation of radiance and geophysical products from the MetOp-A (IASI/AMSU) and AQUA (AIRS/AMSU) sensors. Although all measurements on the MetOp-A and A-train satellites were of interest, the focus of JAIVEx (Smith et al., 2008) was on the validation of radiance and geophysical products from the IASI, including inter-comparisons with similar products from the AIRS. IASI, launched 19 October, 2006 on MetOp-A, is the first of the advanced ultra-spectral resolution temperature, humidity, and trace gas sounding instruments to be flown on the Joint Polar System (JPS) of NPOESS and MetOp operational satellites for the purpose of improved weather, climate, and air quality observation and forecasting (Chalon, 2001). The field phase of JAIVEx was conducted out of the NASA Johnson Space Center Ellington Field (EFD) in Houston, TX, between 14 April–4 May, 2007. The NASA WB-57 high-altitude aircraft and UK Facility for Airborne Atmospheric Measurements (FAAM) BAe146-301 aircraft (Taylor et al., 2008), well-instrumented with remote and in-situ sensors, flew coordinated sorties over the

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



## 2.1 Case study flight day

- 5 Data from the 29 April 2007 JAIVEx flight day will be utilized for all analysis presented within this manuscript. The flight mission objective that day was to coordinate the WB-57 and BAe-146 aircraft for under-flight of the MetOp (15:50 GMT) and AQUA (19:19 GMT) satellites over the northern Gulf of Mexico. Figure 1 illustrates this flight  
10 sortie with the GOES imager scenes shown for (a) infrared, (b) visible, and (c) wa-  
ter vapor band extended scenes as observed by GOES (16:02 GMT), and (d) depicts  
the flight profile executed by the WB-57. The WB-57 flew a north-south-oriented oval  
racetrack pattern (at 17 km) in between satellite overpass events, while the BAe-146  
characterized the atmosphere and surface, from a range of altitudes below the WB-  
57. The WB-57 arrived on-station 20 min prior to MetOp, and remained until 10 s after  
15 AQUA (for a 3 h and 50 min on-station duration). Conditions ranged from very clear on  
the northern part of the race track, to low, puffy cumulus sparsely populating the south-  
ern extent of the flight profile, with a north-south water vapor gradient, as is shown in  
the GOES images of Fig. 1a–c. Figure 2 shows the sub-satellite tracks for Metop (IASI)  
and AQUA (AIRS) in (a) and (b), while the NAST-I nadir track is shown within the IASI  
20 imager and MODIS scenes in (c) and (d), respectively.

## 2.2 Instrument systems utilized in case study analysis

Data from several different remote sensors were incorporated into this analysis; most importantly, the high spectral resolution infrared systems under direct comparison include the airborne NAST-I and Scanning High-resolution Interferometer Sounder (S-HIS) FTS systems, along with the satellite-based AIRS discrete-channel grating spectrometer, and the IASI FTS. The NAST-Interferometer, NAST-I (Cousins et al., 1997;  
25

### IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Gazarik et al., 1998; Prutzer et al., 1998), high spectral resolution ( $0.25\text{ cm}^{-1}$ ) data are collected over the 3.7–15.5 micron spectral range, using a step and stare scanning mirror to obtain  $\pm 48.4^\circ$  cross-range coverage with thirteen atmospheric scene views. The instrument's instantaneous field of view (IFOV) translates into a 0.13 km ground footprint at nadir for each 1.0 km of aircraft altitude (i.e. 2.2 km footprint from a 17 km WB-57 altitude). The S-HIS, developed and implemented by the University of Wisconsin-Madison Space Science Engineering Center (SSEC), measures emitted thermal radiation at high spectral resolution between 3.3 and 18 microns, with 1.5 km resolution (at nadir) across a 30 km ground swath from a nominal flight altitude of 15 km (Revercomb et al., 1998, 2003). AIRS (Aumann et al., 2003; Pagano et al., 2003) is a high spectral resolution grating spectrometer with 2378 bands in the thermal infrared between 3.7–15.4  $\mu\text{m}$  that is operational aboard the NASA EOS AQUA satellite (Chahine et al., 2006). In the cross-track direction, a  $\pm 49.5$  degree swath centered on the nadir is scanned. Each scan line contains 90 IR footprints, with a resolution of 13.5 km at nadir and  $41\text{ km} \times 21.4\text{ km}$  at the scan extremes from the nominal 705.3 km orbit. IASI is a Fourier Transform Spectrometer (Blumstein et al., 2004; Simeoni, 2007) observing the 3.7–15.5  $\mu\text{m}$  spectral range with a spectral sampling interval of  $0.25\text{ cm}^{-1}$ , while its scan mirror provides a spatial swath of  $\pm 48.3$  degrees perpendicular to the satellite track. For each scan position, the instrument views about 3.3 degrees  $\times$  3.3 degrees, or  $50\text{ km} \times 50\text{ km}$  at nadir, with a  $2 \times 2$  array of detectors to yield a 12 km nadir footprint per IFOV pixel. Broadband comparisons are also included using imager data from the MODIS sensor on AQUA and the IASI infrared imager on Metop-A. The Moderate Resolution Imaging Spectroradiometer (MODIS) is a broadband imaging sensor that provides high radiometric sensitivity in 36 spectral bands ranging in wavelength from  $0.4\text{ }\mu\text{m}$  to  $14.4\text{ }\mu\text{m}$ , with a nominal band-dependent nadir resolution less than or equal to 1 km (Xiong and Barnes, 2006; <http://modis.gsfc.nasa.gov/about/design.php>). The IASI instrument includes a built-in imager, the IASI infrared imager, to enable accurate collocation between IASI and other Metop sensors as well as to provide subIASI-pixel cloud information. The imager cov-

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



ers the IASI field-of-view with  $64 \times 64$  pixels providing sub-kilometer spatial resolution at nadir and has a single channel in the infrared over the 10.3 to 12.5 micron region (Blumstein et al., 2004; [http://smsc.cnes.fr/IASI/GP\\_instrument.htm](http://smsc.cnes.fr/IASI/GP_instrument.htm)).

### 3 Validation methodology and assessment approach

- 5 The airborne-field-campaign-centric calibration/validation (Cal/Val) strategy employed by the LaRC NAST-I team is illustrated in Fig. 3. While focused about high-resolution infrared FTS measurements (i.e., NAST-I), the strategy infuses other remote and in-situ sensors on same and different aircraft, data from other sensors on same and different spacecraft, data from ground-sites (e.g., DOE ARM CART), and geophysical model fields (e.g., Numerical Weather Prediction, NWP). NAST-I is typically flown jointly with the S-HIS. This provides redundancy for the critical infrared spectral radiance measurement, helps characterize intra-platform uncertainties amongst the airborne interferometers, and enables a better linkage to reference calibration standards; the UW SSEC has done extensive calibration testing of both NAST-I and S-HIS with blackbody sources having SI traceability to the National Institute of Standards and Technology (NIST) (Best et al., 2003; Revercomb et al., 2006). Analysis is further benefited from the independent set of algorithms employed by LaRC associated with, e.g., fast radiative transfer modeling and geophysical product retrievals, to enable an independent assessment of derived level-2 products. This approach enables independent (SI-traceable) measurement system validation, and enables long-term monitoring and inter-satellite cross-validation of measurement systems by underflight of multiple satellites during multiple field campaigns.

25 Spectral radiance validation, i.e. Cal/Val of sensor and level-1 algorithms, is a fundamental first-step prior to assessing derived geophysical parameter quality. Space and time co-location is critical for this task when the scenes being inter-compared contain significant non-uniformities. Radiosondes are frequently used for point reference comparisons and to provide statistics from the usage of large sample sizes. How-

### IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



ever, besides of radiosonde dry-bias issues at upper altitudes, they cannot provide a “coincident” measurement due to the ascent time (1–2 h) and associated horizontal displacement (which can be >50 km). Lidar observations are much improved for accuracy and instant-time sampling, but these can only provide point measurements and still introduce forward modeling errors when producing “upwelling radiance”. Airborne assets provide the only means for directly comparing radiance, providing the best match to spacecraft data, and can be implemented anywhere unlike fixed ground sites.

The objective of the analysis herein is to infuse multiple spatially- and temporally-coincident data sources from several independent sensors and simulations for enabling inter-comparison and assessment of high-resolution infrared spectral radiance measurements from IASI and the other coincident sensors. Simulated observations are based upon line-by-line (LBL)-based radiative transfer model (LBLRTM) (Clough et al., 2005) calculations using the best available estimate of surface and atmospheric state. Airborne FTS sensors, such as the NAST-I, serve as ideal validation sensors due to their higher spatial and spectral resolution (same-scene) measurements which can then be degraded to best emulate that observed by the coincident satellite sensors.

### 3.1 Analysis approach

The goal of this case study is to assess IASI spectral radiances standalone and relative to AIRS. Methods employed herein to address this include comparisons of measured IASI radiances with simulations and other measurements. Simulations presented use the best available estimate for atmospheric state (from, e.g., NWP model fields, radiosondes, or independent retrievals). Other measurements used in the comparisons fit within two basic categories: those on the same platform (i.e., intra-platform) and comparison of measurements from different platforms (i.e., inter-platform). Since the airborne interferometer measurements provide the best characterization of scene evolution (as will be shown in the Inter-comparison Results section of this manuscript) these data will also be used as a calibration reference standard to remove scene evolution for a more-representative IASI versus AIRS comparison. This approach can

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



be summarized as follows:

1. *Comparisons with simulations.* Spectral radiances from select IASI IFOVs  
5 are first compared with line-by-line radiative transfer model simulations using esti-  
mates of atmospheric state derived from NWP model fields (i.e. European Center for  
Medium-range Weather Forecasting, ECMWF, Gibson et al., 1997), local radiosonde  
observations, and independently-derived retrievals (Zhou et al., 2002, 2005, 2007b).

10 2. *Intra-platform comparisons.* Radiance measurements from each available  
platform are compared with consistent measurements from the same platform. This  
consists of comparing the following spectrally- and spatially-consistent observations:  
IASI versus IASI imager (on MetOP-A), AIRS versus MODIS (on AQUA), and NAST-I  
versus S-HIS (on WB-57). This enables a platform self-consistency verification  
15 while having large sample size comparisons with negligible collocation and viewing  
geometry errors (i.e., temporal, spatial, angular, and platform altitude).

20 3. *Inter-platform comparisons.* High spectral resolution radiance measurements  
are compared with like observations from a different platform. This enables comparing  
new sensors, such as IASI, to known, previously-validated assets (such as NAST-I,  
S-HIS, and AIRS). For scene observations that are not temporally-coincident, a ref-  
erence calibration standard is desirable to account for scene evolution. The following  
inter-platform comparisons are included:

- 25 a) *Direct IASI vs. AIRS comparisons.* As a first-order comparison, spatially-  
coincident latitudinal cross-sections from IASI are compared with similar obser-  
vations from AIRS.
- b) *Aircraft vs. spacecraft.* NAST-I spectral radiances are compared with spatially-  
and temporally-coincident observations from both IASI and AIRS.
- c) *Indirect IASI vs. AIRS comparisons.* Since NAST-I observes the scene evolution

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



between the Metop-A and AQUA overpasses during the case study JAIVEx flight day, these observations are used as a calibration reference standard to remove scene evolution and enable indirect cross-validation comparisons between IASI and AIRS.

## 5 4 Inter-comparison results

Spectral radiance inter-comparison is a fundamental first-step prior to assessing derived geophysical parameter quality. As detailed in the last section, the goal of this case study is to assess IASI spectral radiances standalone and relative to AIRS through comparisons of measured IASI radiances with simulations and other 10 measurements selected from the JAIVEx case study day. The figures shown in this section illustrate some example infrared spectral radiance validation results. The inter-comparison results are presented as outlined in the comparison approach detailed within the last section of this manuscript.

15 1. *Comparisons with simulations.* Figure 4 shows example simulations for an IASI measured spectrum of a select IFOV within the case study day Metop-A overpass. Figure 4a illustrates the selected IFOV relative to the sub-satellite track, which is an arbitrarily-selected radiosonde location (i.e., FFC, near Atlanta, GA). Figure 4b shows the IASI measured spectrum along with four simulation results using different 20 estimates to represent the atmospheric state. Specifically, in order of increasing ability to match this specific IASI measurement, simulations utilize the 1976 Standard Atmosphere (Krueger and Minzner, 1976) ( $-12\text{ K}$ ), ECMWF ( $-3.6\text{ K}$ ), radiosonde ( $0.99\text{ K}$ ), and an independent IASI retrieval ( $0.21\text{ K}$ ); the parenthetical values represent the mean (IASI-simulation) differences across the  $1540\text{--}1610\text{ cm}^{-1}$  spectral region 25 shown. The relative goodness of these simulations is in the expected order, i.e. they get better as one goes from models to measurements of closer space and time coincidence. It is interesting to point out that while the retrieved atmospheric state

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



was produced from this specific IASI spectrum, it does not yield perfect results in this comparison since an independent atmospheric stratification and radiative transfer model have been implemented; this example is included to illustrate the point that even assuming a perfectly-known atmospheric state, the forward model errors can still be  
5 on the order of a couple tenths of a degree K. This figure serves to demonstrate that results from simulations are not close enough for advanced sounder validation since they are limited by knowledge of atmospheric state and forward modeling differences.

2. *Intra-platform comparisons.* Intra-platform comparisons for IASI and AIRS  
10 are limited to comparisons with broadband imagers having lower requirements for radiometric and spectral resolutions and calibration. While this limits their ability to validate spectral radiance stand-alone, they are certainly very important components to and of value for validation. Figure 5 illustrates a comparison of IASI versus the IASI imager for the JAIVEEx flight region scene. Figure 5a shows the imager data degraded  
15 to IASI spatial resolution over the IASI scene region while Fig. 5b has IASI spectrally degraded through application of the IASI imager spectral response function, making the comparison of Fig. 5a to b spatially- and spectrally-consistent. Figure 5c uses a histogram to depict the differences between the scenes in Fig. 5a–b. The mode of this distribution is 0.23 K, which is quite close considering the uncertainties involved  
20 in this comparison. The outliers in this distribution are mainly due to heterogeneous regions of the scene (e.g. clouds) which are most sensitive to spatial errors in the IFOV matchups between IASI and the IASI imager. Figure 6 shows the same type of comparison as in Fig. 5 but represents AIRS versus MODIS band 31 (MB31, 11 micron window region) for the JAIVEEx flight region scene. Figure 6a shows the MODIS data  
25 degraded to AIRS spatial resolution over the AIRS scene region while Fig. 6b has AIRS spectrally degraded through application of the MB31 spectral response function, making the comparison of Fig. 6a to b spatially- and spectrally-consistent. Figure 6c uses a histogram to depict the differences between the scenes in Fig. 6a–b. The mode of this distribution is –0.12 K which, as in the last example, is quite close considering

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

the uncertainties involved in this type of comparison.

Intra-platform comparison among the WB-57 airborne sensors enables comparison of the high spectral resolution interferometer instruments NAST-I and S-HIS. Figure 7 shows a comparison of NAST-I versus S-HIS for average spectra from collocated scenes during the 29 April 2007 JAIVEx flight mission for the (a) longwave window ( $880\text{--}980\text{ cm}^{-1}$ ), (b) midwave ( $1250\text{--}1450\text{ cm}^{-1}$ ), and (c) shortwave window ( $2385\text{--}2530\text{ cm}^{-1}$ ) spectral regions. Mean differences of these spectra are shown to be  $-0.03\text{ K}$ ,  $-0.02\text{ K}$ , and  $0.04\text{ K}$  for these spectral regions, respectively. The higher-resolution NAST-I data have been reduced to the S-HIS spectral resolution for a spectrally-consistent comparison. Figure 8 shows a scatter plot of NAST-I versus S-HIS for the average spectra shown in Fig. 7. A  $10\text{ cm}^{-1}$  boxcar smoothing has first been applied to the spectra to better facilitate radiometric calibration inter-comparison. As indicated in the figure, the  $800\text{--}1010\text{ cm}^{-1}$ ,  $1215\text{--}1615\text{ cm}^{-1}$ , and  $2385\text{--}2600\text{ cm}^{-1}$  spectral regions have been included and show mean differences on the order of hundredths of a degree K; this provides a consistency check of NAST-I relative to S-HIS for larger spectral extents than are used in later examples comparing NAST-I to IASI and AIRS.

### 3. Inter-platform comparisons.

a) *Direct IASI vs. AIRS comparisons.* Figure 9 shows nadir and common cross-section lines extracted in the next example for a first-order direct comparison of IASI and AIRS, and extend  $\pm 5$  degrees in latitude from the sub-satellite intersection point of the satellite ground tracks for a) IASI and b) AIRS. Tracks are shown on top of platform imager scenes, i.e., IASI imager and MODIS (MB31), respectively. Figure 10 shows water vapor band ( $1540\text{--}1610\text{ cm}^{-1}$ ) latitudinal cross-sections (deviation from brightness temperature mean, K) along the sub-satellite nadir for a) IASI, b) AIRS, and along a common cross-section for c) IASI and d) AIRS. The nadir cross-sections have a point-in-space coincidence, and the common cross-sections have a line-in-space coincidence; however, temporal coincidence is shown to be more important since

the different cross-sections from each sensor seem to more resemble each other than the corresponding cross-sections from the other sensor (that are not temporally coincident). The importance of time coincidence in comparisons involving an evolving geophysical field is also illustrated in the next example. Figure 11 shows another direct comparison of IASI and AIRS coincident IFOVs within the JAIVEx 29 April 2007 flight domain. Select MODIS spectral response functions have been applied to illustrate scene evolution (between satellite overpasses) from a broadband perspective. Long-wave window (MB31) and midwave water vapor (MB27) regions are shown in the top and bottom plots, respectively. The goal was to find IFOVs with a minimum of scene evolution since any direct comparison of instruments will include both instrument differences and scene changes. In this example, out of the 374 IFOVs that overlap spatially in the JAIVEx “study region” only 2 can be found to satisfy a close match; i.e.  $\sim 0.5\%$  of the scenes produce a difference of  $\sim 0.75$  K, band averaged, which is still larger than desired for validation. The last two examples illustrate that, unlike the simultaneous nadir observation (SNO) comparisons possible in polar regions (see, e.g., Cao et al., 2005), such direct satellite-to-satellite comparisons in lower latitude regions (where significant time can exist between overpasses) can contain significant scene evolution differences making them difficult to utilize for detecting small instrument differences in Cal/Val.

b) *Aircraft vs. spacecraft.* Space and time collocation is critical for the validation task when the scenes being inter-compared contain significant non-uniformity in the spatial and temporal domains, respectively. Airborne FTS assets, such as the NAST-I and S-HIS, are uniquely able to provide such collocation and enable the best overall direct radiance inter-comparisons. The comparisons shown in this section are all for single spacecraft sensor IFOVs relative to combined near-nadir NAST-I observations coincident in space and time. Since NAST-I is of higher spectral resolution than the spacecraft sensors, an additional curve (in blue) is added in the plots to enable same-spectral resolution comparisons. Figure 12 shows example

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



infrared spectral radiance inter-comparisons for a longwave window ( $880\text{--}980\text{ cm}^{-1}$ ) spectral interval between select space and time coincident NAST-I observations relative to a) IASI and b) AIRS measurements. Mean differences over this spectral interval are shown to be 0.13 K and 0.11 K for (NAST-I – IASI) and (NAST-I – AIRS), respectively. A similar comparison for a midwave ( $1540\text{--}1610\text{ cm}^{-1}$ ) spectral interval is shown in Fig. 13. This example uses different IFOVs to show comparisons to such levels are not outlier occurrences and, as with the last example, space and time coincident NAST-I observations are shown relative to a) IASI and b) AIRS measurements. Mean differences over this spectral interval are shown to be 0.08 K and 0.11 K for (NAST-I – IASI) and (NAST-I – AIRS), respectively. The shortwave window region is also included with a comparison of the  $2390\text{--}2490\text{ cm}^{-1}$  spectral interval shown in Fig. 14. Once again, different space and time coincident IFOVs have been selected to compare NAST-I observations relative to a) IASI and b) AIRS measurements. Mean differences over this spectral interval are shown to be 0.10 K and 0.05 K for (NAST-I – IASI) and (NAST-I – AIRS), respectively. The airborne FTS versus spacecraft sensor comparisons included in this section show IASI and AIRS spectral radiances both matching coincident NAST-I observations to within  $\sim 0.1$  K (band-averaged). Such inter-comparisons yield the closest levels of direct radiance comparisons and verification to these levels is hard to achieve using other approaches.

c) *Indirect IASI vs. AIRS comparisons.* The remaining figures in this section are focused on enabling an indirect radiometric comparison of IASI and AIRS utilizing NAST-I observations, covering the time in between Metop-A (IASI) and AQUA (AIRS) overpasses, to remove differences due to scene evolution. Figure 15 illustrates the sampling logistics for the next example, showing select NAST-I nadir tracks relative to sub-satellite tracks for a) IASI and b) AIRS which are used for data cross-section extraction. Figure 16 shows water vapor band ( $1540\text{--}1610\text{ cm}^{-1}$ ) spectral radiance latitudinal cross-sections for a) NAST-I at the IASI over pass time, b) IASI, c) NAST-I at the AIRS overpass time, and d) AIRS. Note that the NAST-I observations are

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



degraded both spectrally and spatially to more-appropriately compare with IASI and AIRS in this example. As can be seen in this figure, space and time coincident NAST-I provides a better match to IASI observations than space-only coincident AIRS (i.e., a best matches b), and to AIRS observations than space-only coincident IASI (i.e., c best matches d) , further demonstrating the potential for inter-satellite cross-validation using such airborne sensors.

The next figure summarizes the sampling logistics to be used for comparing IASI versus AIRS via NAST-I. Specifically, Fig. 17 illustrates the nadir tracks of IASI, AIRS, and NAST-I superimposed over the IASI imager scene of the JAIVEx case study day 5 flight region. Figure 18 shows the latitudinal variability of the geophysical field scene as will be observed in the aircraft/spacecraft measurement comparison. In this figure, sub-AIRS-pixel MODIS data (MB31) are used to represent scene characteristics within AIRS IFOV positions and for estimating view- and sampling-induced differences relative to subsequent comparisons with NAST-I. Time varying NAST-I spatial positions are 10 used to achieve spatial coincidence with the AIRS/MODIS scene, albeit at the fixed-in-time AQUA overpass. A similar spatial character in field variability is also inferred using the IASI/imager scene from the Metop overpass, implying a consistent message that 15 this type of comparison (on this case study day) will have a periodic/latitudinal oscillation superimposed due to the aircraft flight profile and relative sampling differences compared with the spacecraft sensors.

Figure 19 shows a time series representation of a) NAST-I – IASI and b) NAST-I – AIRS for a longwave spectral interval ( $880\text{--}980\text{ cm}^{-1}$ ). As with the last figure, space coincidence is achieved for each comparison point whereas time coincidence is only achieved at satellite overpass times. The red symbols indicate, after the filtering of 20 outliers due to gross scene sampling differences, the time series differences of NAST-I – IASI in a) and NAST-I – AIRS in b), the blue lines represent linear fits to the red symbols, and the vertical black lines correspond to satellite overpass times as indicated. We can then calculate a residual difference between IASI and AIRS by performing a double-difference including the NAST-I observations coincident in space and time with

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



each satellites overpass, specifically:

$$(NAST-I - AIRS)|_{AOT} - (NAST-I - IASI)|_{IOT} \sim (IASI - AIRS), \quad (1)$$

where AOT and IOT are the AIRS and IASI overpass times, respectively. Evaluation of Eq. (1) for this case using data derived from the linear fits (blue lines) yields a difference

- 5 between these spaceborne sensors of less than 0.05 K for this spectral interval, specifically, IASI-AIRS=0.049 K. Other approaches for evaluating this double-difference, e.g. using local means or least-squares fits, have also been tried and yield similar results. It should be noted that there is also some justification for using a linear fit based upon the relationships observable in Fig. 19, i.e. aside from the sampling-induced cyclic  
10 latitudinal behavior previously discussed, the scene evolution trend is fairly linear for this longwave window spectral interval; a more sophisticated fitting approach may be necessary to adequately represent the character observed in other spectral regions (e.g. water vapor band), as is currently under investigation for future reporting. This radiometric difference between IASI and AIRS is similar to that inferred by other ap-  
15 proaches (i.e., which reported agreement between IASI and AIRS to better than 0.1 K) using SNO analysis in polar regions or NWP model fields for removing scene evolution in other regions (Strömgren et al., 2008), however, this airborne-centric approach is not limited to application in polar regions and does not have the potential for bias by the NWP model field assimilated sensors. These examples demonstrate the utility of  
20 airborne FTS sensors, such as the NAST-I and S-HIS, to serve as reference calibration standards for enabling inter-satellite cross-validation.

## 5 Summary and conclusions

This manuscript has stressed the importance of post-launch validation activities employing airborne field campaigns to verify the quality of satellite measurement systems. Data from the JAIVEx field campaign have been shown to be very useful for IASI and AIRS validation and are serving to further refine methodologies for future

### IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



advanced sounder validation associated with, for example, the Cross-track Infrared Sounder (CrIS) to fly on the NPOESS Preparatory Project (NPP) and NPOESS.

It has been demonstrated that high-altitude, airborne FTS systems such as the NAST-I and S-HIS play a vital role in assessing radiometric and spectral fidelity of spaceborne observations, since they provide the best means of comparison with spatially- and temporally-coincident SI-traceable measurements. Comparisons with simulations are limited by knowledge of atmospheric state and forward model uncertainties, and such forward model error can easily exceed acceptable values for radiance comparisons, or that achievable using airborne sensors. Without the benefit of coincident airborne assets, attempts to do direct radiance validation through measurement-to-measurement comparisons (i.e., independent of forward radiative transfer modeling uncertainties) would be limited to intra- and inter-satellite comparisons. For this case study, direct comparisons of IASI versus AIRS correspond to comparing measurements from overpasses separated by about 3.5 h. Even restricting comparisons to those scenes with minimum evolution, the existing scene evolution is still too large and inhibits inferring instrument differences. Intra-platform comparisons are limited to sensors collocated on same platform, so for IASI and AIRS such comparisons are restricted to those with broadband imagers having lower requirements for radiometric and spectral resolutions and calibration. While this limits their ability to validate spectral radiance stand-alone, they are still certainly very important components to and of value for validation by providing platform self-consistency verification with large sample size comparisons having negligible collocation and viewing geometry errors. Alternatively, airborne FTS versus spacecraft sensor comparisons have shown IASI and AIRS spectral radiances both matching coincident NAST-I observations to within ~0.1 K (band-averaged). Such inter-comparisons yield the closest levels of direct radiance comparisons and verification to these levels is hard to achieve using other approaches. The airborne FTS measurements coincident with multiple satellite platforms have also been shown to have potential for serving as calibration reference standards for enabling cross-validation, as coincident NAST-I observations have demonstrated

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

longwave band differences between IASI and AIRS on the order of less than 0.05 K. Therefore continuation of aircraft under-flights for multiple satellites during multiple field campaigns can enable long-term monitoring of system performance and inter-satellite cross-validation.

- 5 The case study examined herein can be analyzed in further detail, bringing in more independent measurements from the other in-situ and remote sensors that also participated in the JAIVEx field campaign. Further examination of data from other flight days not presented herein will also be part of this continued analysis.

*Acknowledgements.* The authors wish to acknowledge the NASA Langley Research Center,

- 10 NASA SMD, NPOESS Integrated Program Office, and the various team members and their respective institutions for their continued, enabling support of the NAST program. The authors greatly appreciate the contributions from members of the NAST instrument and JAIVEx field campaign teams for making JAIVEx and this work possible. The FAAM is jointly funded by the UK Met Office and the Natural Environment Research Council. IASI has been developed  
15 and built under the responsibility of the Centre National d'Etudes Spatiales (CNES). It is flown onboard the Metop satellites as part of the EUMETSAT Polar System. The IASI L1 data are received through the Unified Meteorological Archival and Retrieval Facility (UMARF) of EU-METSAT.

## References

- 20 Aumann, H. H., Chahine, M. T. Gautier, C., Goldberg, M. D., Kalnay, E., McMillin, L. M., Revercomb, H., Rosenkranz, P. W., Smith, W. L., Staelin, D. H., Strömgren, L., and Susskind, J.: AIRS/AMSU/HSB on the AQUA mission: design, science objective, data products, and processing systems, IEEE T. Geosci. Remote , 41, 253–264, 2003.
- 25 Best, F. A., Revercomb, H. E., Knuteson, R. O., Tobin, D. C., Dedecker, R. G., Dirkx, T. P., Mulligan, M. P., Ciganovich, N. N., and Te, Y.: Traceability of Absolute Radiometric Calibration for the Atmospheric Emitted Radiance Interferometer (AERI), Conference on Characterization and Radiometric Calibration for Remote Sensing, Utah State University Space Dynamics Laboratory, Logan, UT, USA, 2003.

---

## IASI spectral radiance performance validation

A. M. Larar et al.

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Blumstein, D., Chalon, G., Carlier, T., Buil, C., Hebert, P., Maciaszek, T., Ponce, G., and Phulpin, T.: IASI instrument: technical overview and measured performances, SPIE Proc., 5543, 196–207, 2004.

Cao, C., Weng, F., Goldberg, M., Wu, X., Xu, H., and Ciren, P.: Intersatellite calibration of polar-orbiting radiometers using the SNO/SCO method, Geoscience and Remote Sensing Symposium, IGARSS Proceedings, 2005 IEEE International, 1, 109–112, doi:10.1109/IGARSS.2005.1526116, 2005.

Carissimo, A., Grieco, G., Serio, C., Cuomo, V., Masiello, G., and Smith, W. L.: Application of s-IASI to NAST-I, Proceedings of the International Radiation Symposium, IRS 2004: Current Problems in Atmospheric Radiation, edited by: Fischer, H. and Sohn, B., A. Deepak publishing, ISBN 978-0-937194-48-5, 247–250, 2006.

Chahine, C., Pagano, T. S., Aumann, H. H., Atlas, R., Barnet, C., Blaisdell, J., Chen, L., Divakarla, M., Fetzer, E. J., Goldberg, M., Gautier, C., Granger, S., Hannon, S., Irion, F. W., Kakar, R., Kalnay, E., Lambrigtsen, B. H., Lee, S.-Y., Le Marshall, J., McMillan, W. W., McMillin, L., Olsen, E. T., Revercomb, H., Rosenkranz, P., Smith, W. L., Staelin, D., Strow, L. L., Susskind, J., Tobin, D., Wolf, W., and Zhou, L.: AIRS: improving weather forecasting and providing new insights into climate, *B. Am. Meteorol. Soc.*, 87, 911–926, 2006.

Chalon, G., Cayla, F., and Diebel, D.: IASI: An Advanced Sounder for Operational Meteorology, Proceedings of the 52nd Congress of IAF, Toulouse, France, 1–5 October 2001.

Clough, S. A., Shephard, M. W., Mlawer, E. J., Delamere, J. S., Iacono, M. J., Cady-Pereira, K., Boukabara, S., and Brown, P. D.: Atmospheric radiative transfer modeling: a summary of the AER codes, *Short Communication, J. Quant. Spectrosc. Ra.*, 91, 233–244, 2005.

Cousins, D. and Smith, W. L.: National Polar-Orbiting Operational Environmental Satellite System (NPOESS) Airborne Sounder Testbed-Interferometer (NAST-I), SPIE Proc., 3127, 323–331, 1997.

Gazarik, M., Candell, L., Leonard, E., and Prutzer, S.: NPOESS airborne sounder testbed interferometer (NAST-I) signal processing and initial flight test results, SPIE Proc., *Earth Observing Systems-III*, 3439, 503–514, 1998.

Gibson, J. K., Källberg, P., Uppala, S., Hernandez, A., Nomura, A., and Serrano, E.: ERA Description. Re-Analysis (ERA) Project Report Series 1, ECMWF, Shinfield Park, Reading, July 1997.

Grieco, G., Masiello, G., Matricardi, M., Serio, C., Summa, D., and Cuomo, V.: Demonstration and validation of the s-IASI inversion scheme with NAST-I data, *Q. J. Roy. Meteorol. Soc.*,

- Krueger, A. J. and Minzner, R. A.: A Mid-Latitude Ozone Model for the 1976 U.S. Standard Atmosphere, *J. Geophys. Res.*, 81(24), 4477–4481, 1976.
- Larar, A. M., Smith, W. L., Zhou, D. K., and Mango, S.: Validation Studies Using NAST-I Measurements From Recent Field Campaigns, *Proc. SPIE, Optical Spectroscopic Techniques and Instrumentation for Atmospheric and Space Research V*, 5157, 23–33, 2003.
- Larar, A. M., Smith, W. L., Zhou, D. K., Liu, X., Revercomb, H., Knuteson, R., and Mango, S.: Infrared Radiance Validation Using Aircraft- and Satellite-based Sensor systems, *Proceedings of IRS 2004: Current Problems in Atmospheric Radiation*, A. Deepak Publishing, Hampton, Virginia, USA, 2005.
- Larar, A. M., Zhou, D. K., Liu, X., Smith, W. L., Revercomb, H. E., Taylor, J. P., Newman, S., Schlüssel, P., and Mango, S. A.: IASI Validation Studies using Airborne Field Campaign Data, *The 16th International TOVS Study Conference*, Angra dos Reis, Brazil, 7–13 May, 2008a.
- Larar A. M., Zhou, D. K., Liu, X., and Smith, W. L.: Select Methodology for Validating Advanced Satellite Measurement Systems, *Proceedings of the International Radiation Symposium (IRS2008)*, Foz do Iguaçu, Brazil, 3–8 August, 2008b.
- Liu, X., Zhou, D. K., Larar, A. M., Smith Sr., W. L., and Mango, S. A.: Case-study of a principal-component-based radiative transfer forward model and retrieval algorithm using EAQUATE data, *Q. J. Roy. Meteorol. Soc.*, 133(S3), 243–256, 2007.
- Liu, X., Zhou, D. K., Larar, A. M., Smith, W. L., Schluessel, P., Newman, S. M., Taylor, J. P., and Wu, W.: Retrieval of atmospheric profiles and cloud properties from IASI spectra using super-channels, *Atmos. Chem. Phys. Discuss.*, 9, 8683–8736, 2009, <http://www.atmos-chem-phys-discuss.net/9/8683/2009/>.
- Newman, S. M., Knuteson, R. O., Zhou, D. K., Larar, A. M., Smith, W. L., and Taylor, J. P.: Radiative transfer validation study from the European Aqua Thermodynamic Experiment, *Q. J. Roy. Meteorol. Soc.*, 135, 277–290, doi:10.1002/qj.382, 2009.
- Pagano, T. S., Aumann, H. H., Hagan, D. E., and Overoye, K.: Prelaunch and in-flight radiometric calibration of the Atmospheric Infrared Sounder (AIRS), *IEEE T. Geosci. Remote*, 41, 265–273, 2003.
- Putzter, S., Ryan-Howard, D. P., Garcia, J. G., and Bold, D. R.: NPOESS Airborne Sounder Testbed (NAST) IR Spectrometer Design, *Proceedings of the IEEE Aerospace Conference*, Snowmass, CA, USA, 1998.

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



- Revercomb, H. E., Walden, V. P., Tobin, D. C., Anderson, J., Best, F. A., Ciganovich, N. C., Dedecker, R. G., Dirkx, T., Ellington, S. C., Garcia, R. K., Herbsleb, R., Knuteson, R. O., LaPorte, D., McRae, D., and Werner, M.: Recent Results From Two New Aircraft-Based Fourier-Transform Interferometers: The Scanning High-resolution Interferometer Sounder and the NPOESS Atmospheric Sounder Testbed Interferometer, ASSFTS Conference, Toulouse, France, October 1998.
- Revercomb, H. E., Tobin, D. C., Knuteson, R. O., Best, F. A., Smith, W. L., van Delst, P., LaPorte, D. D., Ellington, S. D., Werner, M. W., Dedecker, R. G., Garcia, R. K., Ciganovich, N. K., Howell, H. B., Dutcher, S., and Taylor, J. K.: Validation of Atmospheric InfraRed Sounder (AIRS) spectral radiances with the Scanning High-resolution Interferometer Sounder (S-HIS) aircraft instrument, International TOVS Study Conference, 13th, Sainte-Adele, Quebec, Canada, 29 October–4 November 2003 (proceedings).
- Revercomb, H. E., Anderson, J. G., Best, F. A., Tobin, D. C., Knuteson, R. O., LaPorte, D. D., and Taylor, J. K.: Infrared calibration for climate: A perspective on present and future high spectral resolution instruments, Multispectral, Hyperspectral, and Ultraspectral Remote Sensing Technology, Techniques, and Applications, Gao, India, 13–16 November 2006.
- Serio, C., Masiello, G., Grieco, G., Carissimo, A., Di Girolamo, P., Suma, D., Rodriguez, A., Stuhlmann, R., and Tjemkes, S.: Potential of the MTG -IRS mission to resolve small scale variability of atmospheric humidity, Proceedings of the International Radiation Symposium, IRS 2008: Current Problems in Atmospheric Radiation (IRS 2008), edited by: Nakajima, T. and Yamasoe, M., American Institute of Physics Conference Proceedings, 331–334, 2009.
- Simeoni, D.: IASI: A Review of Instrument Performance and Characterizations, The Centre National d'Etudes Spatiales (CNES) and EUMETSAT IASI Conference, Anglet, France, 13–16 November, 2007.
- Smith, W., Larar, A., Zhou, D., Sisko, C., Li, J., Huang, B., Howell, H., Revercomb, H., Cousins, D., Gazarik, M., Mooney, D., and Mango, S.: NAST-I: Results from Revolutionary Aircraft Sounding Spectrometer, Proceedings from the SPIE Optical Spectroscopic Techniques and Instrumentation for Atmospheric and Space Research III, Conference, Denver, CO, USA, 3756, 1999.
- Smith, W., Larar, A., Taylor, J., Revercomb, H., Kireev, S., Zhou, D., Liu, X., Tobin, D., Newman, S., Schlüssel, P., Clough, A., Mango, S., and St. Germain, K.: Joint Airborne IASI Validation Experiment (JAIVEx) – An overview, Proc. Int. ATOVS Study Conf. XVI, Angra dos Reis, Brazil, CIMSS, University of Wisconsin-Madison, Angra dos Reis, Brazil, 7–13 May, 2008.

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



- Strow, L. L., Hannon, S. E., De-Souza Machado, S., Motteler, H. E., and Tobin, D. C.: Validation of the Atmospheric Infrared Sounder radiative transfer algorithm, *J. Geophys. Res.*, 111, D09S06, doi:10.1029/2005JD006146, 2006.
- Strow, L. L., Hannon, S., and Tobin, D.: IASI and AIRS validation and intercomparisons with SARTA, Advanced High Spectral Resolution Infrared Observations Workshop, EUMETSAT, Darmstadt, Germany, 15–17 September, 2008.
- Taylor, J. P., Smith, W. L., Cuomo, V., Larar, A. M., Zhou, D. K., Serio, C., Maestri, T., Rizzi, R., Newman, S., Antonelli, P., Mango, S., Di Girolamo, P., Esposito, F., Grieco, G., Summa, D., Restieri, R., Masiello, G., Romano, F., Pappalardo, G., Pavese, G., Mona, L., Amodeo, A., and Pisani, G.: EAQUATE – An international experiment for hyper-spectral atmospheric sounding validation, *B. Am. Meteorol. Soc.*, 89(2), 203–218, 2008.
- Tobin, D. C., Revercomb, H. E., Knuteson, R. O., Best, F. A., Smith, W. L., Ciganovich, N. N., Dedecker, R. G., Dutcher, S., Ellington, S. D., Garcia, R. K., Howell, H. B., LaPorte, D. D., Mango, S. A., Pagano, T. S., Taylor, J. K., van Delst, P., Vinson, K. H., and Werner, M. W.: Radiometric and spectral validation of Atmospheric Inf rared Sounder observations with the aircraft-based Scanning High-Resolution Interferometer Sounder, *J. Geophys. Res.*, 111, D09S02, doi:10.1029/2005JD006094, 2006.
- Xiong, X. and Barnes, W.: An overview of MODIS radiometric calibration and characterization, *Advances in Atmospheric Sciences*, 23(1), 69–79, 2006.
- Zhou, D. K., Smith, W. L., Li, J., Howell, H. B., Cantwell, G. W., Larar, A. M., Knuteson, R. O., Tobin, D. C., Revercomb, H. E., and Mango, S. A.: Thermodynamic product retrieval methodology for NAST-I and validation, *Appl. Optics*, 41, 6957–6967, 2002.
- Zhou, D. K., Smith, W. L., Liu, X., Larar, A. M., Huang, H.-L. A., Li, J., McGill, M. J., and Mango, S. A.: Thermodynamic and cloud parameters retrieval using infrared spectral data, *Geophys. Res. Lett.*, 32, L15805, doi:10.1029/2005GL023211, 2005.
- Zhou, D. K., Smith, W. L., Cuomo, V., Taylor, J. P., Barnet, C. D., Di Girolamo, P., Pappalardo, G., Larar, A. M., Liu, X., Newman, S. M., Lee, C., and Mango, S. A.: Retrieval validation during the European Aqua Thermodynamic Experiment, *Q. J. Roy. Meteorol. Soc.*, 133, 203–215, 2007a.
- Zhou, D. K., Smith Sr., W. L., Liu, X., Larar, A. M., Mango, S. A., and Huang, H.- L.: Physically retrieving cloud and thermodynamic parameters from ultraspectr al IR measurements, *J. Atmos. Sci.*, 64, 969–982, 2007b.
- Zhou, D. K., Smith, W. L., Larar, A. M., Liu, X., Taylor, J. P., Schlüssel, P., Strömgren, L. L., and

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



---

**IASI spectral  
radiance  
performance  
validation**

A. M. Larar et al.

---

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

|◀

▶|

◀

▶


[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

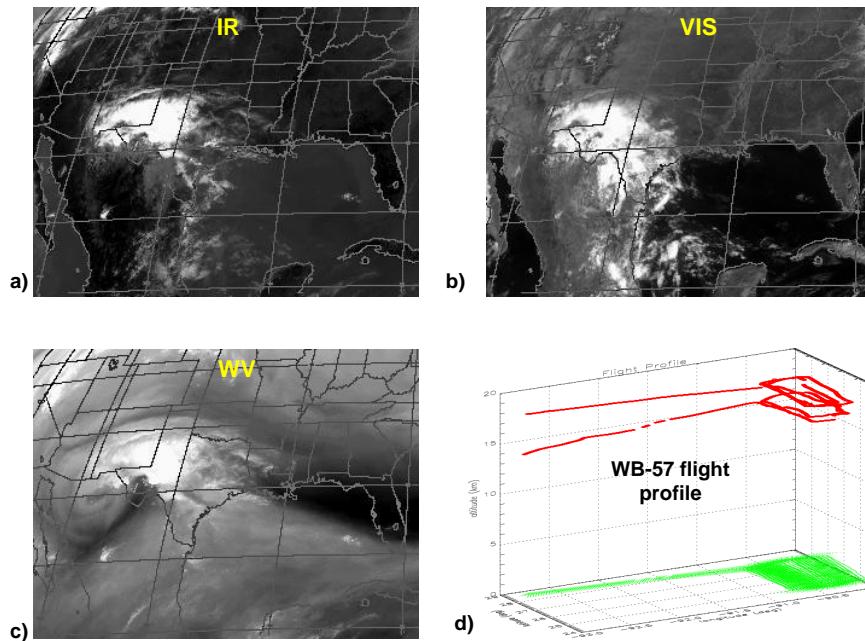

**Fig. 1.** JAIVEEx flight mission of 29 April 2007. The extended GOES imager scenes are shown for (a) infrared, (b) visible, and (c) water vapor bands, while the WB-57 oval racetrack flight pattern and NAST-I surface scan coverage within the north central Gulf of Mexico are shown in (d).

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

# IASI spectral radiance performance validation

A. M. Larar et al.

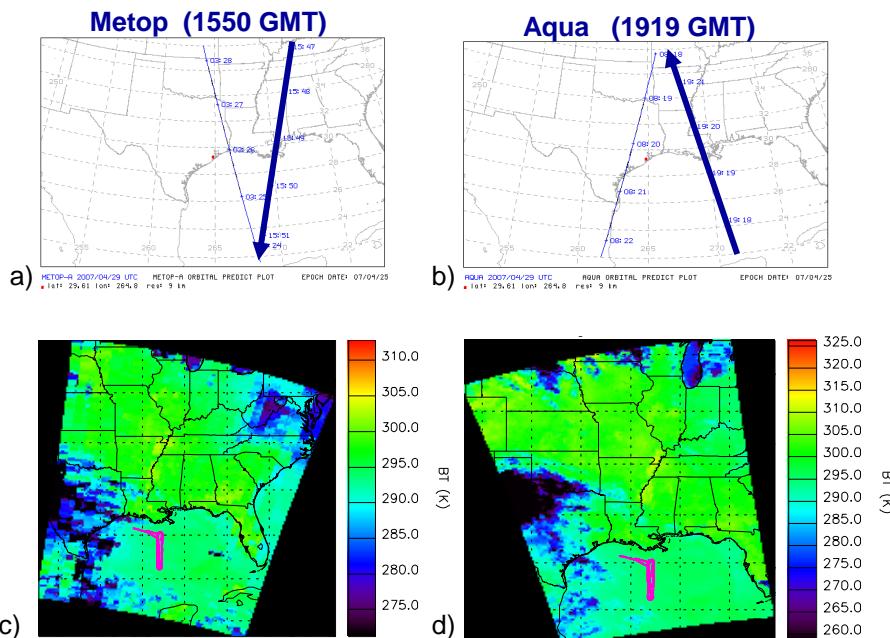

**Fig. 2.** JAIVEx flight mission of 29 April 2007. The sub-satellite tracks for Metop (IASI) and Aqua (AIRS) are shown in **(a)** and **(b)**, while the NAST-I nadir track (pink line) is shown within the IASI imager and Modis scenes in **(c)** and **(d)**, respectively.

Title Page

## Abstract

Introduction

## Conclusions

## References

Tables

## Figures



Back

Close


Full Screen / Esc

[Printer-friendly Version](#)

## Interactive Discussion

**IASI spectral  
radiance  
performance  
validation**

A. M. Larar et al.

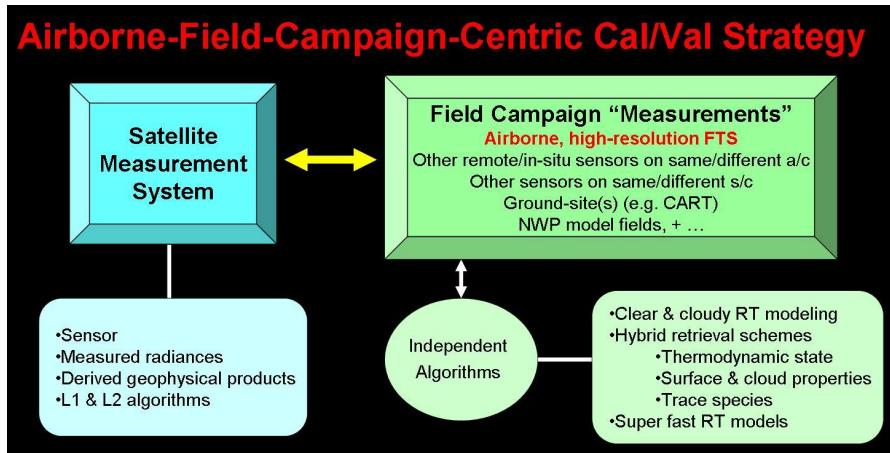


**Fig. 3.** Calibration/validation strategy employed by LaRC team for the conduct of NAST-I field experiments.



## IASI spectral radiance performance validation

A. M. Larar et al.

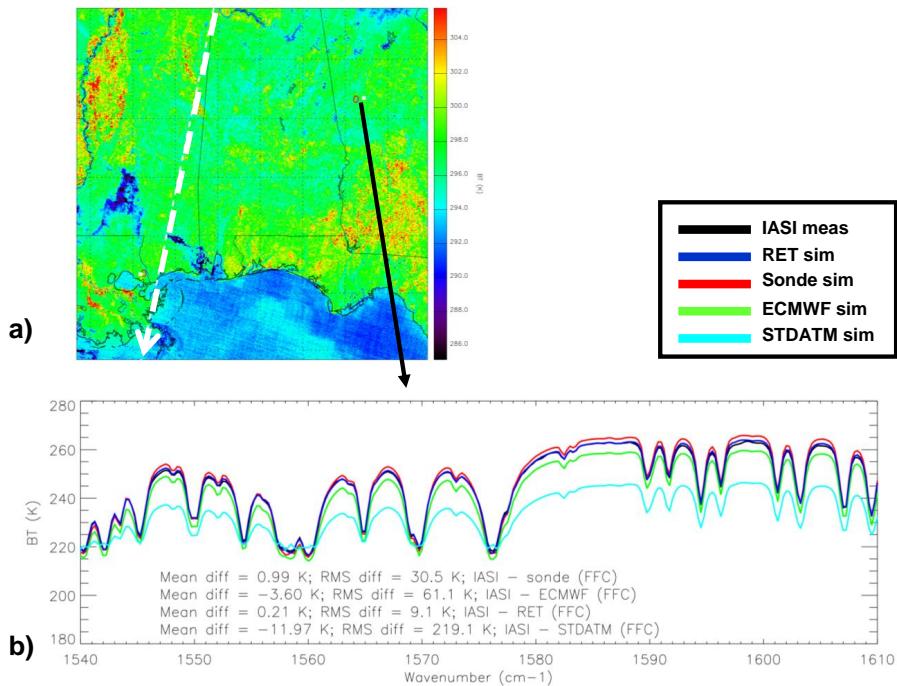

**Fig. 4.** IASI measured spectra versus simulation for a select IFOV on the 29 April 2007 JAIVEx region overpass at 15:50 GMT. Selected IFOV position shown within the IASI imager scene data in (a) along with the sub-satellite track (white-dashed arrow).

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

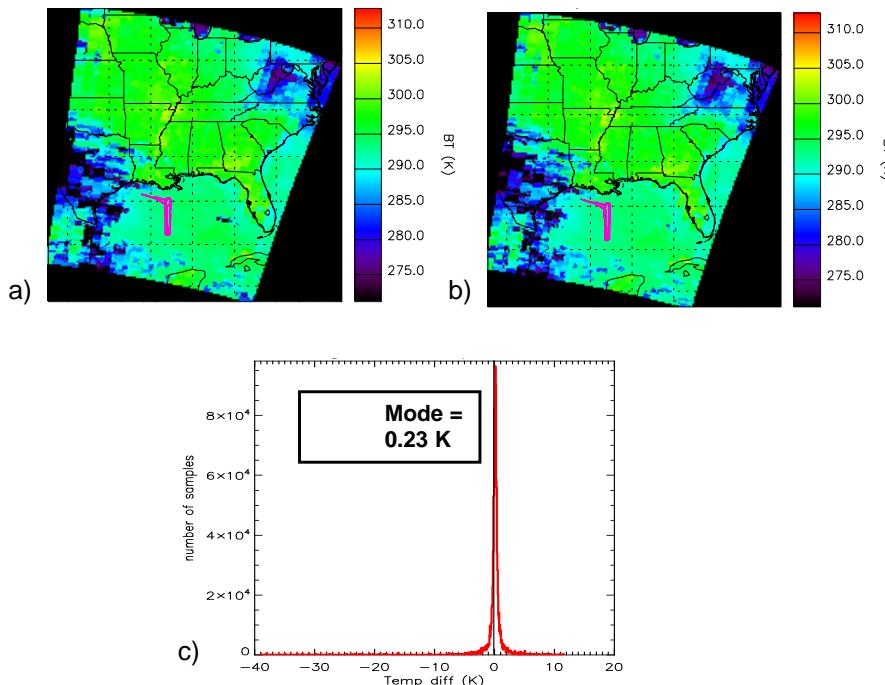


**Fig. 5.** IASI versus IASI imager for the Metop-A scene over the 29 April 2007 JAIVEx flight mission: **(a)** imager degraded to IASI spatial resolution over IASI scene, **(b)** IASI spectrally degraded through application of IASI imager spectral response function, and **(c)** histogram of scene (a) – scene (b).

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

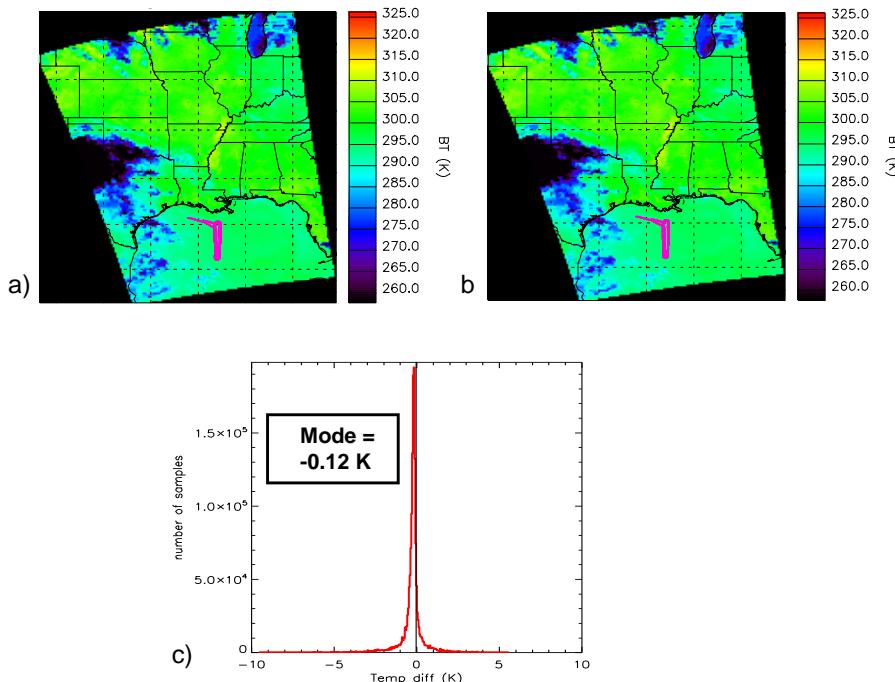


**Fig. 6.** AIRS versus Modis Band 31 (MB31) for the Aqua scene over the 29 April 2007 JAIVEx flight mission: **(a)** MB31 degraded to AIRS spatial resolution over AIRS scene, **(b)** AIRS spectrally degraded through application of MB31 spectral response function, and **(c)** histogram of scene (a) – scene (b).

<a href="#">Title Page</a>	
<a href="#">Abstract</a>	<a href="#">Introduction</a>
<a href="#">Conclusions</a>	<a href="#">References</a>
<a href="#">Tables</a>	<a href="#">Figures</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">◀</a>	<a href="#">▶</a>
<a href="#">Back</a>	<a href="#">Close</a>
<a href="#">Full Screen / Esc</a>	
<a href="#">Printer-friendly Version</a>	
<a href="#">Interactive Discussion</a>	

## IASI spectral radiance performance validation

A. M. Larar et al.

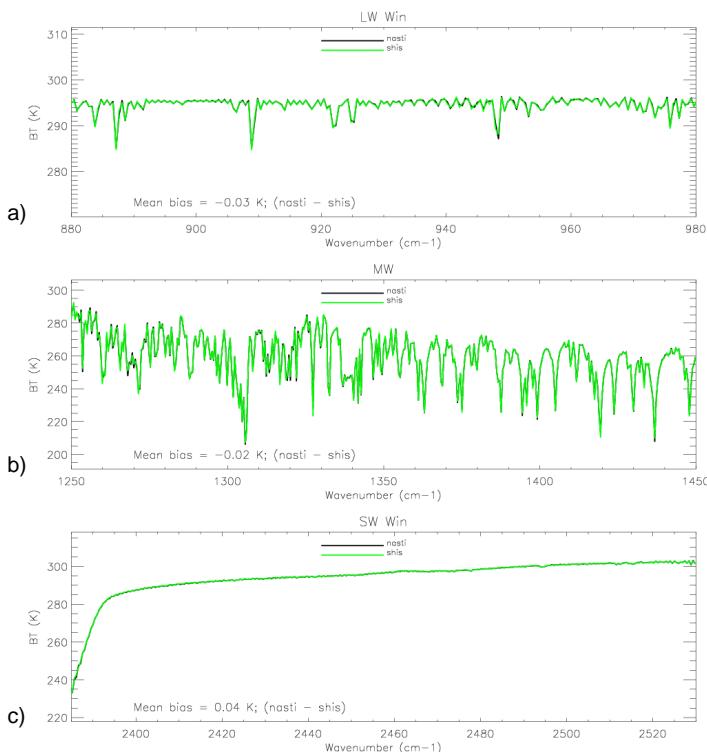


**Fig. 7.** Average NAST-I versus S-HIS spectra for collocated scenes during the 29 April 2007 JAIVEx flight mission, for the (a) longwave window ( $880\text{--}980\text{ cm}^{-1}$ ), (b) midwave ( $1250\text{--}1450\text{ cm}^{-1}$ ), and (c) shortwave window ( $2385\text{--}2530\text{ cm}^{-1}$ ) spectral regions. Note that the higher-resolution NAST-I data have been reduced to the S-HIS spectral resolution.

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)

**IASI spectral  
radiance  
performance  
validation**

A. M. Larar et al.

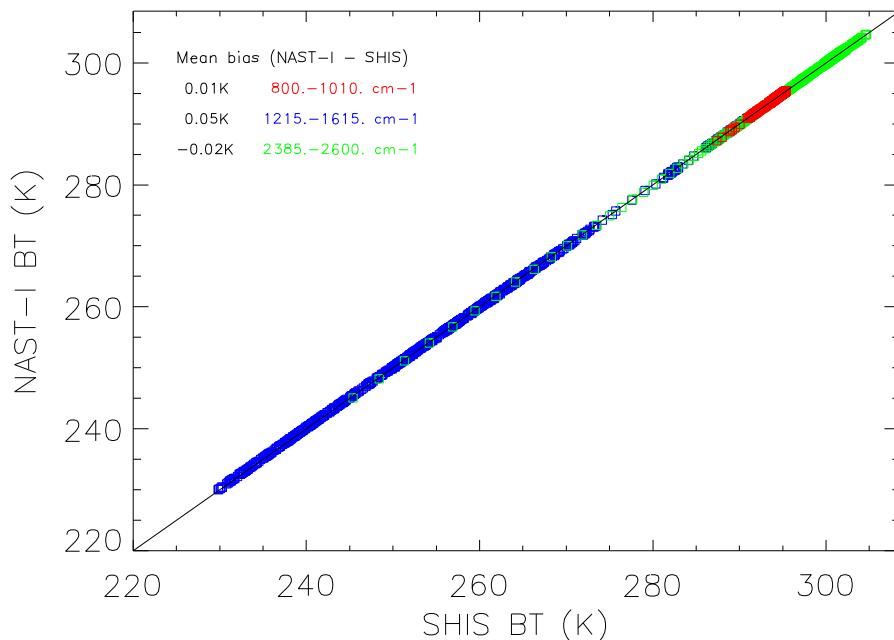


**Fig. 8.** Scatter plot of NAST-I versus S-HIS for average spectra shown in Fig. 7. The higher-resolution NAST-I data have been reduced to the S-HIS spectral resolution and spectra have been smoothed over  $10\text{ cm}^{-1}$  to better facilitate radiometric calibration inter-comparison. As indicated in the Figure, the  $800\text{--}1010$ ,  $1215\text{--}1615$ , and  $2385\text{--}2600\text{ cm}^{-1}$  spectral regions are shown.

- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)
- [Printer-friendly Version](#)
- [Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

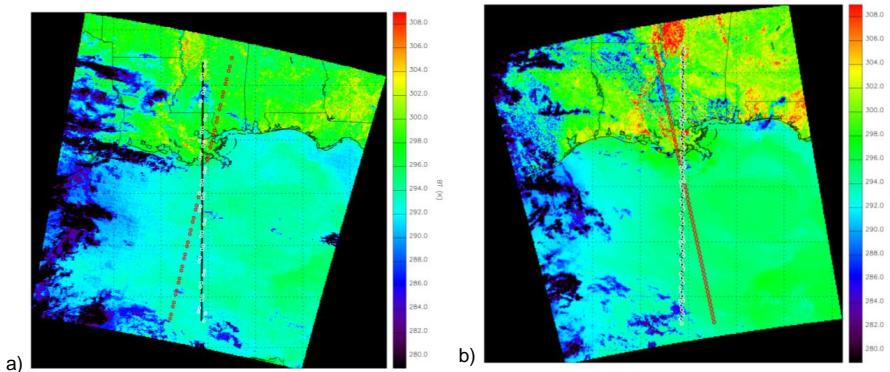

**Fig. 9.** Nadir and common cross-section lines extracted for first-order direct comparison of IASI and AIRS,  $\pm 5$  degrees latitude from sub-satellite intersection point of the satellite ground tracks for (a) IASI and (b) AIRS. Tracks are shown on top of platform imager scenes, i.e., IASI imager and Modis B31, respectively.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

◀

▶

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

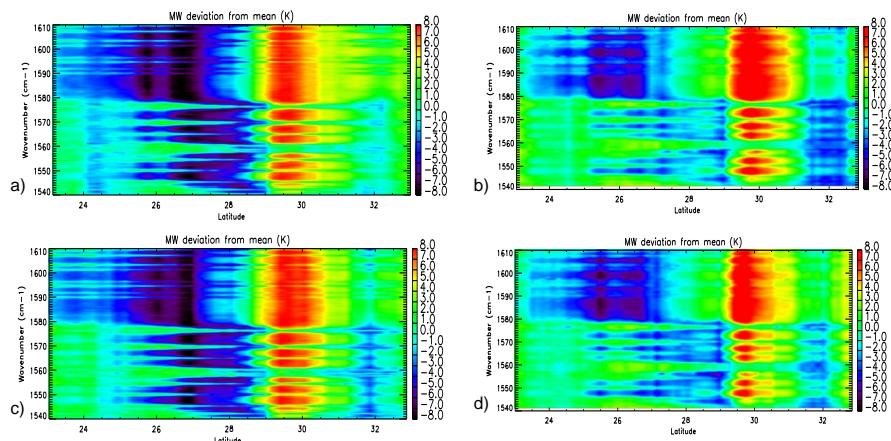

**Fig. 10.** Water vapor band ( $1540\text{--}1610\text{ cm}^{-1}$ ) latitudinal cross-sections (deviation from mean, K) along sub-satellite nadir for (a) IASI, (b) AIRS, and along a common cross-section for (c) IASI and (d) AIRS. Nadir cross-sections have point-in-space coincidence while common cross-sections have line-in-space coincidence.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

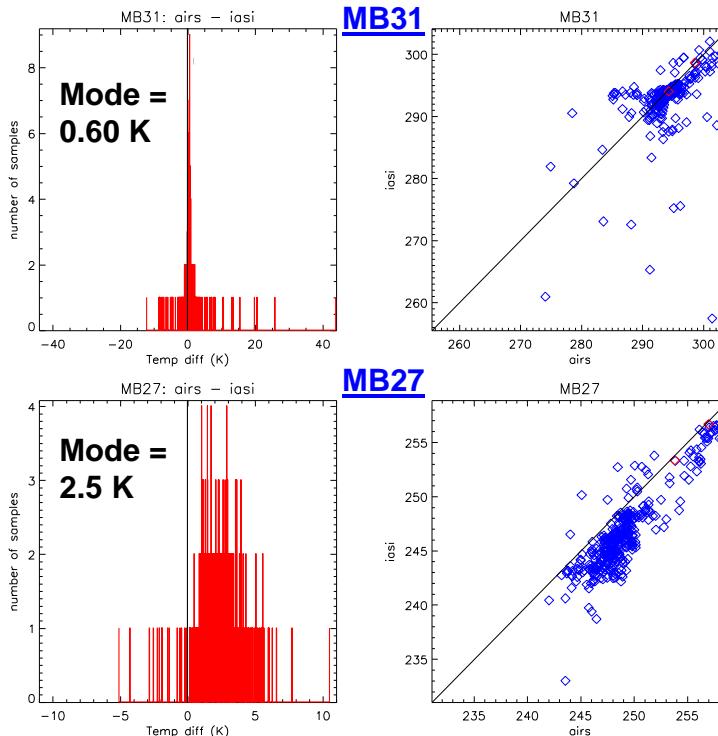

**Fig. 11.** Direct comparison of IASI and AIRS coincident IFOVs within the JAIVEx 29 April 2007 flight domain. Select Modis spectral response functions have been applied (to the IASI and AIRS spectral radiances) to illustrate scene evolution (between satellite overpasses) from a broadband difference perspective. Longwave window (MB31) and midwave water vapor (MB27) regions are shown in the top and bottom plots, respectively.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

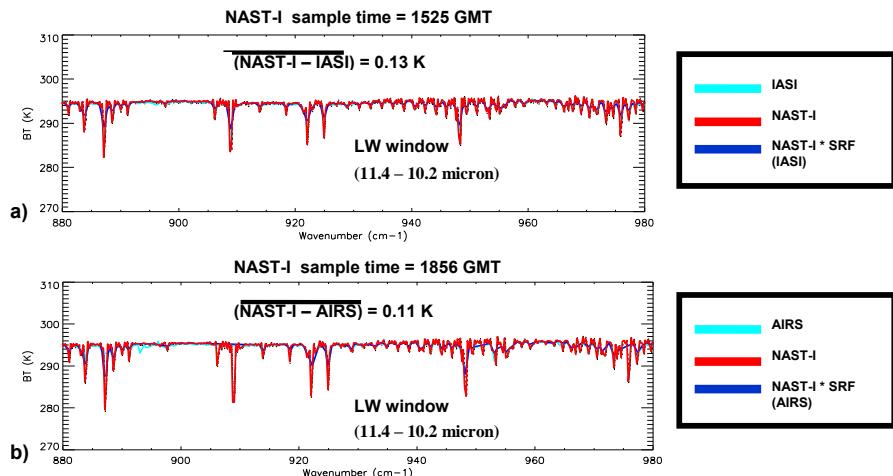

**Fig. 12.** Example infrared spectral radiance inter-comparisons for the longwave window 880–980 cm<sup>-1</sup> spectral region showing space and time coincident NAST-I relative to (a) IASI and (b) AIRS measurements.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

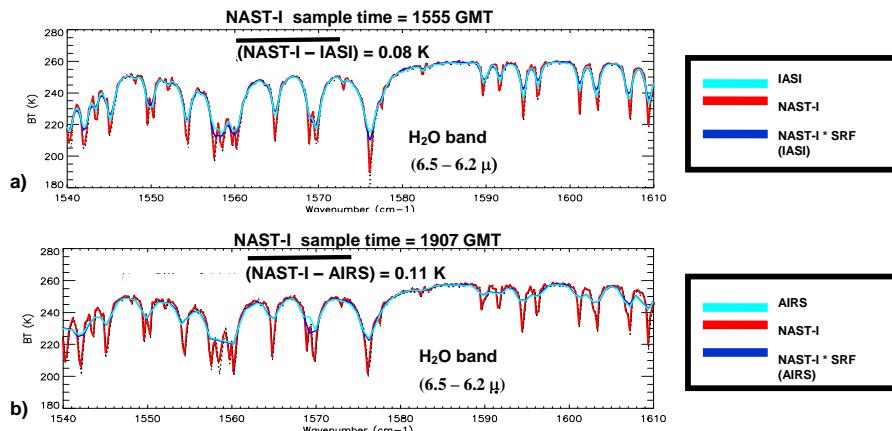

**Fig. 13.** Example infrared spectral radiance inter-comparisons for the water vapor 1540–1610 cm<sup>-1</sup> spectral region showing space and time coincident NAST-I relative to (a) IASI and (b) AIRS measurements.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

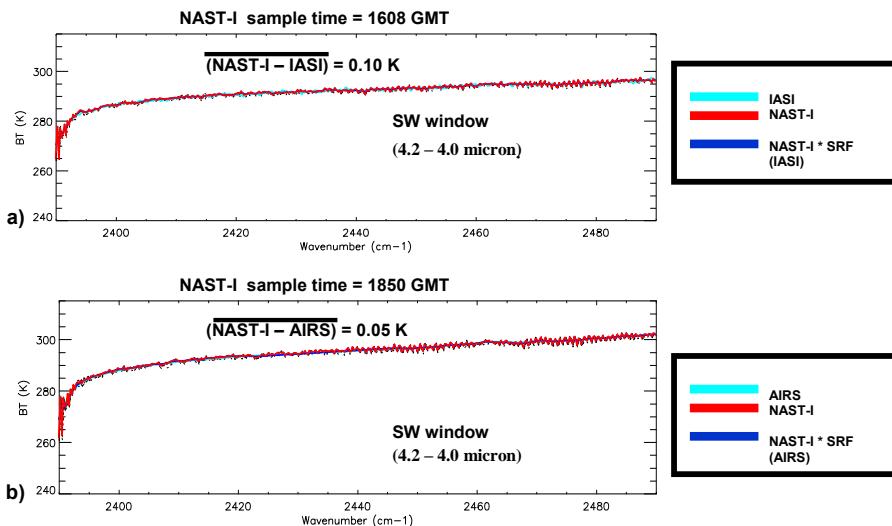

**Fig. 14.** Example infrared spectral radiance inter-comparisons for the shortwave window 2390–2490  $\text{cm}^{-1}$  spectral region showing space and time coincident NAST-I relative to (a) IASI and (b) AIRS measurements.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

◀

▶

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

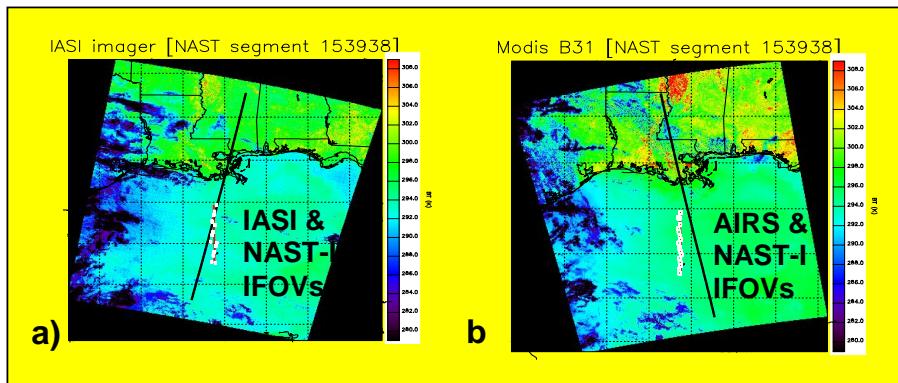

**Fig. 15.** Select NAST-I nadir tracks relative to sub-satellite tracks for (a) IASI and (b) AIRS.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[|◀](#)

[▶|](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

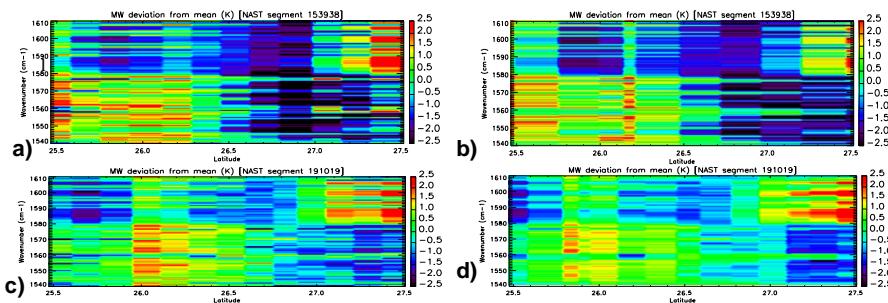

**Fig. 16.** Water vapor band ( $1540\text{--}1610\text{ cm}^{-1}$ ) spectral radiance latitudinal cross-sections for (a) NAST-I at the IASI overpass time, (b) IASI, (c) NAST-I at the AIRS overpass time, and (d) AIRS.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)


[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

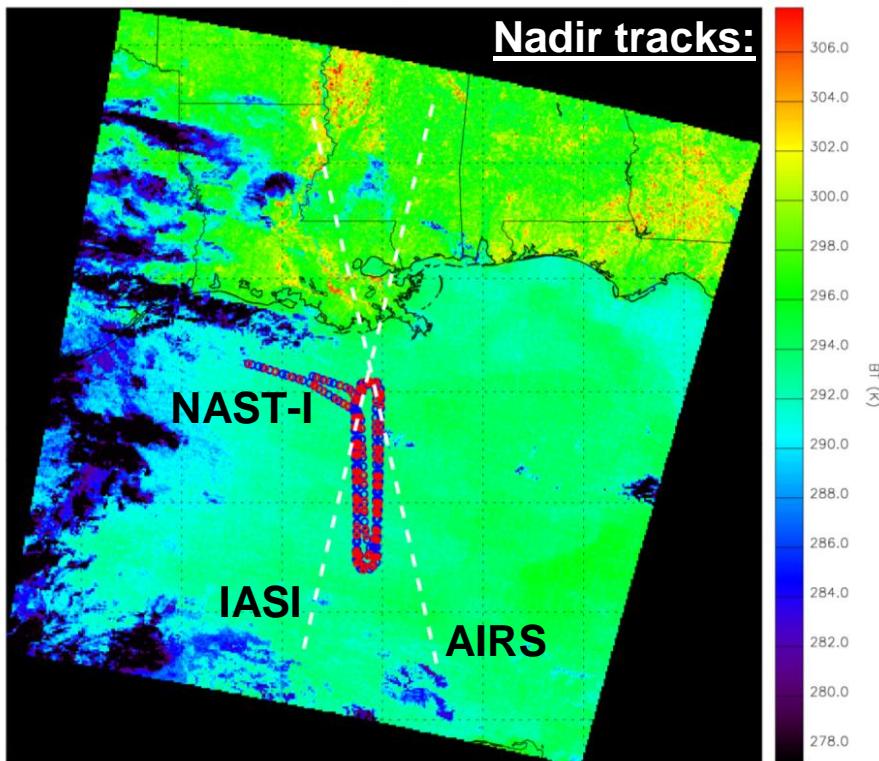

## IASI spectral radiance performance validation

A. M. Larar et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

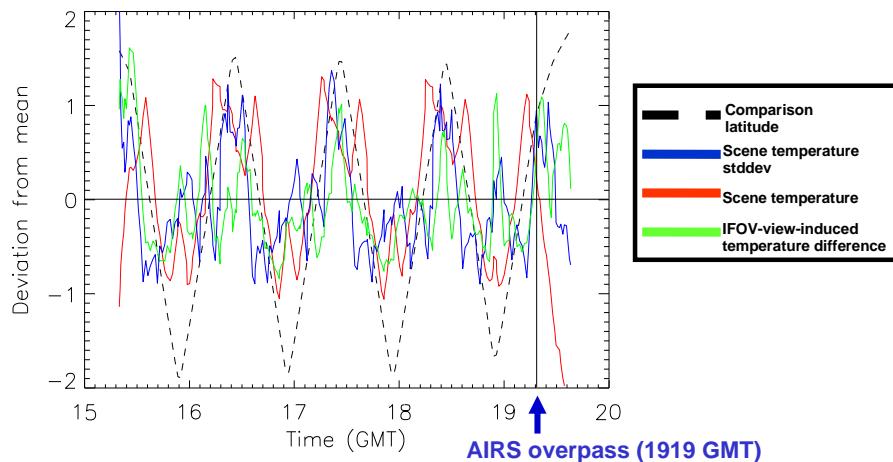

**Fig. 18.** Latitudinal variability of geophysical field as observed in aircraft/spacecraft measurement comparison. Sub-pixel Modis data are used to represent scene characteristics within AIRS IFOV positions and for view-induced differences relative to comparisons with NAST-I. Latitude, scene temperature and standard deviation, and IFOV-view-induced differences (i.e. between a/c and s/c geometries) are shown for comparison sample positions as a function of NAST-I sample time.


- [Title Page](#)
- [Abstract](#) [Introduction](#)
- [Conclusions](#) [References](#)
- [Tables](#) [Figures](#)
- [◀](#) [▶](#)
- [Back](#) [Close](#)
- [Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

## IASI spectral radiance performance validation

A. M. Larar et al.

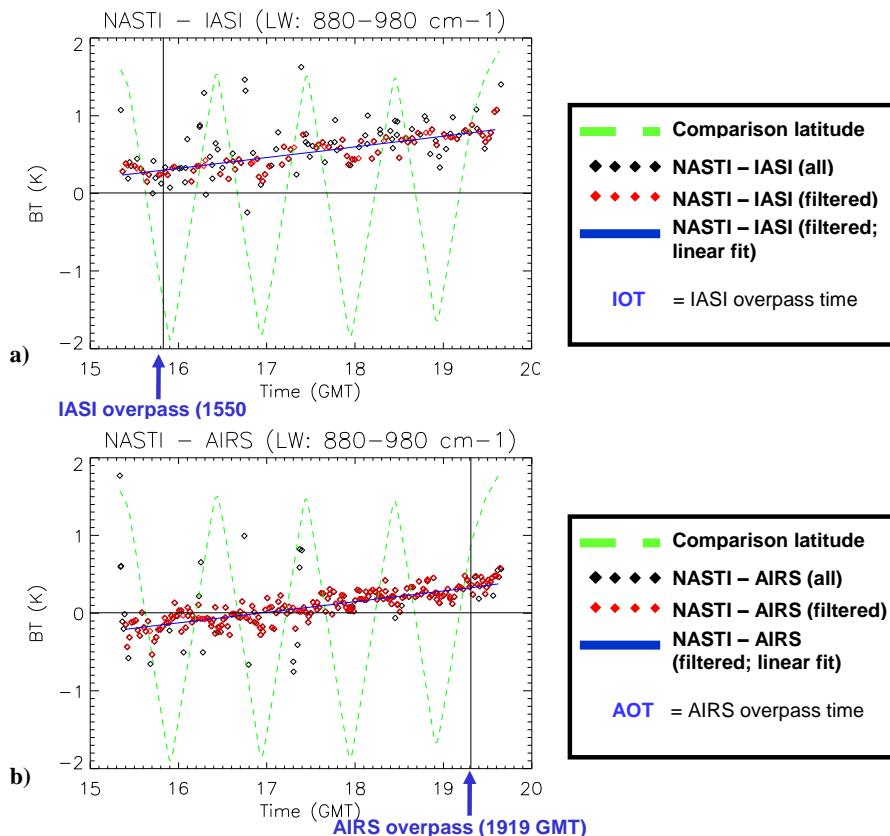

**Fig. 19.** Time series representation of (a) NAST-I – IASI and (b) NAST-I – AIRS for a long-wave spectral interval ( $880\text{--}980\text{ cm}^{-1}$ ). Space coincidence is achieved for each comparison point whereas time coincidence is only achieved at satellite overpass times.